



Chandelier Installation Instructions

Part List

Part Name	QTY/ PCS	Parts Pictures	Part Name	QTY/ PCS	Parts Pictures
Lamp Body	1		Crystal Strands Bag (A)	1x56	
E12 Bulb MAX.40W	5	bulbs not included	Gloves	1	
40MM Crystal ball	56	 (Must be)	Junction	2	
40MM Crystal ball	1	 (Substitutes)	Plastic plugs	4	
Door Buckle	56		Self-tapping Screws	4	
22#Square Beads +76#Long Strip Bag (B)	6x12		Crossbar Screws	2	
22#Square Beads +76#Long Strip Bag (B)	1x6				


Preparation before installation:

Safety Information: To avoid damaging this product, assemble it on a soft, non-abrasive surface, such as carpet or cardboard. Inspect each part for defects that may have occurred during shipping. If there is a defect in the wire, do not continue the assembly process. Keep your receipt and these instructions for proof of purchase. This product must be installed in accordance with installation instructions and all safety and building codes. 1. We recommend that all wire fixtures be installed by licensed electricians. 2. Please turn off all power supplies.

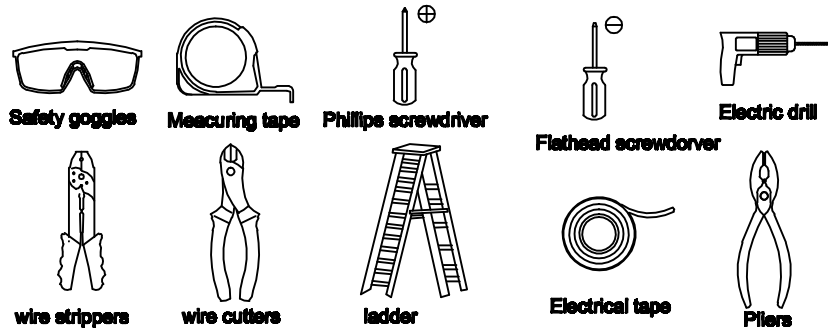

IMPORTANT: Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have occurred during shipping. If there is a defect in the wire, do not continue the assembly process.

Step1. Install the wall device and wire it.

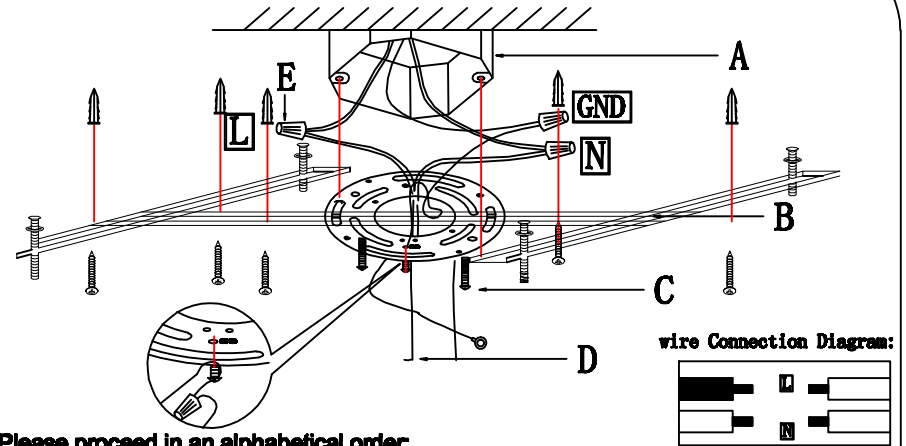

Please proceed in an alphabetical order:

A.Existing Electrical BOX B.Crossbar C.Crossbar Screws D.Wire E.Junction

Caps attach the crossbar(B) to the existing electrical box(A) using the two crossbar screws(C) fixed. Pass the main wire(D) through the crossbar(B) until the end of the main wire(D) reaches the electrical box(A) where you can wire use electrician connections. Be sure when connecting the wire use electrician approved junction caps(E). stow the excess wire in the electrical box(A)

Step2. Install the light disk, fix it with the Cap Nut, tear off the white protective film, and then install the light bulb.

The fixture can be dimmed. But it requires dimmable bulbs and a dimmer needs to be installed for this light.

(Rated 110-120V/60Hz, Bulb E12/40W maximum, LED 7W maximum)

