
# **Assembly Instructions**


### CAUTION: You must read this before you proceed.


## LEFT CHAIR

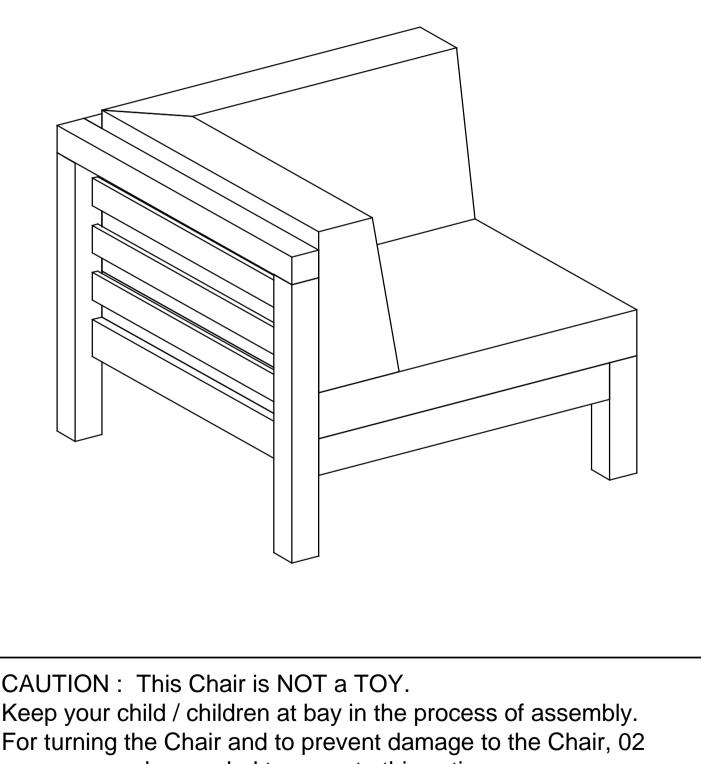

persons may be needed to execute this action.

Parts List			
No.	Picture	Description	Qty
Α		Backrest Panel	1
В		Right Arm Panel (With Pre-installed Levellers)	1
С		Left Arm Panel With Pre- installed Levellers	1
D		Seat Panel	1
E		Support Bar	1
F		Seat Cushion	1
G		Left Back Cushion	1
н		Back Cushion	1
Hardware			
No.	(d)	Description Bolts (M6x35mm)	Qty 7
2	@ <u></u>	Screws (M6x45mm)	5
3		Allen Key	<b>1</b>

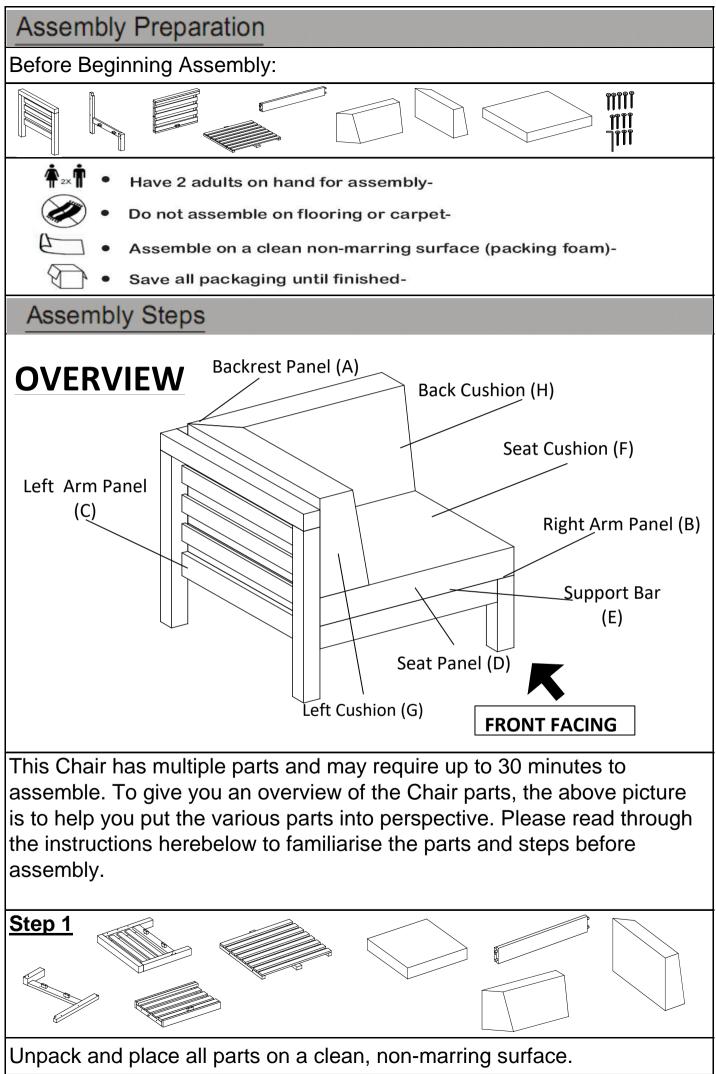

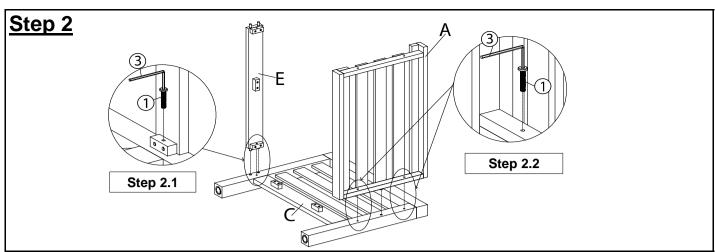

Place the Left Arm Panel (C) with inside face skywards onto a clean, soft surface to avoid any scratches or damages to the product.


**Step 2.1**: Align the dowels of Support Bar (E) into the positions in the Left Arm Panel (C).

Then, affix Support Bar (E) with Left Arm Panel (C) by using Bolt (1) and Allen Key (3).

**Step 2.2**: Attach the Backrest Panel (A) onto Left Arm Panel (C) by using Bolts (1) and Allen Key (3).

DO NOT FULLY TIGHTHEN BOLTS.

#### <u>Step 3</u>

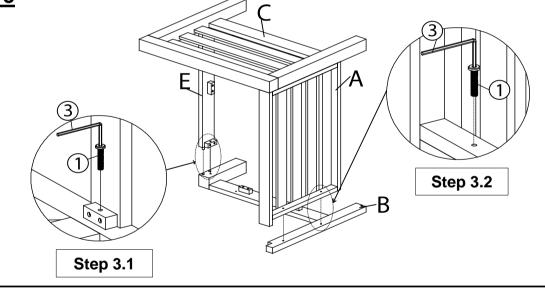


With the help of your adult partner, place Right Arm Panel (B) onto the assembled frame from Step 2

**Step 3.1**: Align the dowels of Support Bar (E) into the positions in the Right Arm Panel (B).

Then, affix Support Bar (E) with Right Arm Panel (B) by using Bolt (1) and Allen Key (3).


**Step 3.2**: Attach the Right Arm Panel (B) onto Backrest Panel (A) by using Bolts (1) and Allen Key (3).

### DO NOT FULLY TIGHTHEN BOLTS.

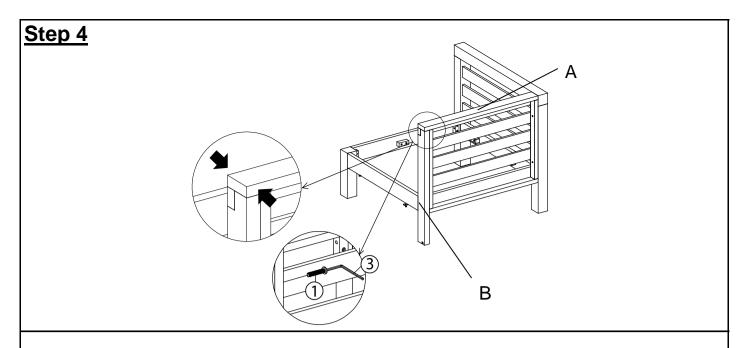


With the help of your adult partner, place the assembled in Step 3 right side up as shown above.

By hand, hold Right Arm Panel (B) and Backrest Panel (A) together tightly then secure the Right Arm Panel (B) and Backrest Panel (A) by using Bolts (1) and Allen Key (3) as shown above.

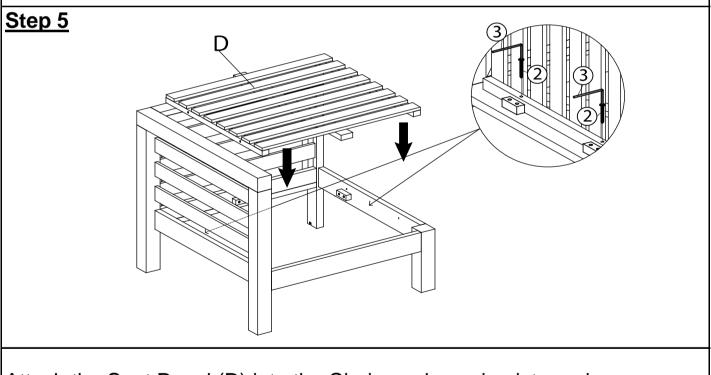

Attach the Seat Panel (D) into the Chair as shown in picture above. Affix Seat Panel (D) with Chair by using Screws ((2)) and Allen Key ((3)). Note: Using Screws ((2)) from inside to outside of Seat Panel (D) **DO NOT FULLY TIGHTHEN SCREWS.** 

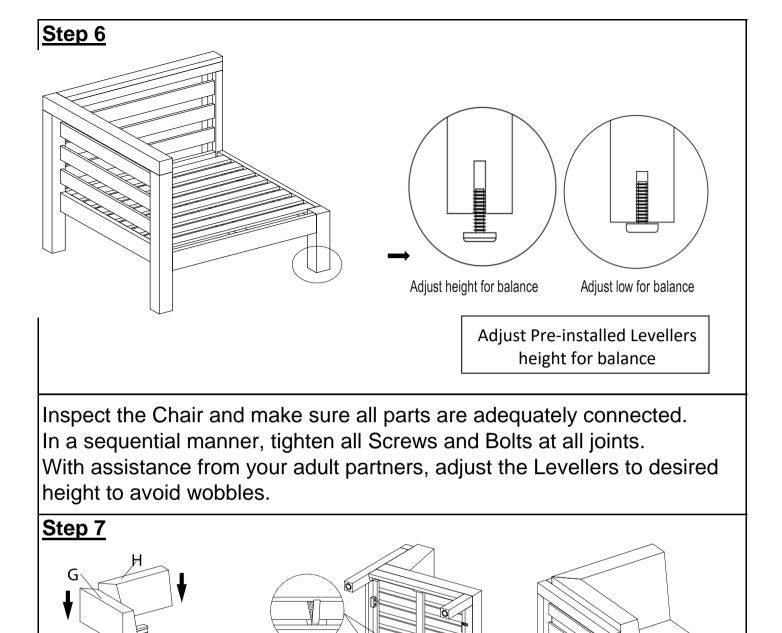

Turn the Chair right side up.

Place Seat Cushion (F), Left Back Cushion (G) and Right Back Cushion (H) to Seat Panel (D).

Inspect it and make sure all parts are adequately connected.

Ensure all screws, bolts are fully locked into position and secured.

The Chair is ready to be used.

Caution: This Chair can only be used on a flat, level surface.

