



Sunward®
Bubblemassage™ Bath
K-1164-S1G

Features

- 120 BubbleMassage™ airjets.
- Blower motor with 300 W heater and electronic user control.
- Blower motor is supplied with a grounding-type plug-in cord.
- Molded lumbar support and armrests for comfort.
- Textured bottom surface.
- Oval shape.

Material

- ExoCrylic™

Installation

- Drop-in installation.
- 72 " (1829 mm) x 42 " (1067 mm) x 20 " (508 mm)



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
UL 1795

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond

No change in measurements if connected with drain illustrated. (K-11677)

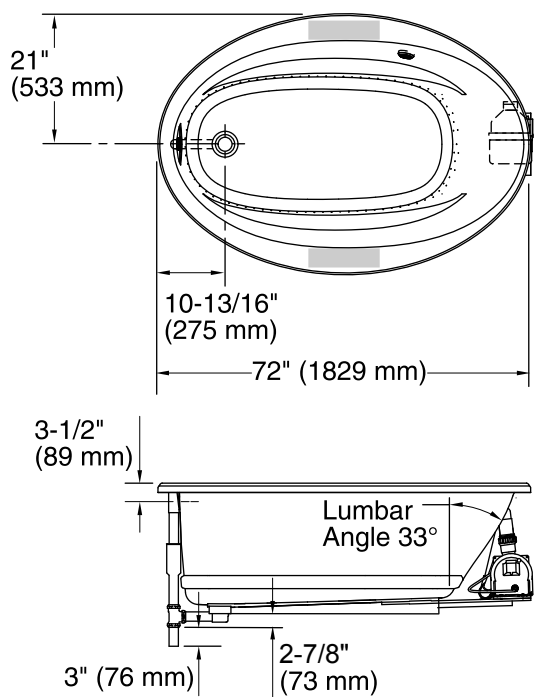


Blower/Control Access
20" (508 mm) W x
15" (381 mm) H Min

Recommended faucet area



Drop-In Rim Detail

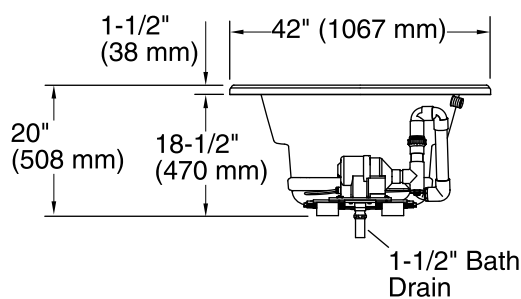

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower: 120 V, 5 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	Reversible
Basin area, bottom:	55-1/4" x 23-1/2" (1403 mm x 597 mm)
Basin area, top:	64-1/2" x 32-1/8" (1638 mm x 816 mm)
Weight:	110 lbs (49.9 kg)
Minimum floor load:	35 lbs/ft² (170.9 kg/m²)
Water depth:	15" (381 mm)
Water capacity:	75 gal (283.9 L)
Template:	Drop-in, 1042557-7, not required, not included
Under-mount kit:	K-577
Electrical rating:	Blower: 120 V, 5 A, 60 Hz

Notes

Install this product according to the installation guide.