

Large Storage Console

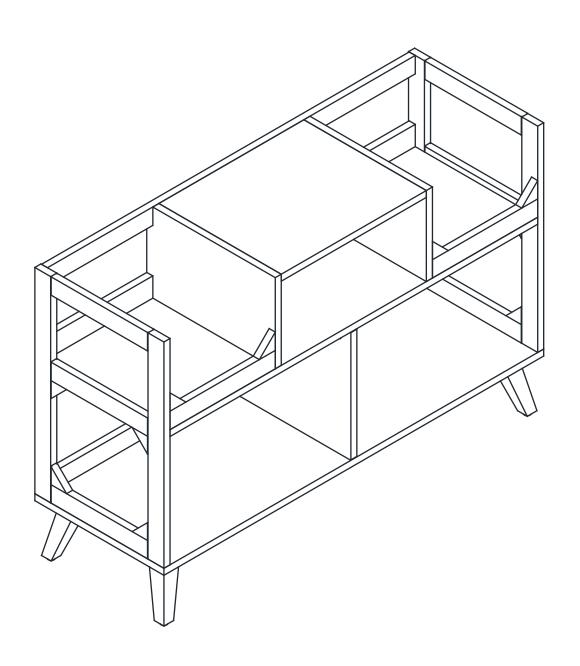

PART LIST

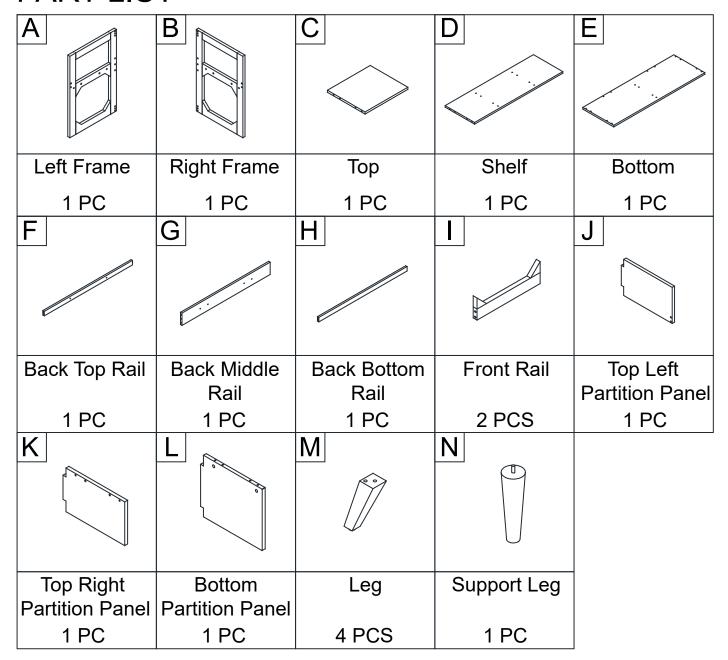


HARDWARE LIST

#1	#2	#3	#4	#5
Ø8mm*1-1/8"	Ø1/4"*1-3/4"		Ø1/4"*1-1/4"	Ø1/4"*5/8"
Wood Dowel	Long Bolt	Crescent Washer	Middle Bolt	Short Bolt
38 PCS (Extra 1)	8 PCS (Extra 1)	8 PCS (Extra 1)	16 PCS (Extra 1)	24 PCS (Extra 1)
#6	#7	#8	#9	#10
			4mm	
Metal Plate	Cam Bolt	Cam Lock	Allen Wrench	Safety Strap Kit
4 PCS	14 PCS (Extra 1)	14 PCS (Extra 1)	1 PC	1 SET

ADDITIONAL TOOLS (Not Provided)

Note: It is not recommended to use power tools during assembly.




Phillips Head Screwdriver

Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.


Step 1. Attach cam bolts (part #7) to left frame (part A), right frame (part B), shelf (part D), top left partition panel (part J) and top right partition panel (part K).

Note: Do not overtighten cam bolts. Stop tightening once threads on

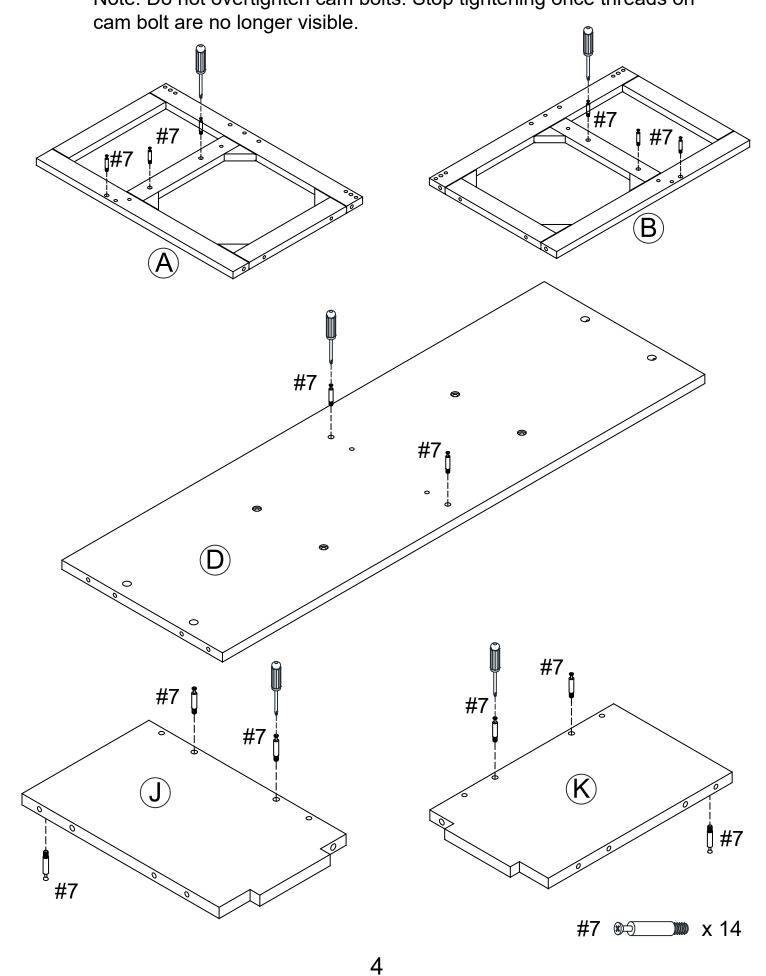


Step 2. Attach top (part C) to top left partition panel (part J) and top right partition panel (part K) using wood dowels (part #1), cam locks (part #8) and phillips head screwdriver.

Note: Cam locks must rotate a full 180°. See pictured insert.

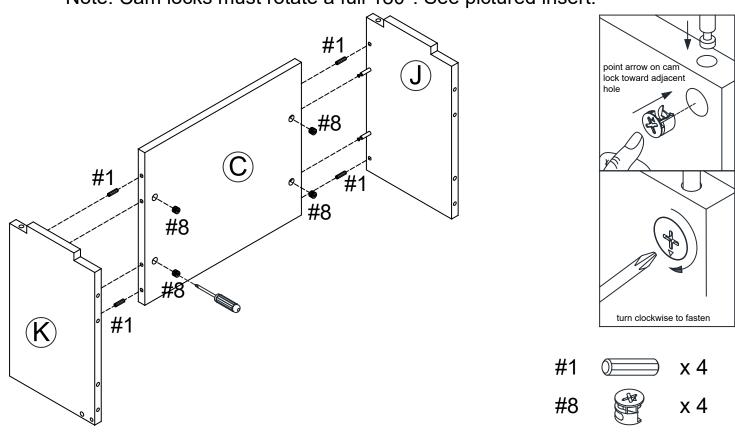


Step 3. Attach front rails (part I) to top left partition panel (part J) and top right partition panel (part K) using wood dowels (part #1), cam locks (part #8) and phillips head screwdriver.


Note: Cam locks must rotate a full 180°. See pictured insert.

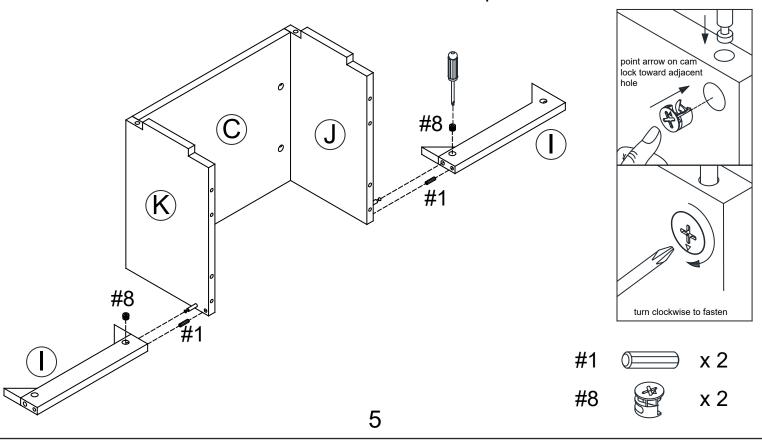


Step 4. Attach shelf (part D) to assembled unit (parts J&K) using wood dowels (part #1), middle bolts (part #4) and allen wrench (part #9).

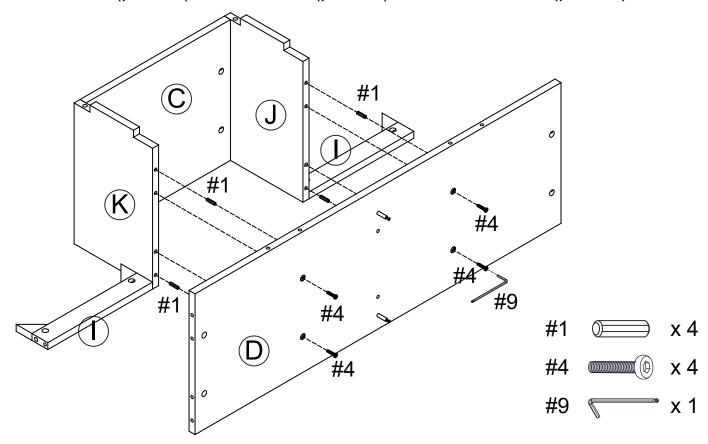

Step 5. Attach bottom partition panel (part L) to shelf (part D) using wood dowels (part #1), cam locks (part #8) and phillips head screwdriver. Note: Cam locks must rotate a full 180°. See pictured insert.

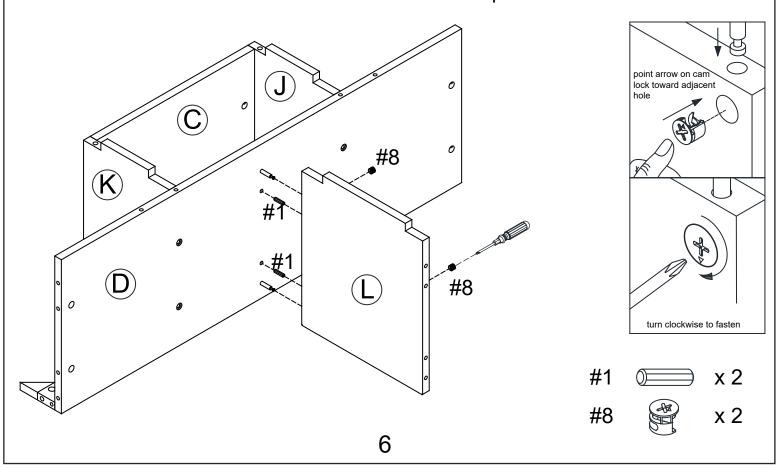

Step 6. Attach back top rail (part F) and back middle rail (part G) to assembled unit (parts D, J & K) using wood dowels (part #1), middle bolts (part #4) and allen wrench (part #9).

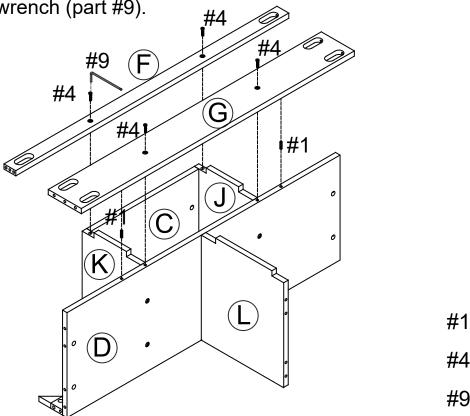


x 2


x 4

x 1

Step 7. Attach left frame (part A) to assembled unit (parts D, F, G & I) using cam locks (part #8), wood dowels (part #1), long bolts (part #2), crescent washers (part #3), allen wrench (part #9) and phillips head screwdriver.

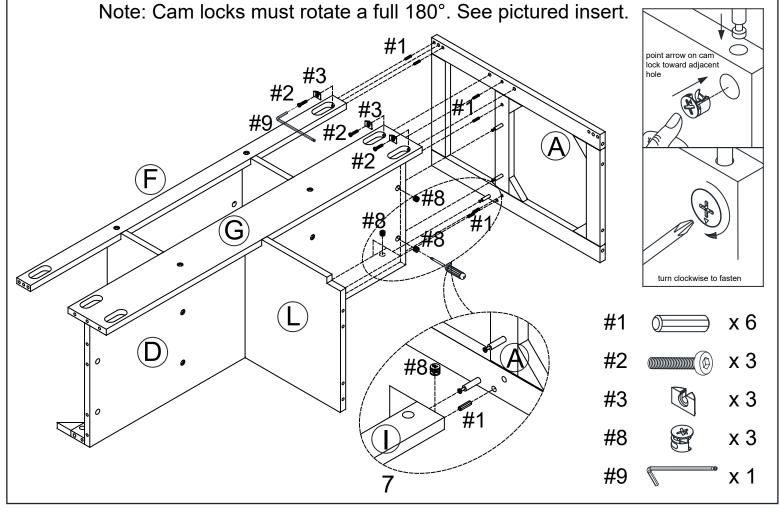


Step 8. Attach back bottom rail (part H) to left frame (part A) using wood dowels (part #1), long bolt (part #2), crescent washer (part #3) and allen

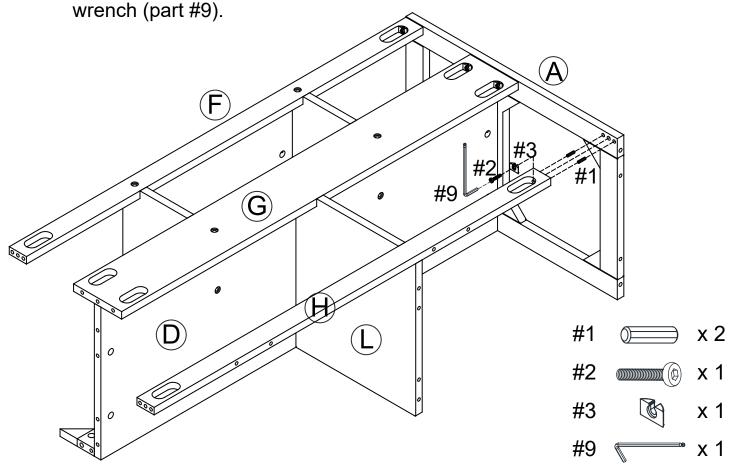


Step 9. Attach right frame (part B) to assembled unit (part D, F, G, H & I) using cam locks (part #8), wood dowels (part #1), long bolts (part #2), crescent washers (part #3), allen wrench (part #9) and phillips head screwdriver.


Note: Cam locks must rotate a full 180°. See pictured insert.

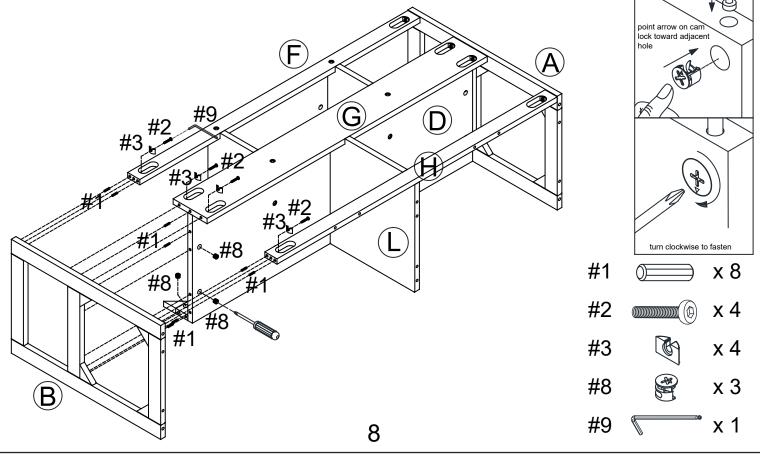

Step 10. Attach bottom (part E) to assembled unit (parts A, B, H & L) using wood dowels (part #1), middle bolts (part #4) and allen wrench (part #9).

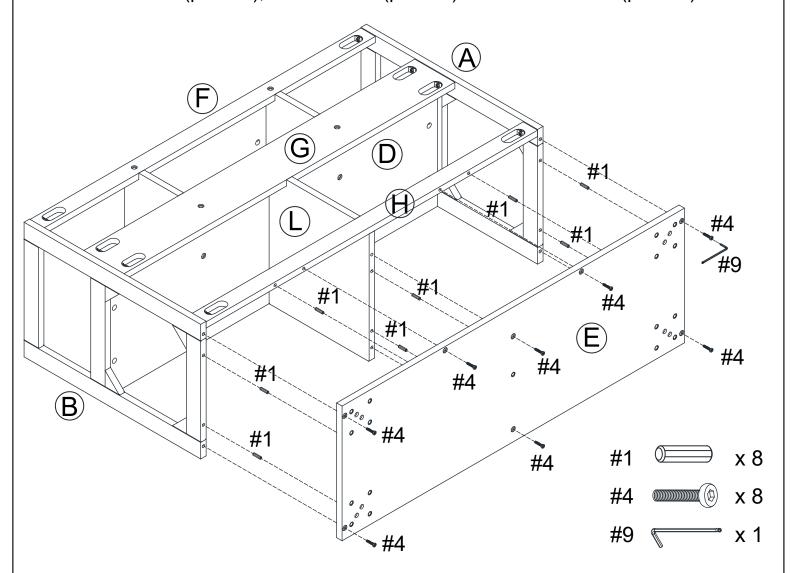


Step 11. Attach metal plate (part #6) to leg (part M) using short bolts (part #5) and allen wrench (part #9).

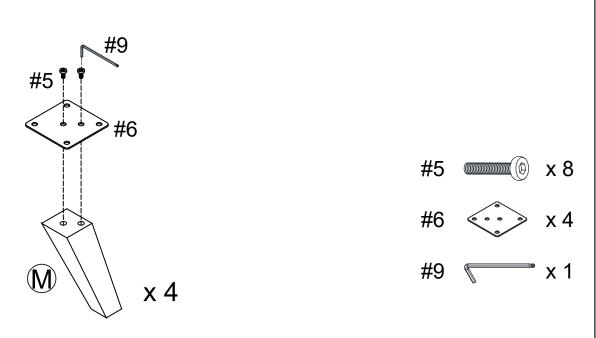

Step 12. Attach assembed legs (part M) to bottom (part E) using short bolts (part #5) and allen wrench (part #9).


Attach support leg (part N) to bottom (part E).

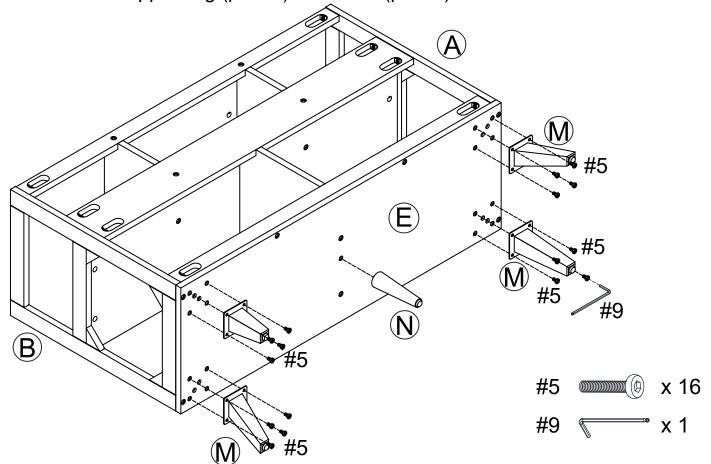

Step 13. Carefully turn unit upright.

Note: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor. if relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

Important: Safety strap kit (part #10) must be installed to prevent tipping, damage and/or injury.

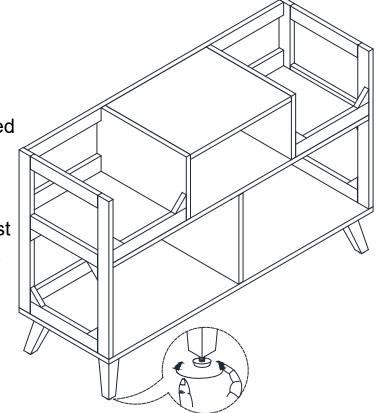

#10	Α	В	С	D	E
E.	((((((()		O Miller	Ommun	
			5/8"xØ3xD8	1-1/2"xØ4xD8	
Safety Strap Kit	Wall Anchor	Bracket	Short Screw	Long Screw	Safety Wall Strap
1 SET	1 PC	2 PCS	1 PC	1 PC	1 PC

SAFETY WALL STRAP INSTALLATION

Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

- 1. Insert short screw (C) and safety wall strap (E) through bracket (B) and attach to back top rail (part F) using philips head screwdriver.
- 2. Drill a 11/32" hole where you want to secure the unit. The drill hole will be at the same height as the hole in back top rail (part F) where bracket (B) is attached. Tap wall anchor (A) into the hole.
- 3. Insert long screw (D) and safety wall strap (E) through bracket (B) into wall anchor (A) using phillips head screwdriver.

 Note: This item is not intended for clothing storage use

