
TWO DOOR WALL CABINET WITH CUBBIES



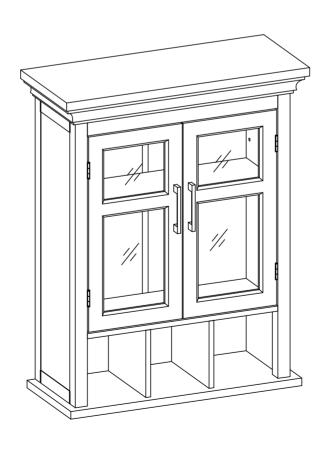

FOR REPLACEMENT PARTS OR HELP WITH

ASSEMBLY PLEASE CONTACT US

PLEASE ENSURE TO HAVE THE MODEL #

FROM THE PACKAGING OR INSTRUCTION BOOKLET

TO RETURN THE PRODUCT:

PLEASE CONTACT THE RETAILER

WHERE THE ITEM WAS PURCHASED FROM

IMPORTANT: Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

SAFETY INFORMATION

Identify all the parts and hardware. Do not discard of the packaging until you have checked that you have all of the parts and hardware required. Hardware package may have spare parts.

WARNING: This item contains small parts which can be swallowed by children and pets. Keep children and pets away during assembly. To avoid danger of suffocation, always keep plastic bags away from children and pets. We recommend that you assemble this unit on a carpeted floor to avoid scratches. If using power tools, set the tool to low torque to avoid damage.

May require 2 people for ease of assembly.


CARE and MAINTENANCE


To clean, use a soft or slightly damp cloth, then wipe with a clean, dry cloth. Dust with soft dry cloth.

Do not use ammonia-based cleaning products, as they will damage the finish. Do not leave liquids or damp cloths on this furniture.


To avoid dulling of the finish, do not place furniture in direct sunlight.


Please inspect and tighten all screws or bolts on a regular basis to ensure proper performance and safety of your item.

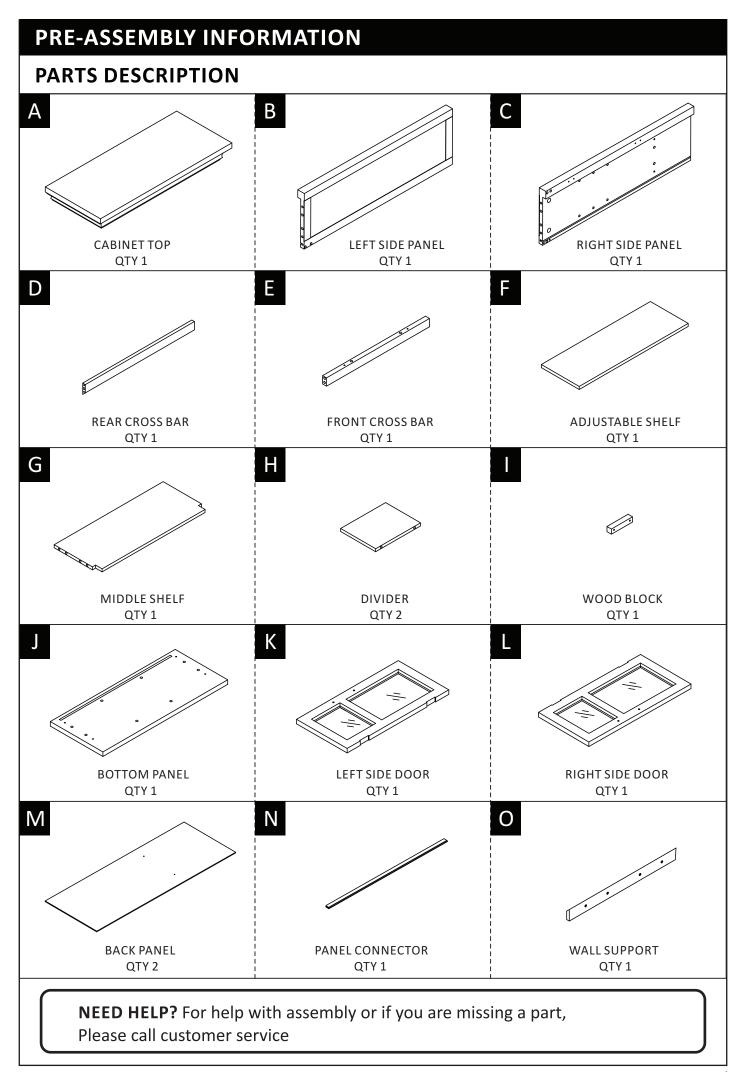

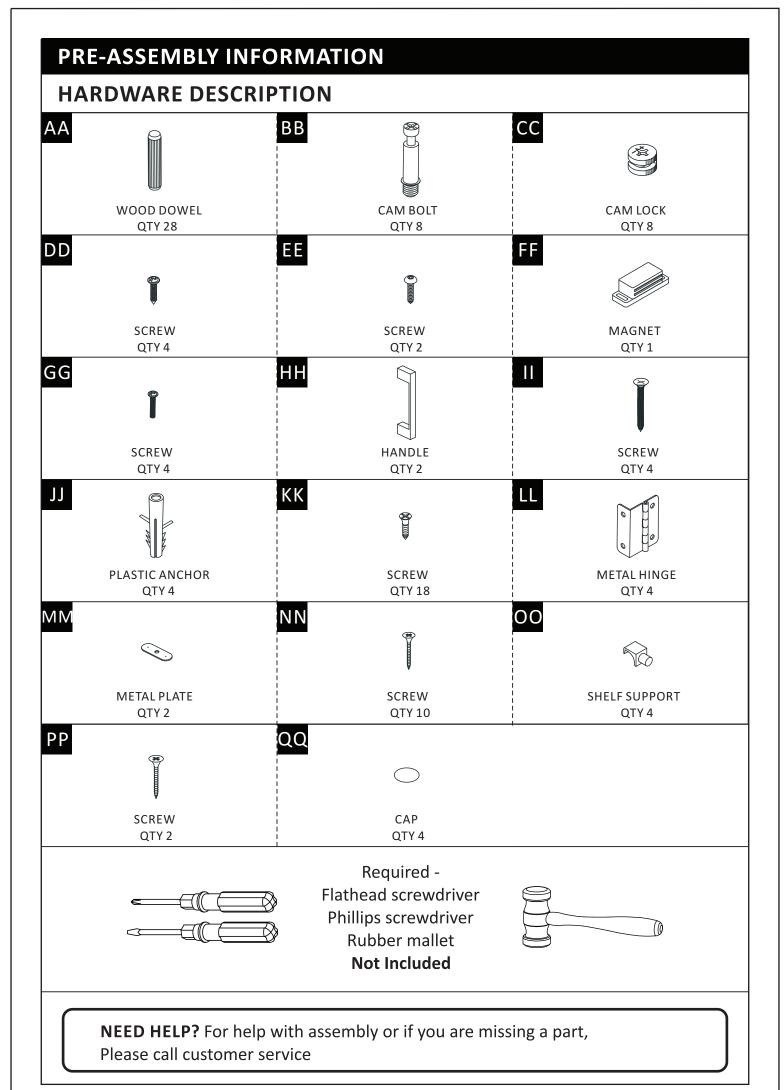


5/13

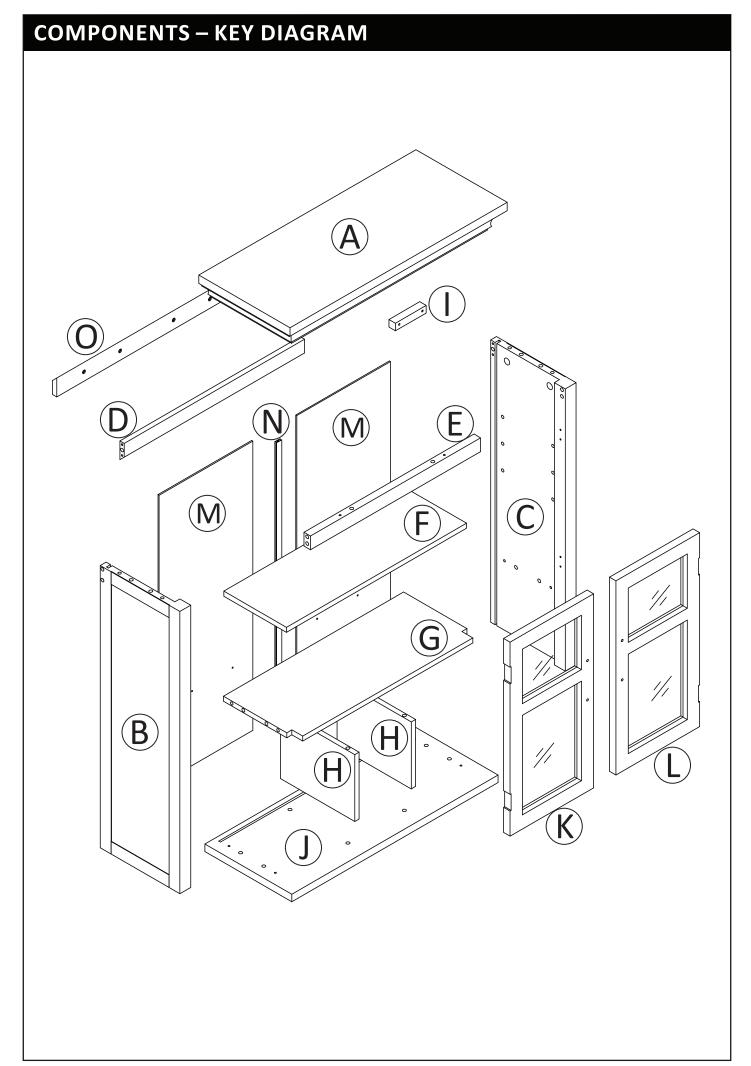

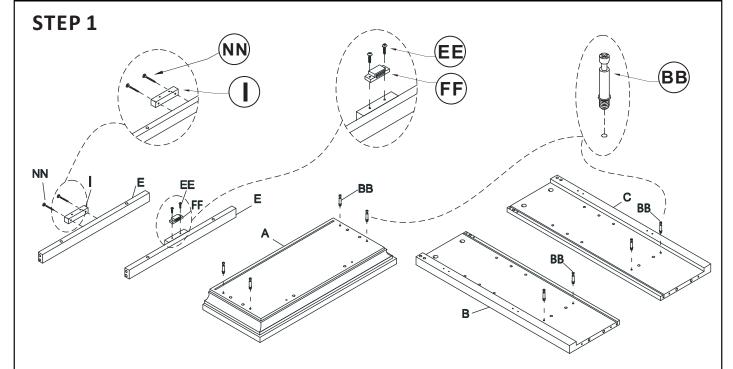


Assembling Cabinet Top, Side Panel and Front Cross Bar


- 1. Lay down the left side panel (B), right side panel (C), cabinet top (A) and front cross bars (E).
- 2. Screw eight cam bolts (BB) into the pre-drilled holes accordingly on all panels using a Phillips screwdriver.
- 3. Attach the wood block (I) to the front cross bar (E) using screws (NN).
- 4. Attach the magnet (FF) to the wood block (I) using screws (EE).

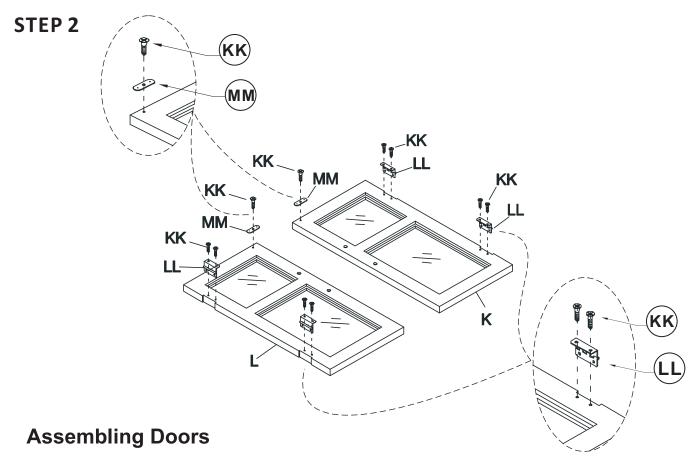

- 1. Lay down the left side door (K) and right side door (L).
- 2. Attach metal hinges (LL) and metal plates (MM) to doors (K) and (L) by inserting ten screws (KK) through the holes using a Phillips screwdriver.

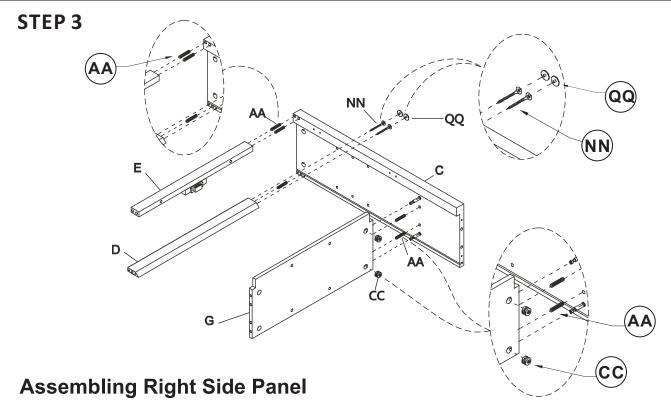


- 1. Attach the rear cross bar (D), front cross bar (E) and middle shelf (G) to the right side panel (C) by inserting five wood dowels (AA), two screws (NN) and two cam locks (CC) on the middle shelf (G). Rotate clockwise to secure cam locks (CC) in place using a Phillips screwdriver.
- 2. Cover screws (NN) with caps (QQ).

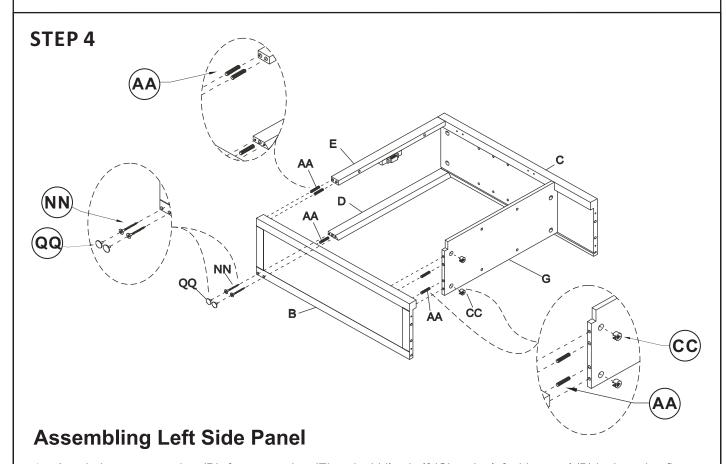


- 1. Attach the rear cross bar (D), front cross bar (E) and middle shelf (G) to the left side panel (B) by inserting five wood dowels (AA), two screws (NN) and two cam locks (CC) to the middle shelf (G). Rotate clockwise to secure the cam locks (CC) in place using a Phillips screwdriver.
- 2. Cover screws (NN) with caps (QQ).

STEP 5

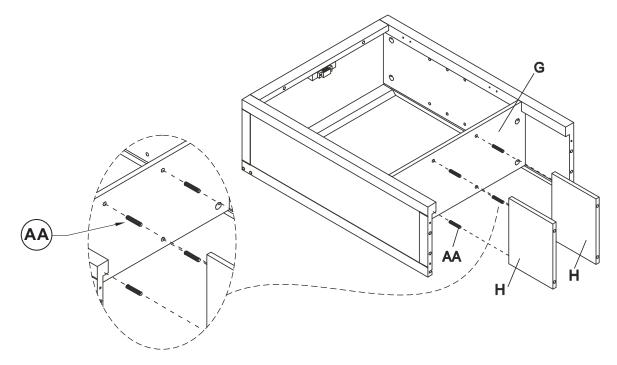

Assembling Dividers


1. Attach the dividers (H) to the middle shelf (G) by inserting four wood dowels (AA).

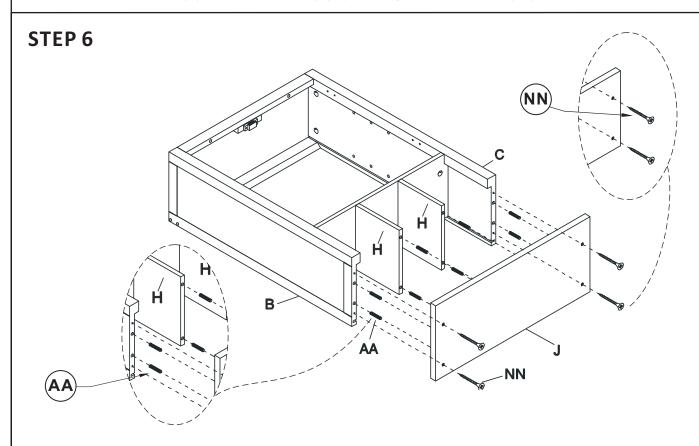

Assembling Bottom Panel

1. Attach the bottom panel (J) to the side panels (B) and (C) and dividers (H) by inserting eight wood dowels (AA) and four screws (NN).


STEP 7

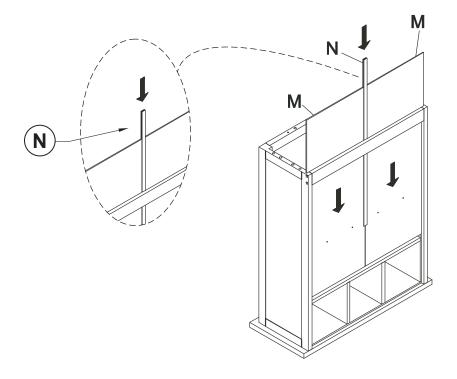

Inserting Back Panels

1. Insert the back panels (M) and panel connector (N) into the assembly.


STEP 8

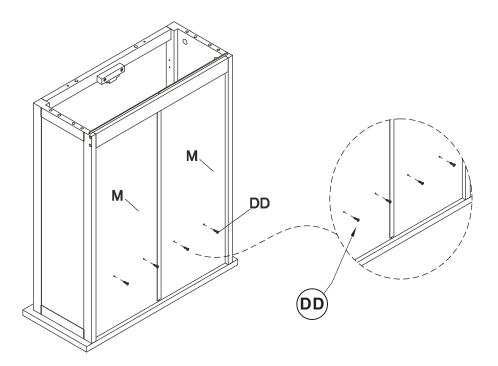

Attaching Back Panels

1. Attach the back panels (M) using four screws (DD).


STEP 9

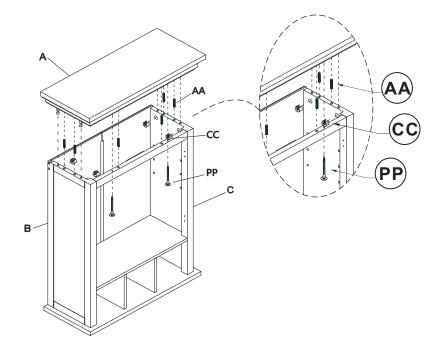

Assembling Cabinet Top

1. Attach the cabinet top (A) by inserting six wood dowels (AA) into the pre-threaded holes on the side panels (B) and (C) and rear cross bar (D). Then insert two screws (PP). Insert four cam locks (CC) into cam locks holes on the side panels (B) and (C) and rotate clockwise to secure the cam bolts in place using a Phillips screwdriver.


STEP 10

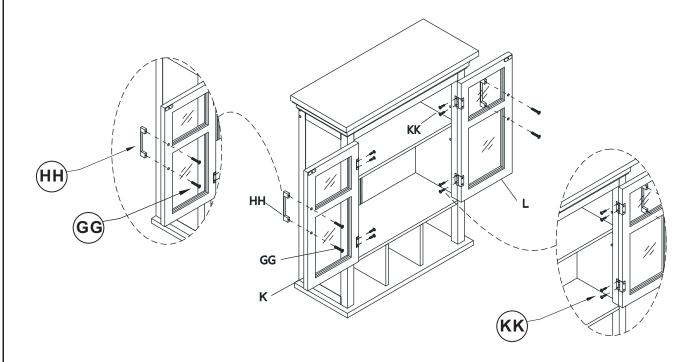

Assembling Door

- 1. Attach the doors (K) and (L) to the side panels (B) and (C) with eight screws (KK) using a Phillips screwdriver.
- 2. Attach the handles (HH) to the door with four screws (GG) using a Phillips screwdriver.


STEP 11

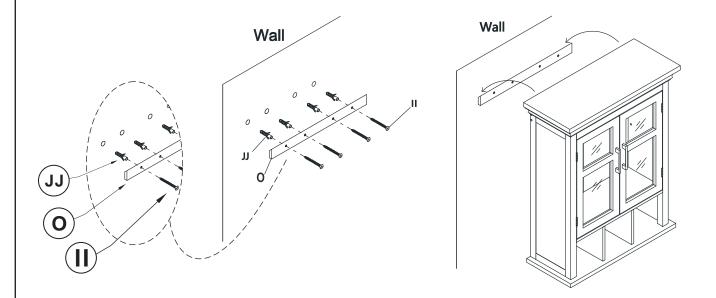

Attaching to the Wall

- 1. Using a level, position the wall support (O) in a desired location.
- 2. According to the position of the wall support (O) drill four holes in the wall.
- 3. Insert four plastic anchors (JJ) into holes on the wall then attach the wall support (O) using four screws (II).
- 4. Hang the cabinet.

STEP 12

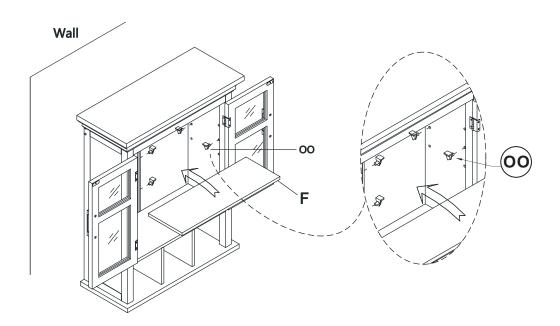

Assembling Adjustable Shelf

1. Place the adjustable shelf (F) inside the cabinet using four shelf supports (OO).

WARRANTY

Thank you for purchasing a product. These products have been made to demanding, high-quality standards and are guaranteed for domestic use against manufacturing faults for a period of 12 months from the date of purchase. This warranty does not affect your statutory rights.

In case of any malfunction of your product (failure, missing parts, etc.) please contact us at our toll free service line or by email

We reserve the right to repair or replace the defective product, at its discretion.

This product is guaranteed for 12 months if used for normal purposes. Any warranty is invalid if the product has been overloaded or subject to neglect, improper use or an attempted repair by other than an authorized agent. Heavy-duty or daily professional/commercial usage are not guaranteed.

Due to continuous product improvement, we reserve the right to change the product specifications without prior notice.