


Semi Flush Mount Ceiling Light

ASSEMBLY INSTRUCTIONS


REMOVE ALL PARTS FROM PACKAGE, BE CAREFUL NOT
TO DAMAGE ANY COMPONENTS.

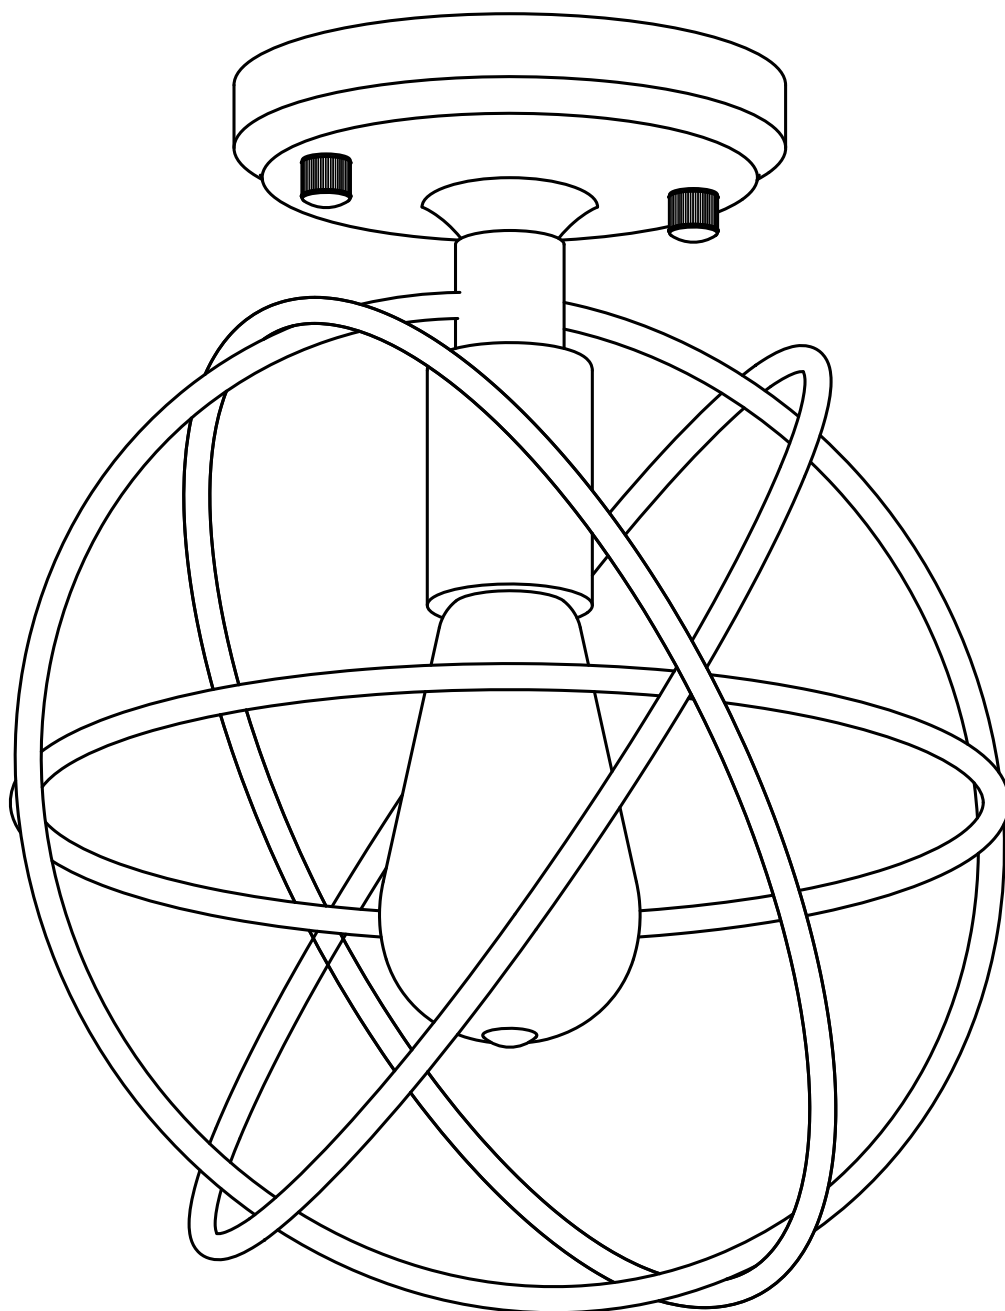


PROFESSIONAL INSTALLATION RECOMMENDED

Semi Flush Mount Ceiling Light

REMOVE ALL PARTS FROM PACKAGE, BE CAREFUL NOT TO DAMAGE ANY COMPONENTS.

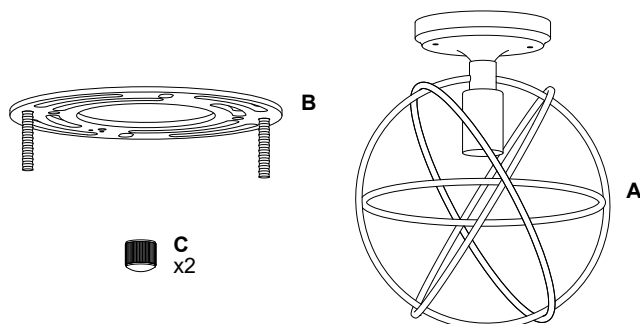

1. Detach mounting plate [B] from fixture body [A] by removing canopy nuts [C].
2. Mounting plate [B] will attach to ceiling junction box.
3. Install light to ceiling. We recommend installation by a qualified electrical professional. Secure light by reattaching canopy nuts [C] through fixture body [A] to mounting plate [B].
4. Install bulb 60W max (included).

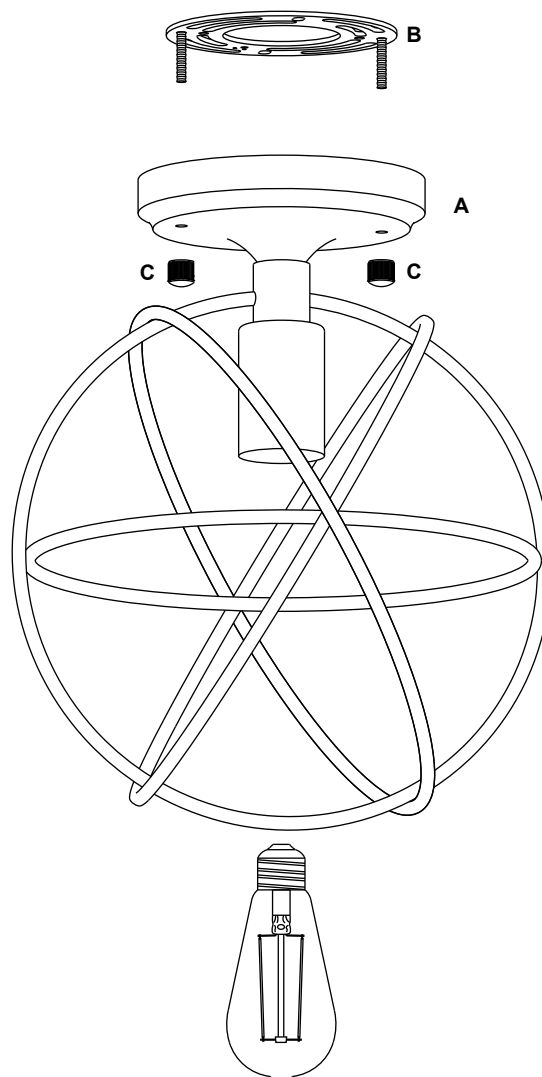

Note: Turn off switch before replacing the bulb. Make sure the bulb has sufficient time to cool down.
Do not subject the lamp to any shock while lit as shattering of glass shade may result.