SPECIFICATION SHEET
FOR FIXTURE PL /LED

REV DATE : _/ /_
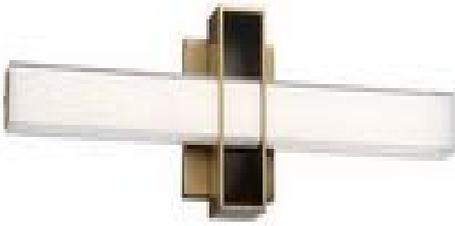
- ○ DRAFT
- ○ PROTOTYPE
- ○ FINAL--PROVISIONAL
- ● FINAL--PASSED

DESC. <u>LED Ligth Bath</u>

I2 OF 5
SKU#
Series <u>MAJOR</u>

VENDOR <u>AA03-1</u>   <u>International</u>   Min Overall height
FIX. SIZE <u>24"</u>   W <u>6"</u>   H   Max Overall height
D <u>3-1/4"</u>   E   Height adjustable

MATERIAL BREAKDOWN

	--COST--	--WEIGHT--
METAL :	<u>0</u> %	<u>49.00</u> %
BRASS :	<u>0</u> %	<u>0</u> %
GLASS :	<u>0</u> %	<u>27.00</u> %
POLY :	<u>0</u> %	<u>0</u> %
CLOTH :	<u>0</u> %	<u>0</u> %
OTHER :	<u>0</u> %	<u>24.00</u> %

DRAWING/PHOTOS   **SHADE TOP VIEW**

MATERIAL <u>STEEL + GLASS</u>   REMARK
FINISH <u>575</u>   <u>Aged Brass</u>

SHADE CODE   SHAPE   SHADE SIZE
SHADE SIZE   <u>0</u> W   <u>0</u> H   <u>0</u> L(E)   FINISH
MATERIAL   PANEL   PIPING
GLASS CODE <u>PG1523</u>   GLASS SIZE   <u>1.750</u> W   <u>23.900</u> H   <u>1.750</u> L(D)   SIZE
FINISH   <u>Frosted Aquarium</u>   OTHERS <u>1pc</u>
BACK PLATE/Canopy Width <u>5"*0.75"</u>   BACK PLATE/Canopy Height <u>4-3/4"</u>   Center to top of fixture <u>3"</u>
Center to bottom of fixture <u>3"</u>   Slope <u>Non</u>

HOW TO INSTALLATION <u>H07</u>   <u>Others</u>   FINISH
SHADE TO FIXTURE

Elec.wirelength <u>L01</u>   <u>7"</u>   GAGE <u>1813</u>   <u>18AWG, 200℃, 600V</u>
OTHERS   COLOR <u>06</u>   <u>Black & White</u>

CHAIN LENGTH   THICKNESS   MATERIAL
FINISH

PRIMARY LAMPS
BULBS TYPE <u>Z30</u>   <u>25W LED</u>   SOCKET TYPE <u>Y29</u>   <u>25W LED Module</u>
BULBS Q'TY   <u>1</u> PCS   WATT <u>25</u>   W
BULBS SUPPLIED ● YES ○ NO   Q'TY   <u>1</u> PCS   WATT   <u>25.0</u> W
SECONDARY LAMPS
BULBS TYPE   SOCKET TYPE
BULBS Q'TY   <u>0</u> PCS   WATT <u>0</u>   W
BULBS SUPPLIED ○ YES ● NO   Q'TY   <u>0</u> PCS   WATT   <u>0.0</u> W
THIRD LAMPS
BULBS TYPE   SOCKET TYPE
BULBS Q'TY   <u>0</u> PCS   WATT   <u>0</u> W
BULBS SUPPLIED ○ YES ● NO   Q'TY   <u>0</u> PCS   WATT   <u>0.0</u> W
Supplier <u>19</u>   <u>Giant Force</u>   Model No. <u>Samsung 2835 AC 120V 120PCS</u>
TOTAL WATT <u>25</u>   W   Color TEMP <u>3000</u>   K   Delivered Lumen <u>1780.9</u>   LM
Rated Hours <u>30000</u>   Initial Lumen <u>2266.0lm</u>   CRI <u>92.3</u>

SOCKET ☐ PORCELAIN   ☐ PHENOLIC   ☐ SCREW SHELL   OTHERS <u>AC LED</u>
☐ W / METAL SLEEVE   ☐ W / POLY SLEEVE   ☐ W / PLASTIC SLEEVE   COLOR

SPECIFICATION SHEET
FOR FIXTURE PL /LED

○ **DRAFT**
○ **PROTOTYPE**
○ **FINAL--PROVISIONAL**
● **FINAL--PASSED**

DATE : 2020/01/13   **REV DATE :** __/ /__

Power sources	Supplier	Model No.
SPEC	Dimmable CFL&LED	Photocell ○ YES ● NO

0 PCS/INNER BOX   INNER BOX SIZE   0 L   0 W   0 H   BOX CUBE   0

○ COLOR BOX   ○ COLOR LABLE W/WHITE BOX ○ BROWN BOX W/LINE DRAWING ● OTHER

PACKING FOR ONE PACK   1 PCS/MASTER CARTON
PACKING FOR TWO PACK   0 PCS LAMP BODY/MASTER CTN   0 PCS SHADES/PCS MASTER CTN

○ COLOR BOX   ○ COLOR LABLE W/WHITE BOX ● BROWN BOX W/LINE DRAWING ○ OTHER

	L	W	H		CUBE
CTN SIZE FOR ONE PACK	26.750 L	5.750 W	10.250 H	CTN CUBE	0.912
CTN SIZE FOR TWO PACK	0 L	0 W	0 H	CTN CUBE	0
CTN SIZE FOR LAMP BODY	0 L	0 W	0 H	CTN CUBE	0
CTN SIZE FOR SHADE	0 L	0 W	0 H	CTN CUBE	0

N.W.	0 KGS/INNER BOX	N.W.	1.900 KGS/CTN
G.W.	0 KGS/INNER BOX	G.W./ONE PACK	2.490 KGS/CTN
N.W./2 PACK	0 KGS/CTN FOR LAMP	N.W.	0 KGS/CTN FOR SHADE
G.W./2 PACK	0 KGS/CTN FOR LAMP	G.W.	0 KGS/CTN FOR SHADE

CERTIFICATE : ETL   UPS Shippable : Yes
ENVIRONMENTAL LOCATION : DAMP   Safety cable required : No
REMARK :