

USER MANUAL

Please read and understand this manual before any assembly or installation, compare the details with the product display presentation, and ensure that all parts are in place.



If you have any questions, please feel free to contact us.

Package contents



Before installation


Do this first!

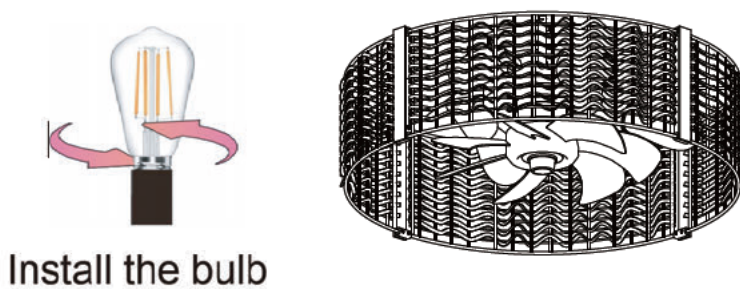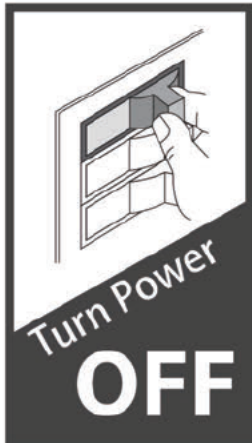

Installation

1. Secure the combined lampshades using the provided screws.
2. Remove the hanging plate and use a wrench to attach the support rods to the lamp body.
3. Attach the lampshade to the lamp body using the provided screws.
4. Install the mounting plate onto the ceiling using the provided screws.
5. Hanging the hook to the mounting plate and connect the wires as shown in the diagram.
6. Align the L-shaped slots on the lamp body with the mounting plate, then secure the lamp body with a screwdriver.

Remote Operation

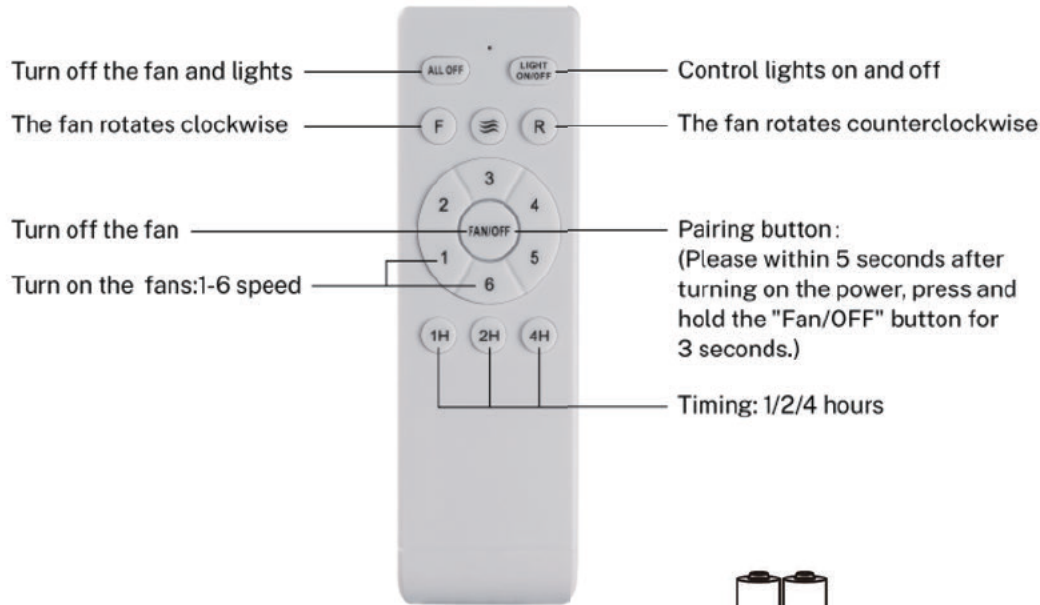

Need 2*AAA batteries

Security and Maintenance

- Before installing, maintaining or cleaning the unit, make sure that the circuit breaker box is turned off or the main fuse is removed to ensure safety.
- Make sure all electrical connections comply with codes. If you do not have adequate electrical knowledge or experience, please seek a qualified licensed electrician.
- Mount to the outlet box marked acceptable for fan supported. The box must be supported directly by the building structure. The stability of the outlet box is essential to reduce fan noise and wobble.
- All set screws must be carefully checked, and re-tightened where necessary, before and during installation.
- After making electrical connections, turn the connected wires upward and carefully push them up into the socket box. The wires should be spread apart with the grounded conductor on the outlet box.
- Indoor use only. Do not use the fan in a specific like high temperature/radiation/lampblack, damp or other abnormal environment.
- Do not insert foreign objects between rotating fan blades.
- Children should be supervised to ensure that they do not use appliances as a toy.
- At least twice each year, lower the canopy to check assembly and tighten all screws on the fan.
- Use a soft clean dry dust cloth or lightly dampened cloth to clean.

- **Pair Code:** Turn on the wall switch, and you will hear a beep sound. Within 2 minutes, press the "FAN" button until you hear two beeps, indicating successful pairing between the fan and the remote. If it fails, turn off the wall switch, wait for 1 minute, and repeat the process.
- **Attention:** The remote has been pre-programmed before leaving the factory, so after installing the fan light, you can directly use the remote to operate it. The code pairing is only necessary if the remote is installed with batteries but cannot control the fan light properly.