


FRONT VIEW

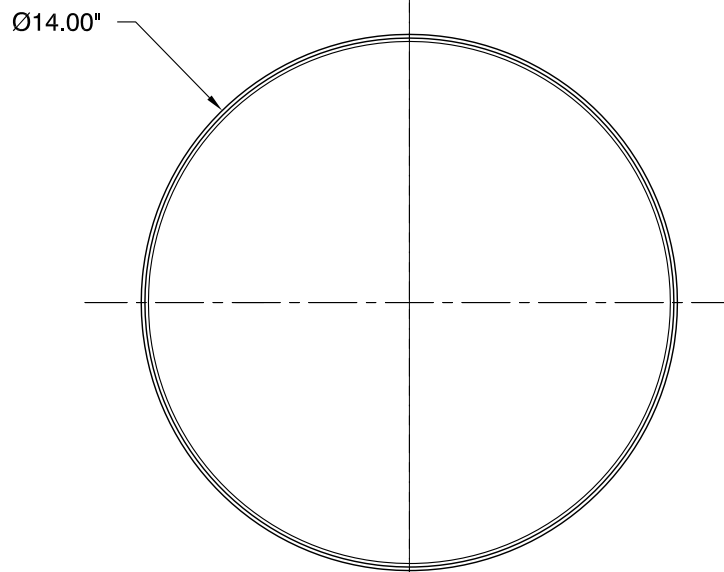

BOTTOM VIEW

ceiling mount

120v

277v

LAMPING

- o (2x) 10.1w LED Arrays
- o 3000K, 350mA (ea.)
- o Initial Lumens: 2920 lm
- o Delivered Lumens: 1160 lm
- o CRI > 80
- o Color Consistency: 3 step MacAdam Ellipse

DRIVER (Dimmable)

- o (2x) 0-10v & Reverse Phase Dimming
- Constant Current, 12w, 350mA

METAL FINISHES

- o **14** - Polished Chrome
- o **24** - Satin Nickel

DIFFUSER

- o Matte White Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o Ø14.00" x 4.09"(h)

INSTALLATION

- o 4" Octagonal J-Box
- o ETL Dry/Damp Listed
- o Conforms to UL STD 1598
- o Certified CAN/CSA
- STD C22.2 No. 250.0

Sample Catalog Number



Series # **Finish** **Catalog number**

PROJECT: _____

DATE: _____

