






# Installation

Hardware List		Hardware List	
 Seat	1	 Support leg	1
 6x20mm screws and washers	4	 Hexagonal screw tap	1





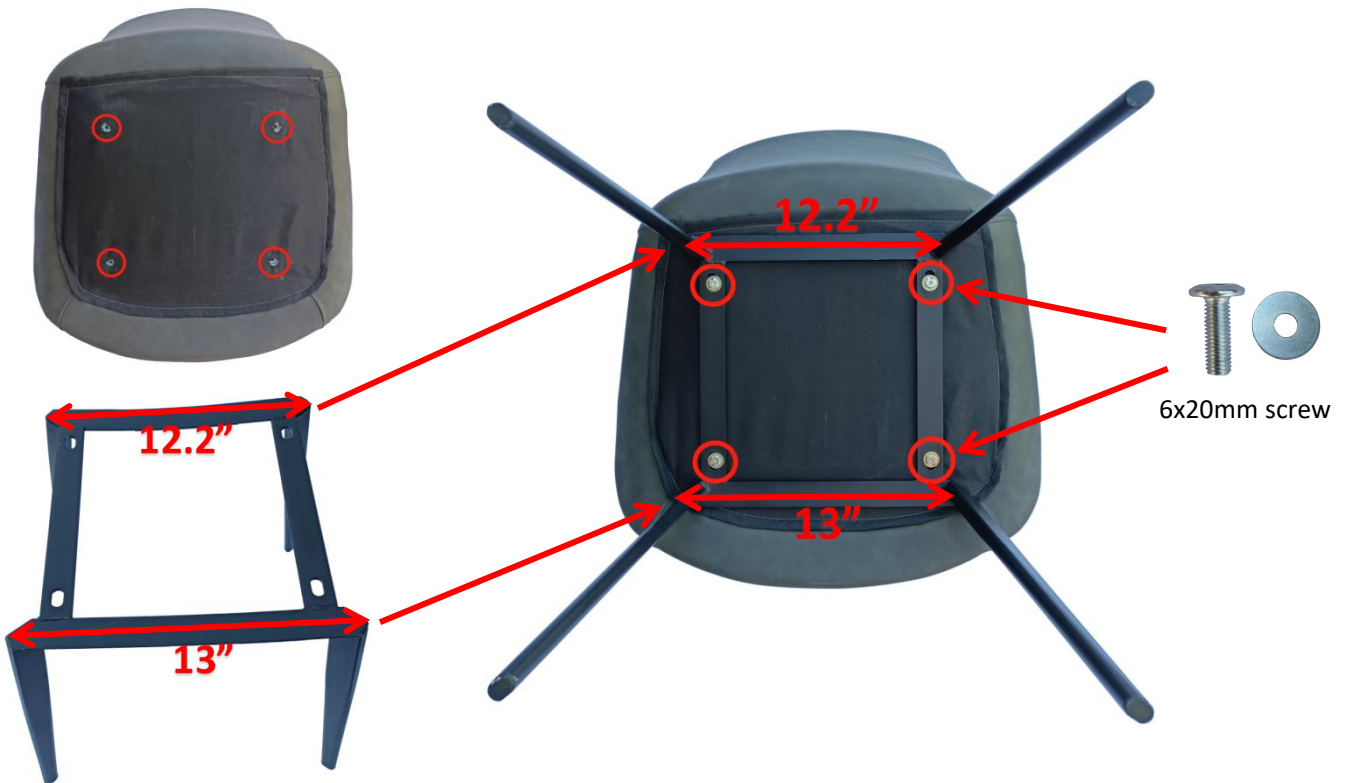



1




Note: The wider side (13") of the support foot corresponds to the front edge of the seat. The narrow side (12.2") corresponds to the back edge of the seat. Fix with 6x20mm screws.



# Installation

Hardware List		Hardware List	
 Table top	1	 Table pillar	1
 Table bottom board	1	 Desktop connection board	1
 8x25mm screw	8	 8x30mm screw	4
 Washer	4	 Hexagonal screw tap	1


1

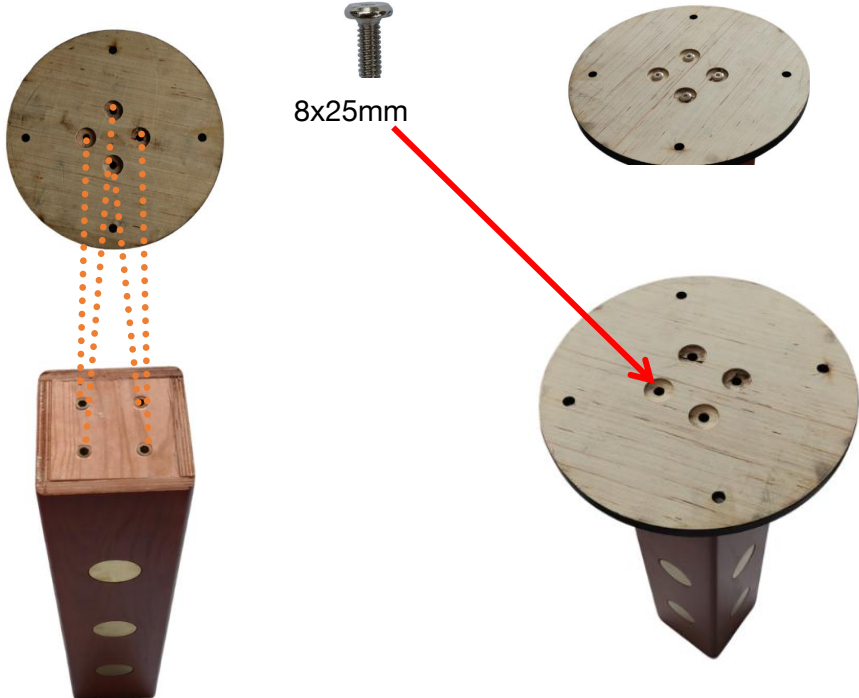

8x25mm

The desktop connection board is tightened with 8\*25

2

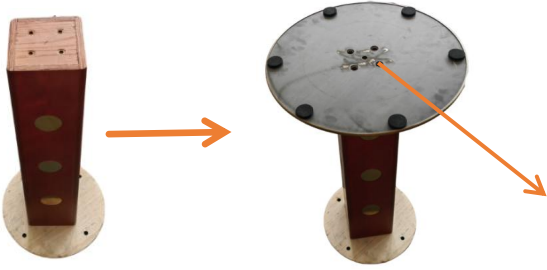


Then tighten the bottom board of the table with 8\*25 screws, and the table base is installed.



8x25mm screw

3

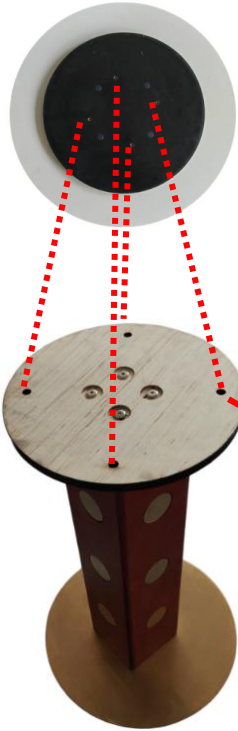

8x30mm

Put the table top on the table leg, make sure the reserved screw holes of the table top and the frame are corresponding, tighten 8x30mm screws to finish the installation.

8\*25 screws are needed to install the glass desktop, and screws should be matched according to the desktop.

