
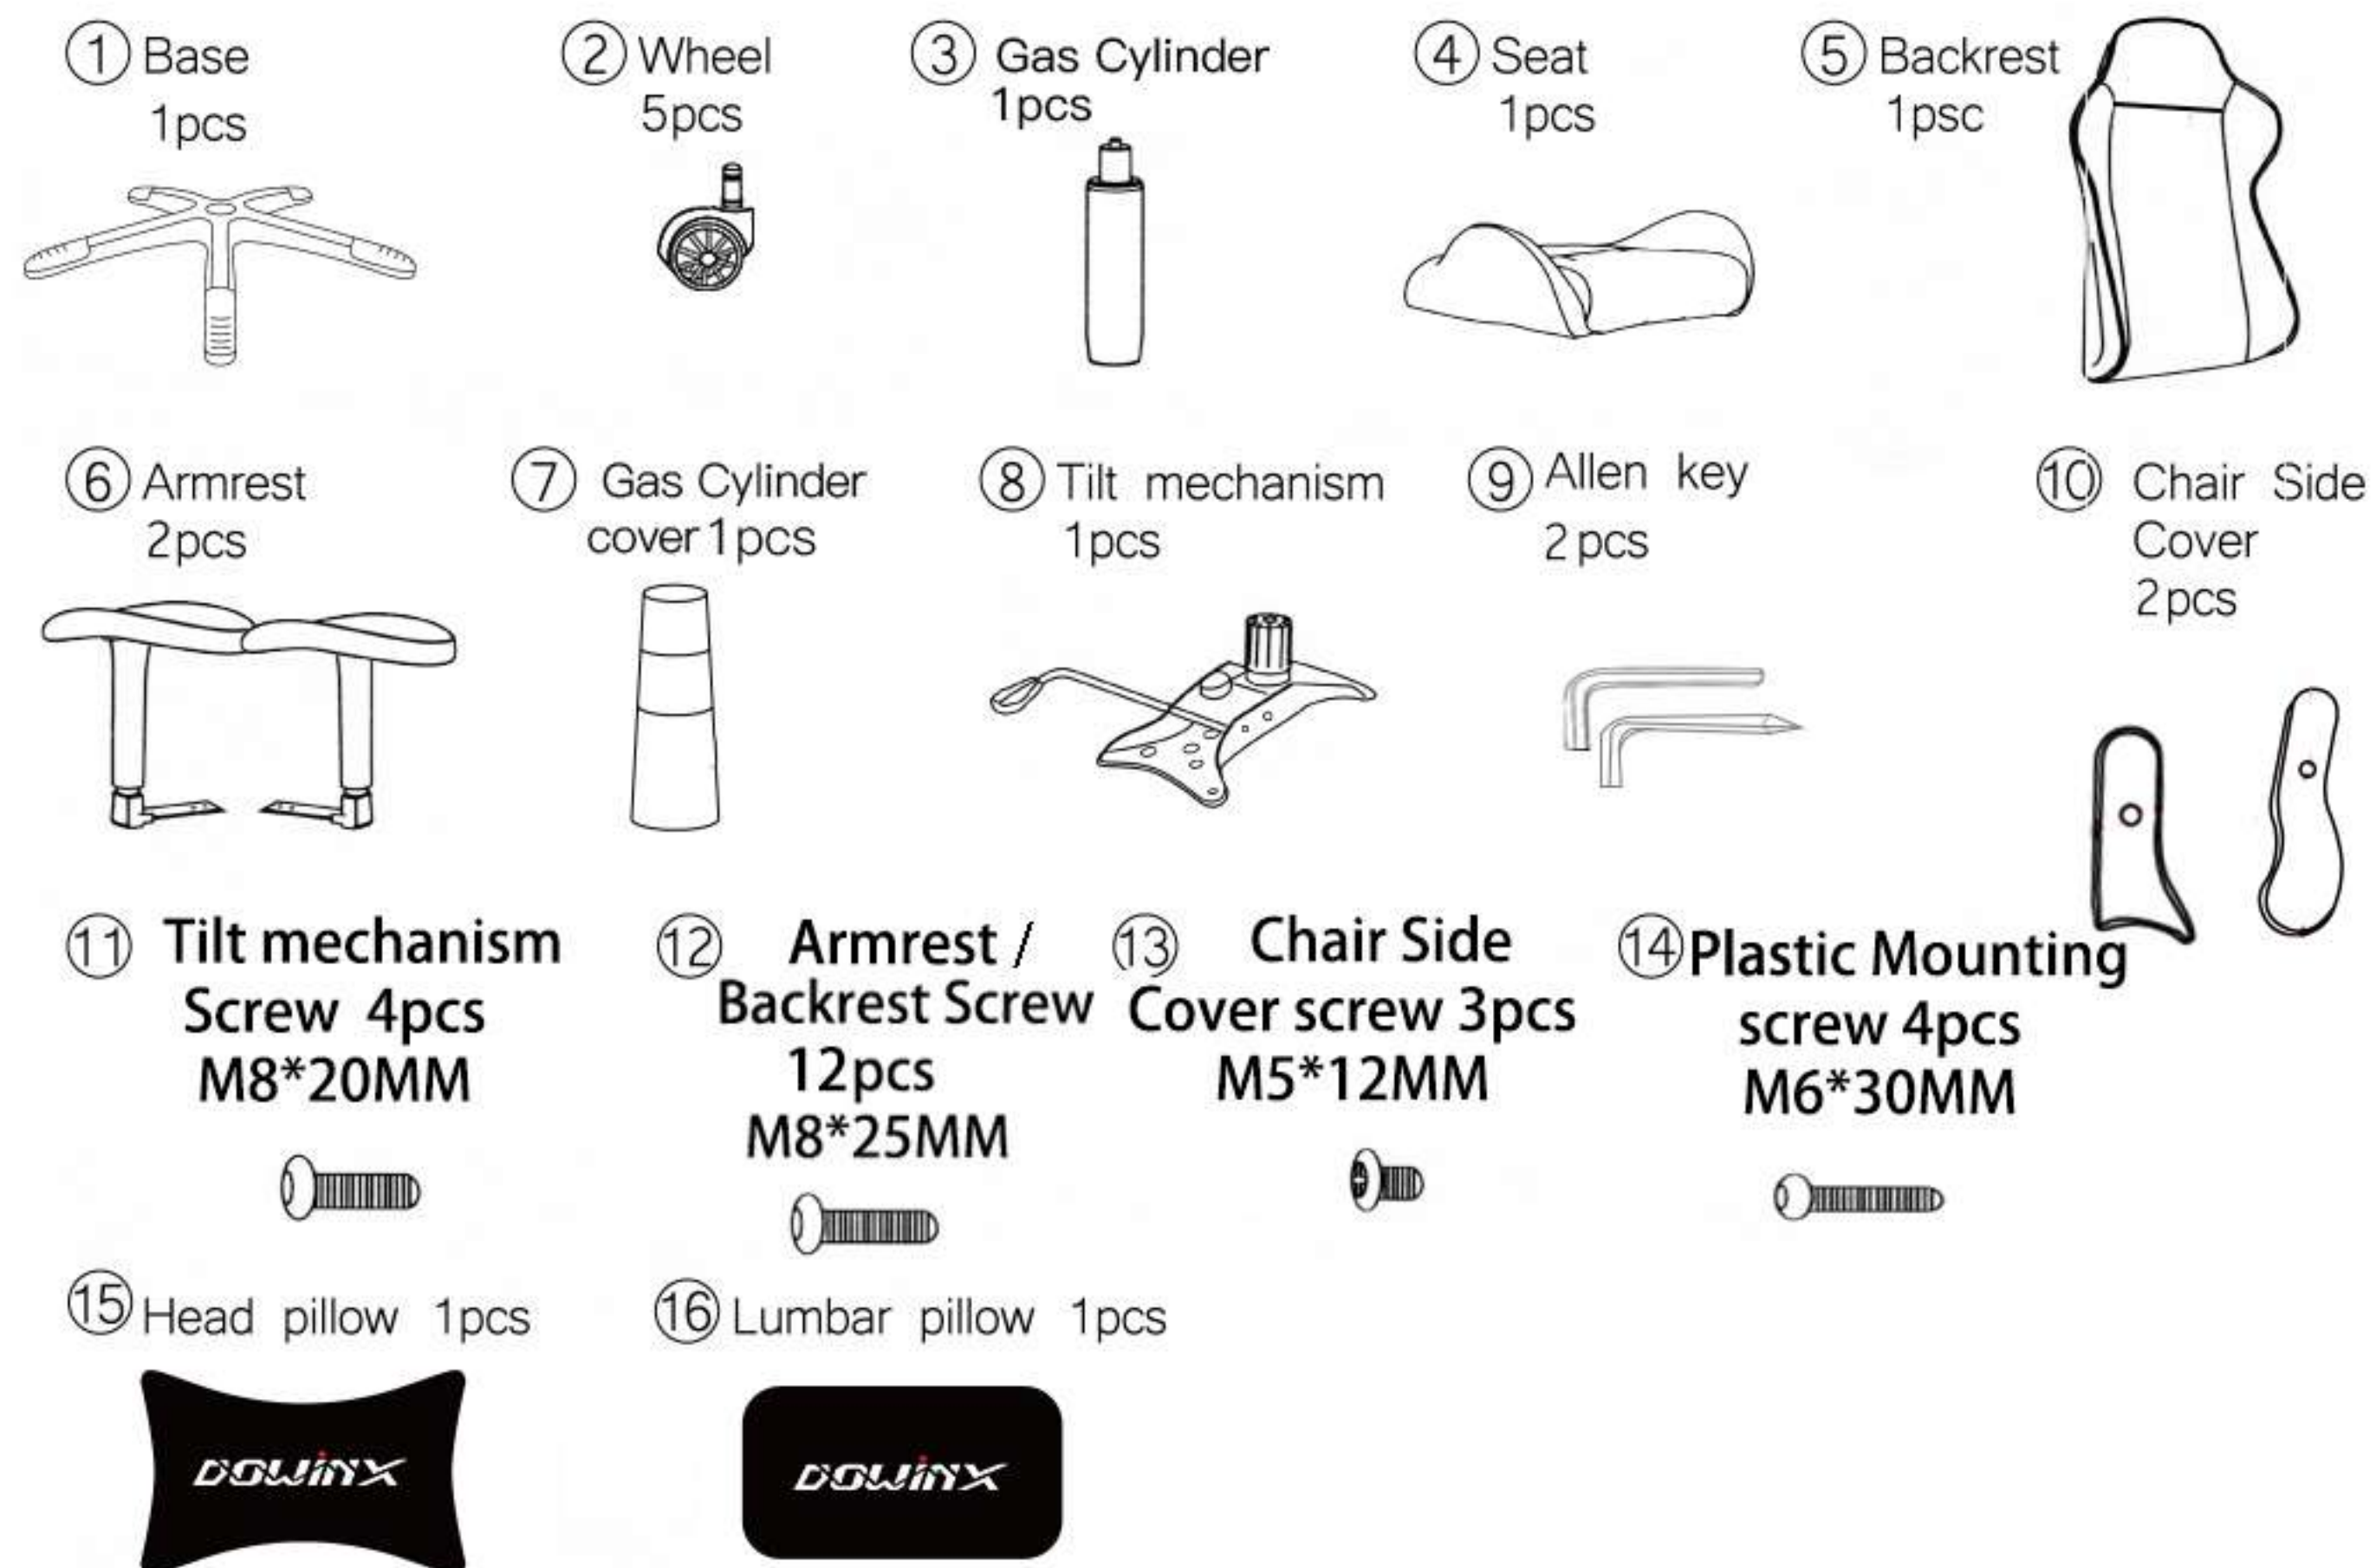


Please make sure the package contains the following items.



※ Actual product may vary from image.

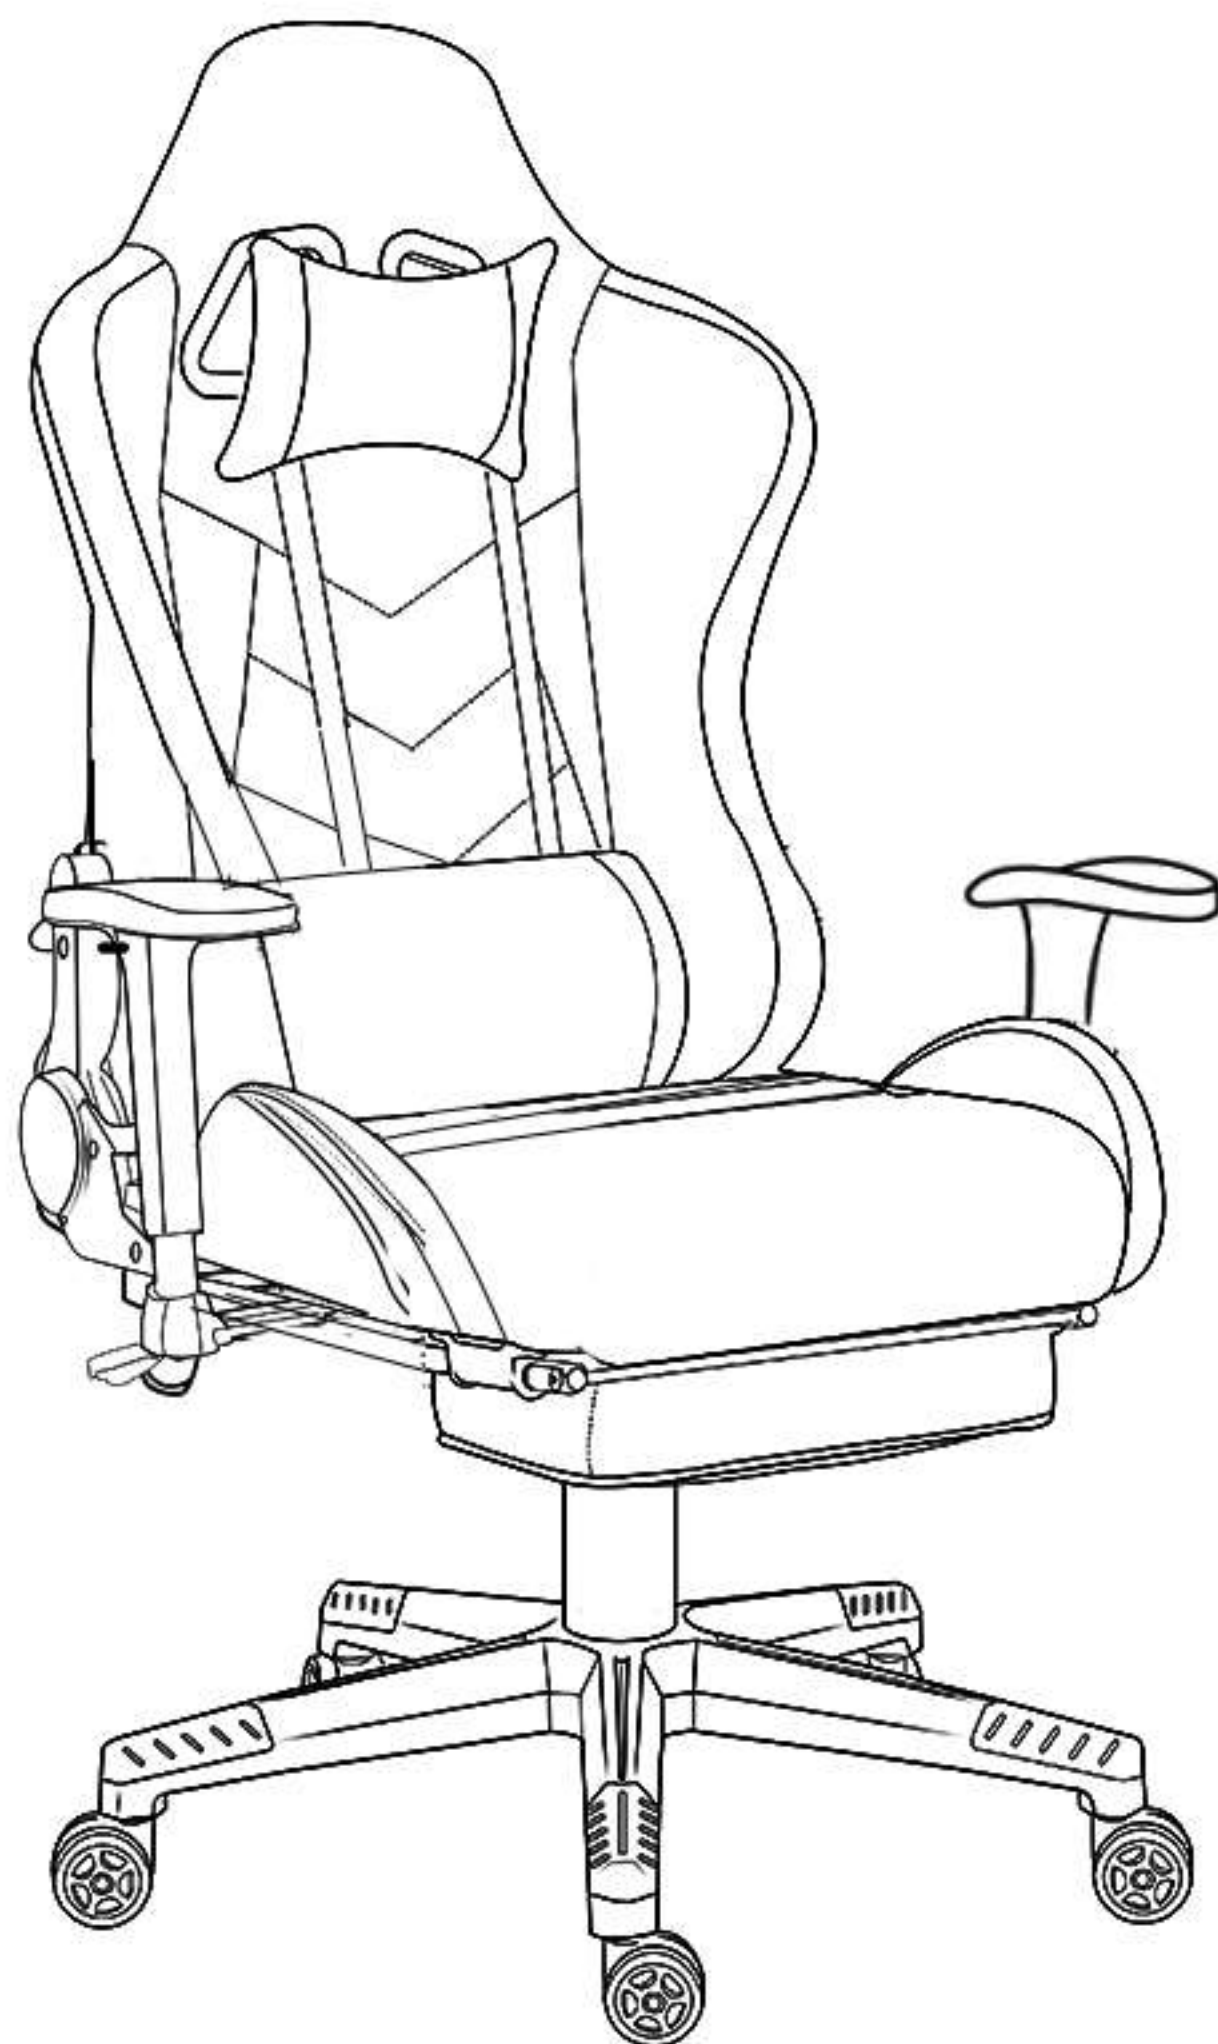

*⑪⑫⑭ has been pre-installed, please check the bottom of the chair

Footrest Components



※ Please make sure the footrest package contains the following items.

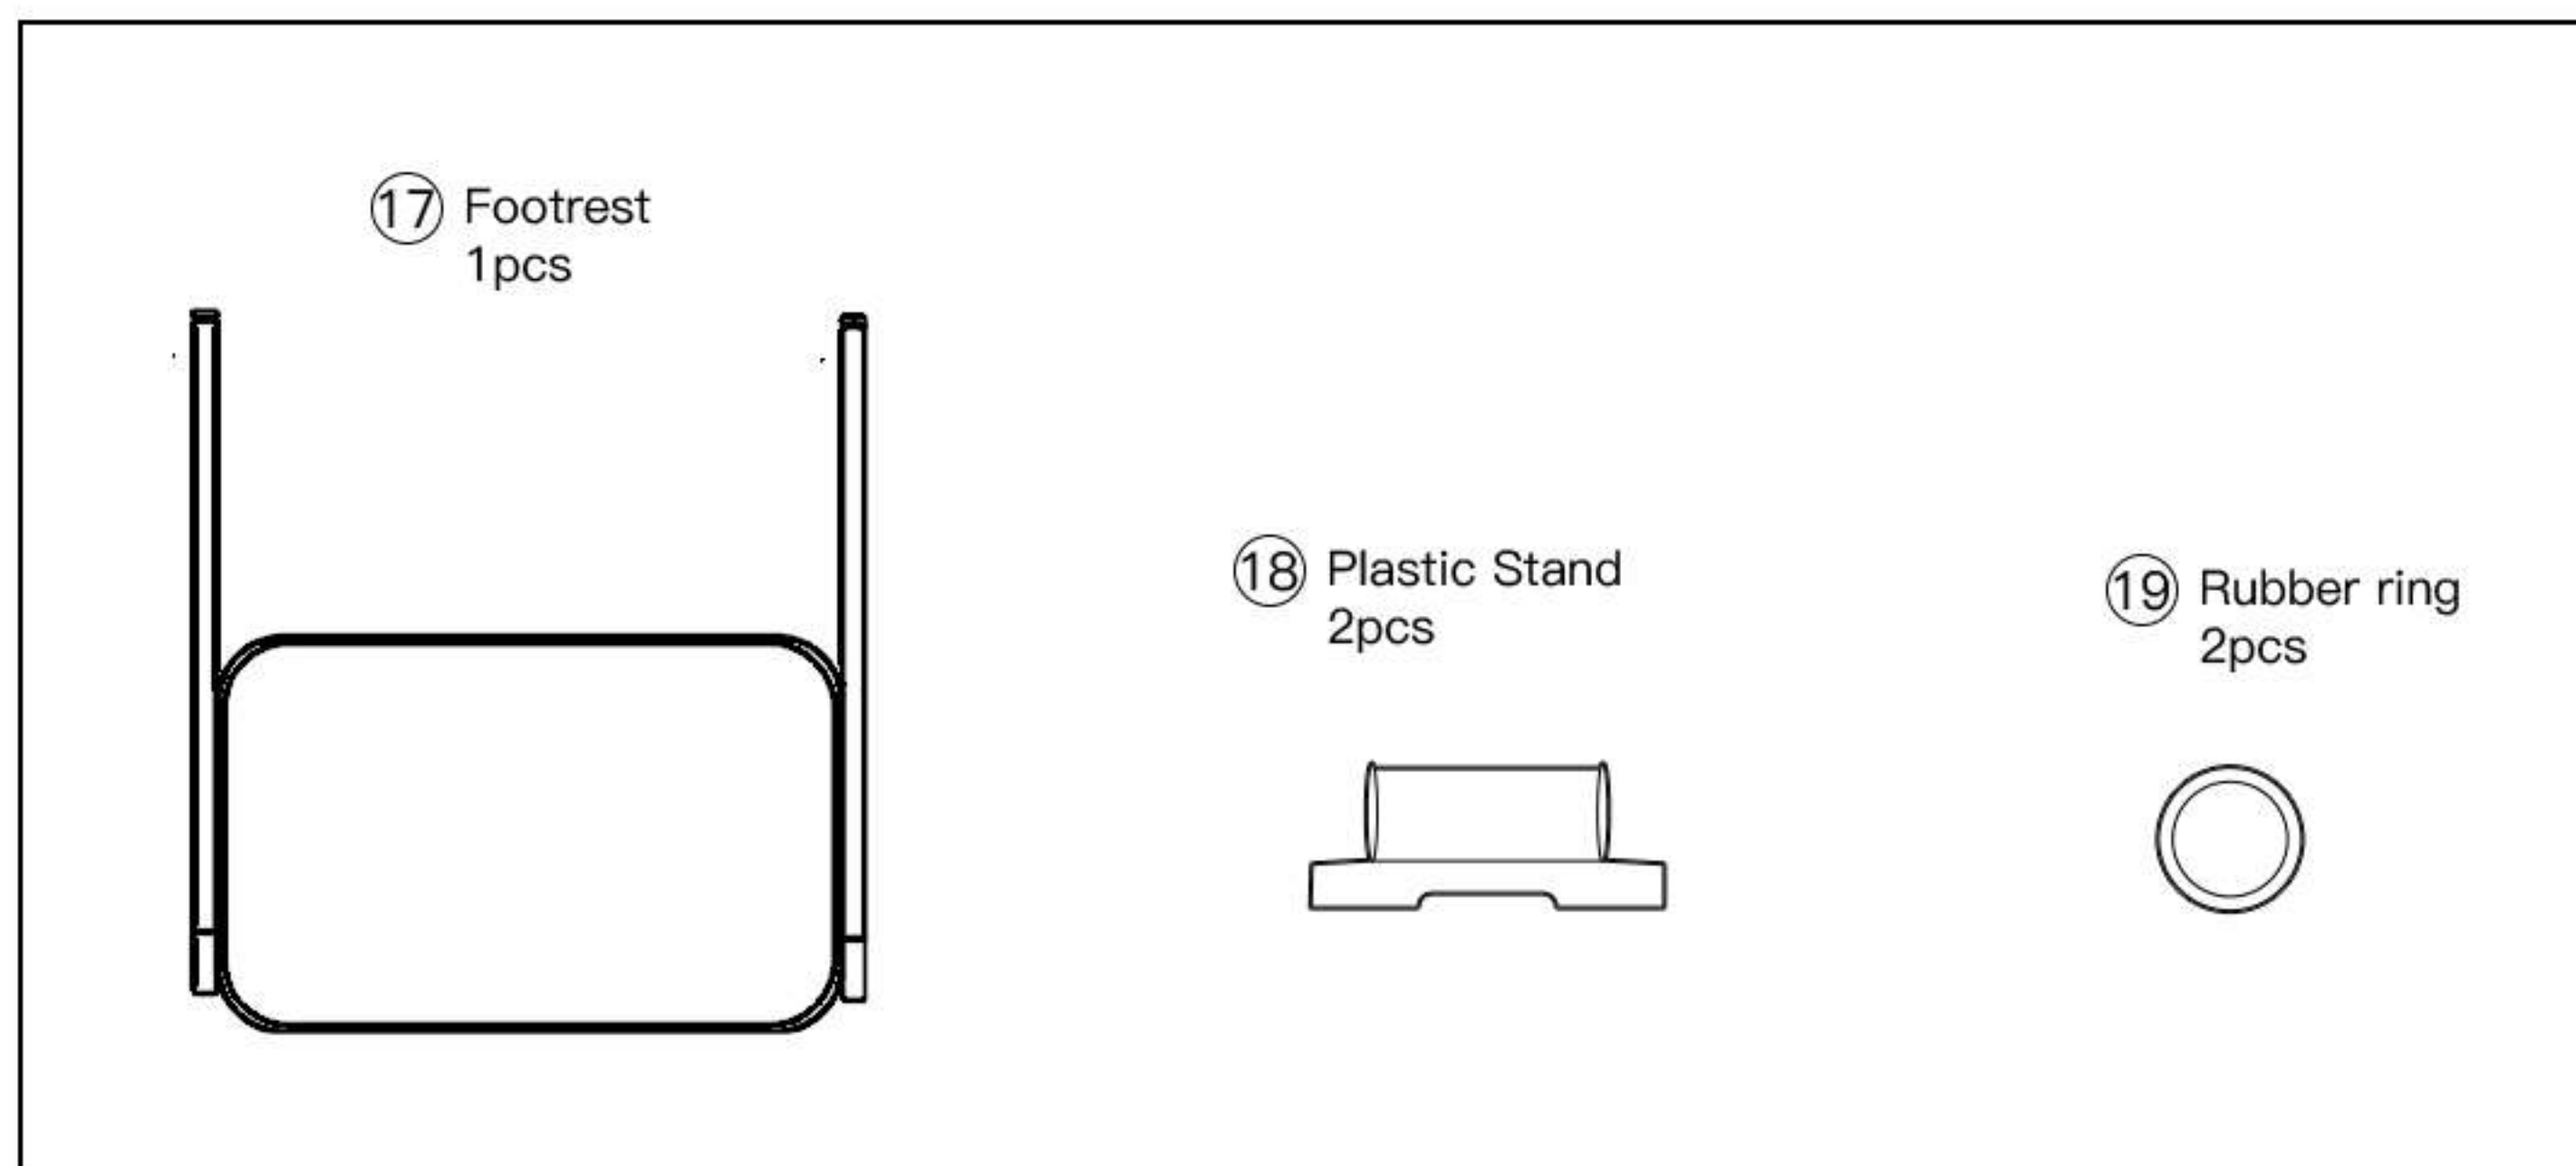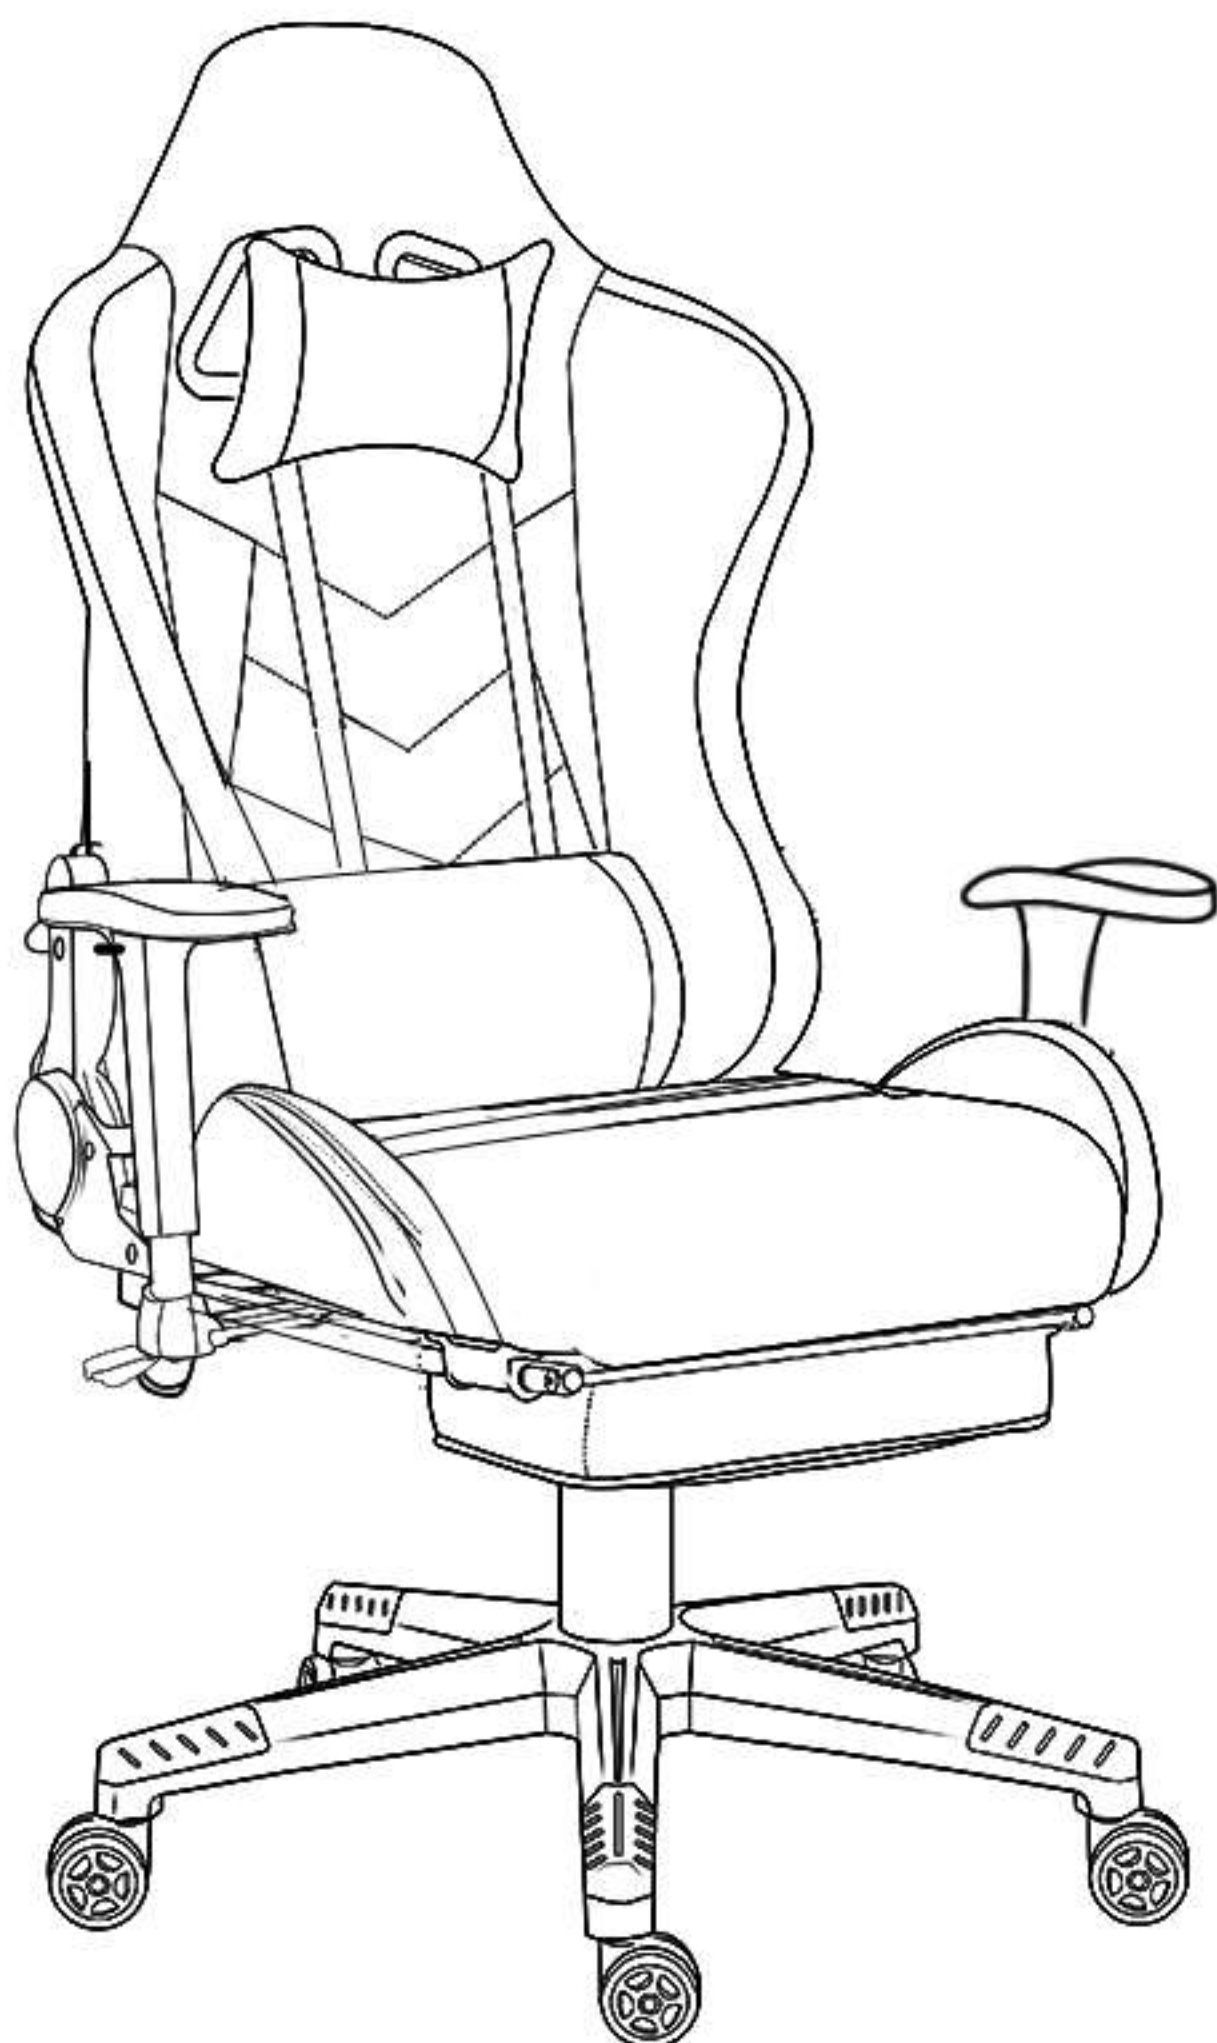

Please Notice:


1. Do not stand on the chair as a step stool or ladder.
2. Do not use the chair unless all screws and parts are tight.
3. Be careful, some of the parts are heavy and sharp.

01 Wheel, Base and Gas Lift Installation

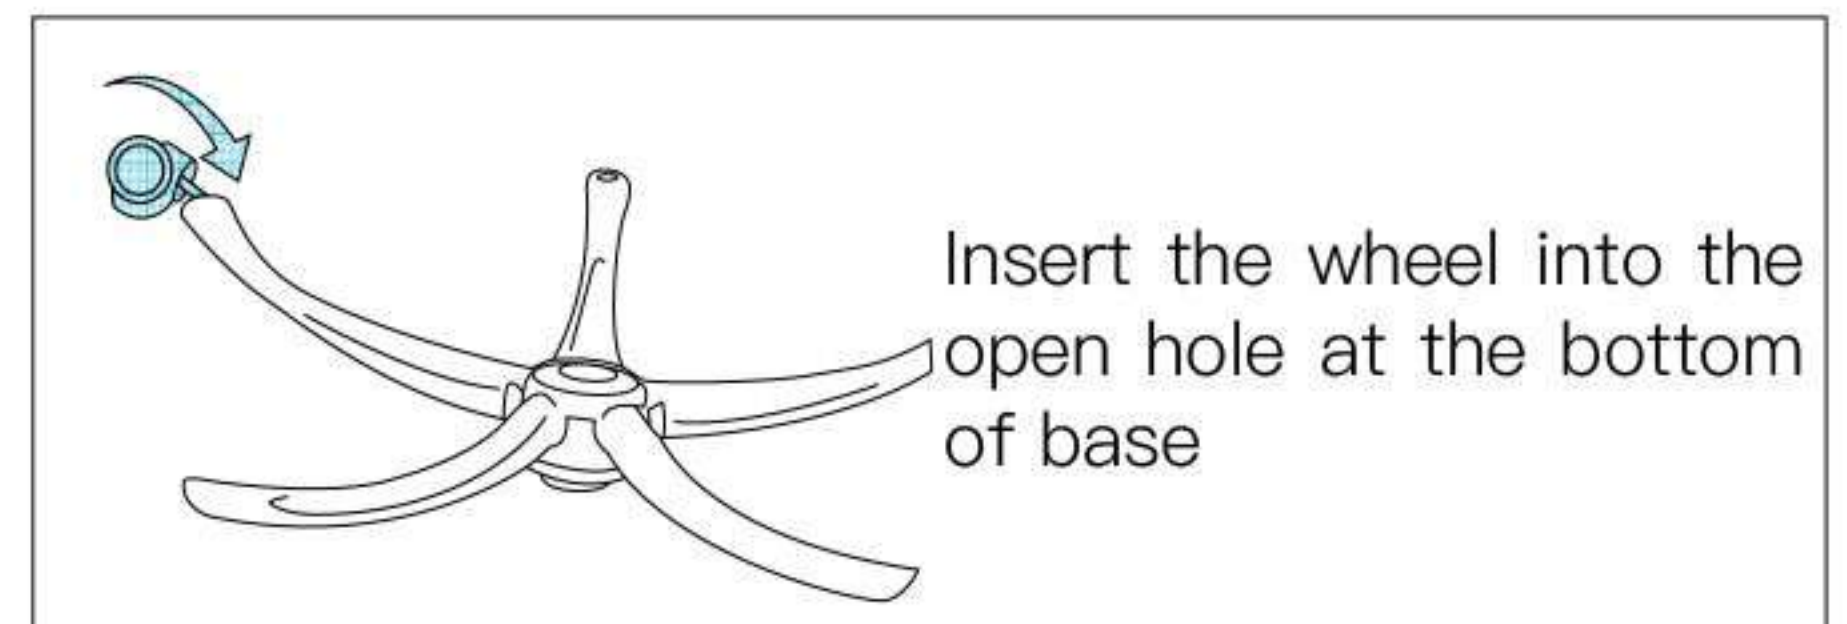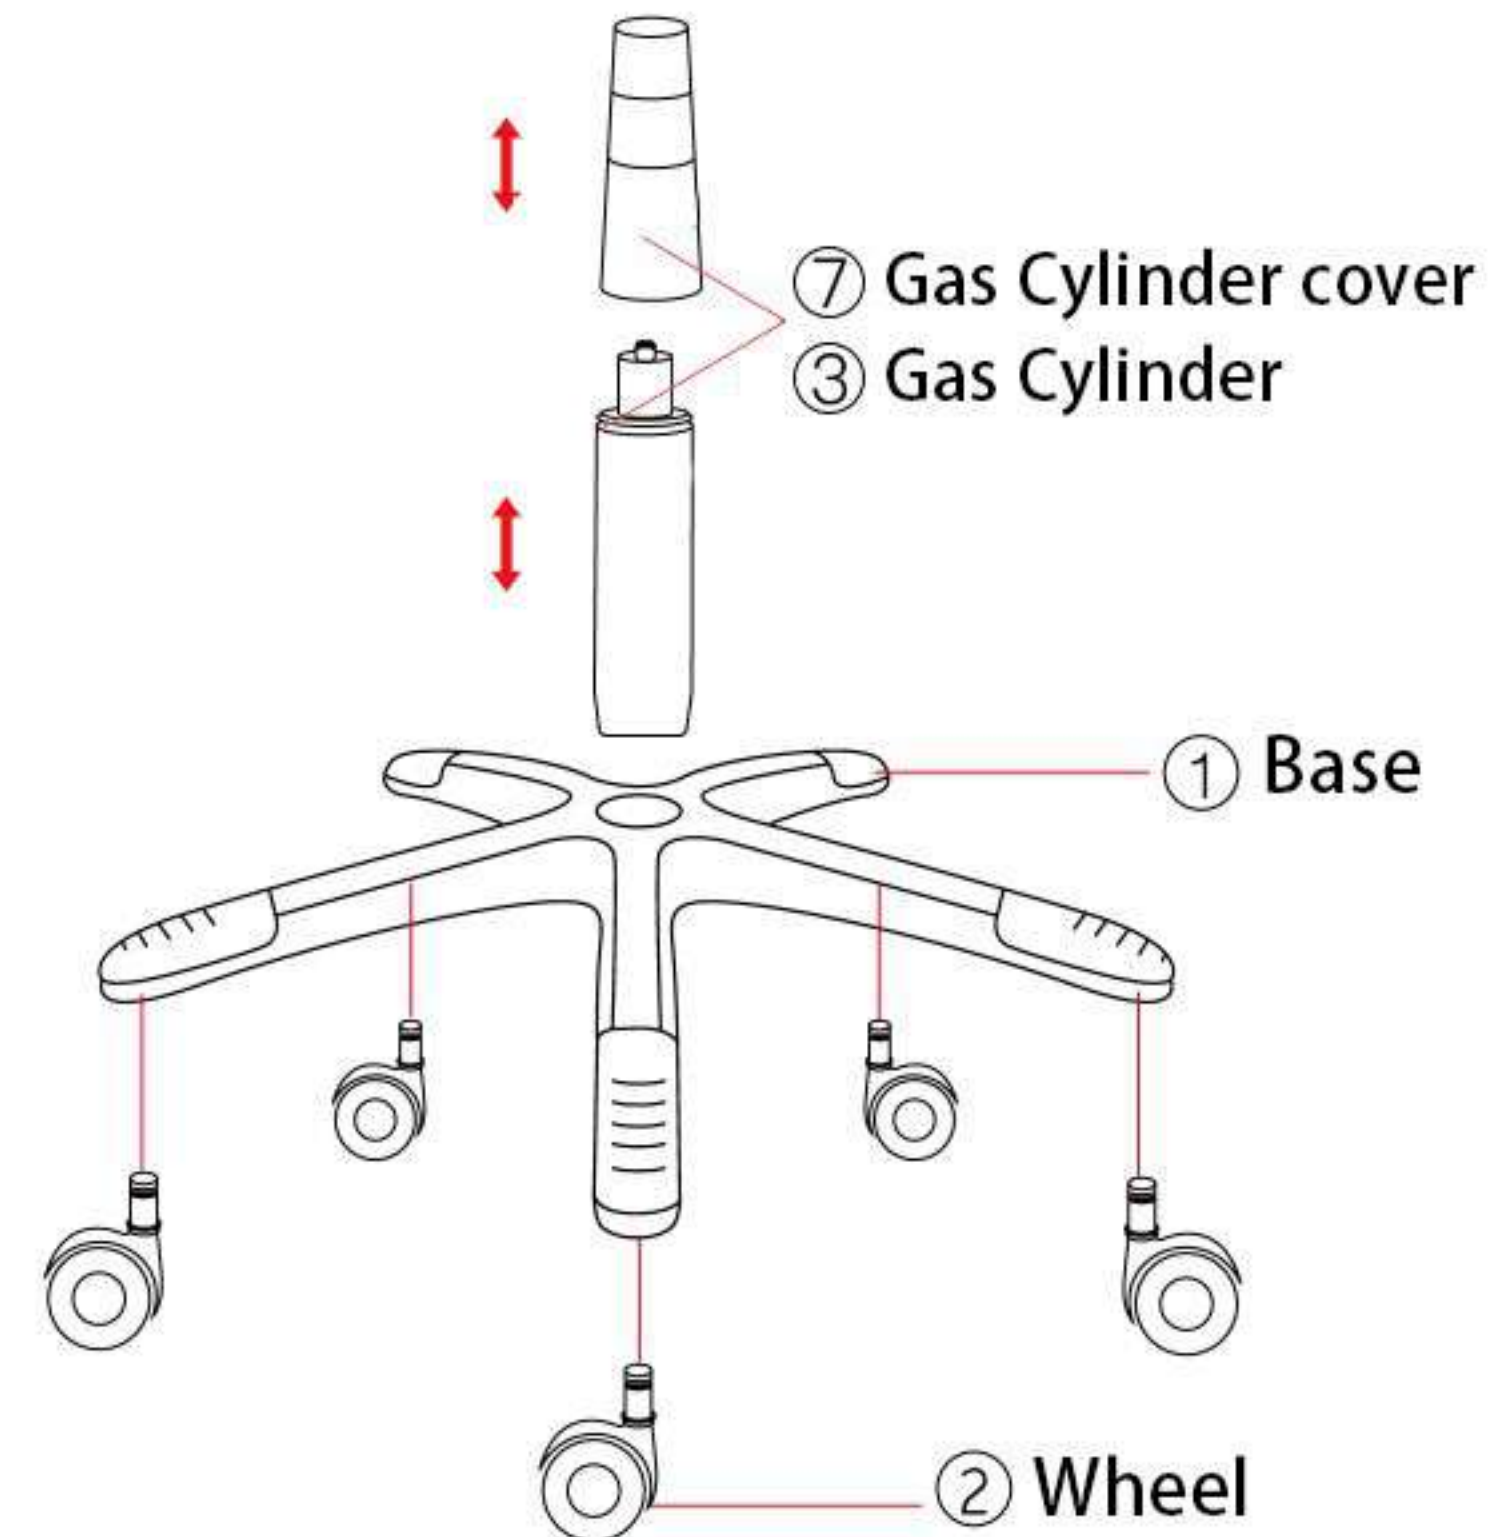

02


Connecting armrest to
the seat

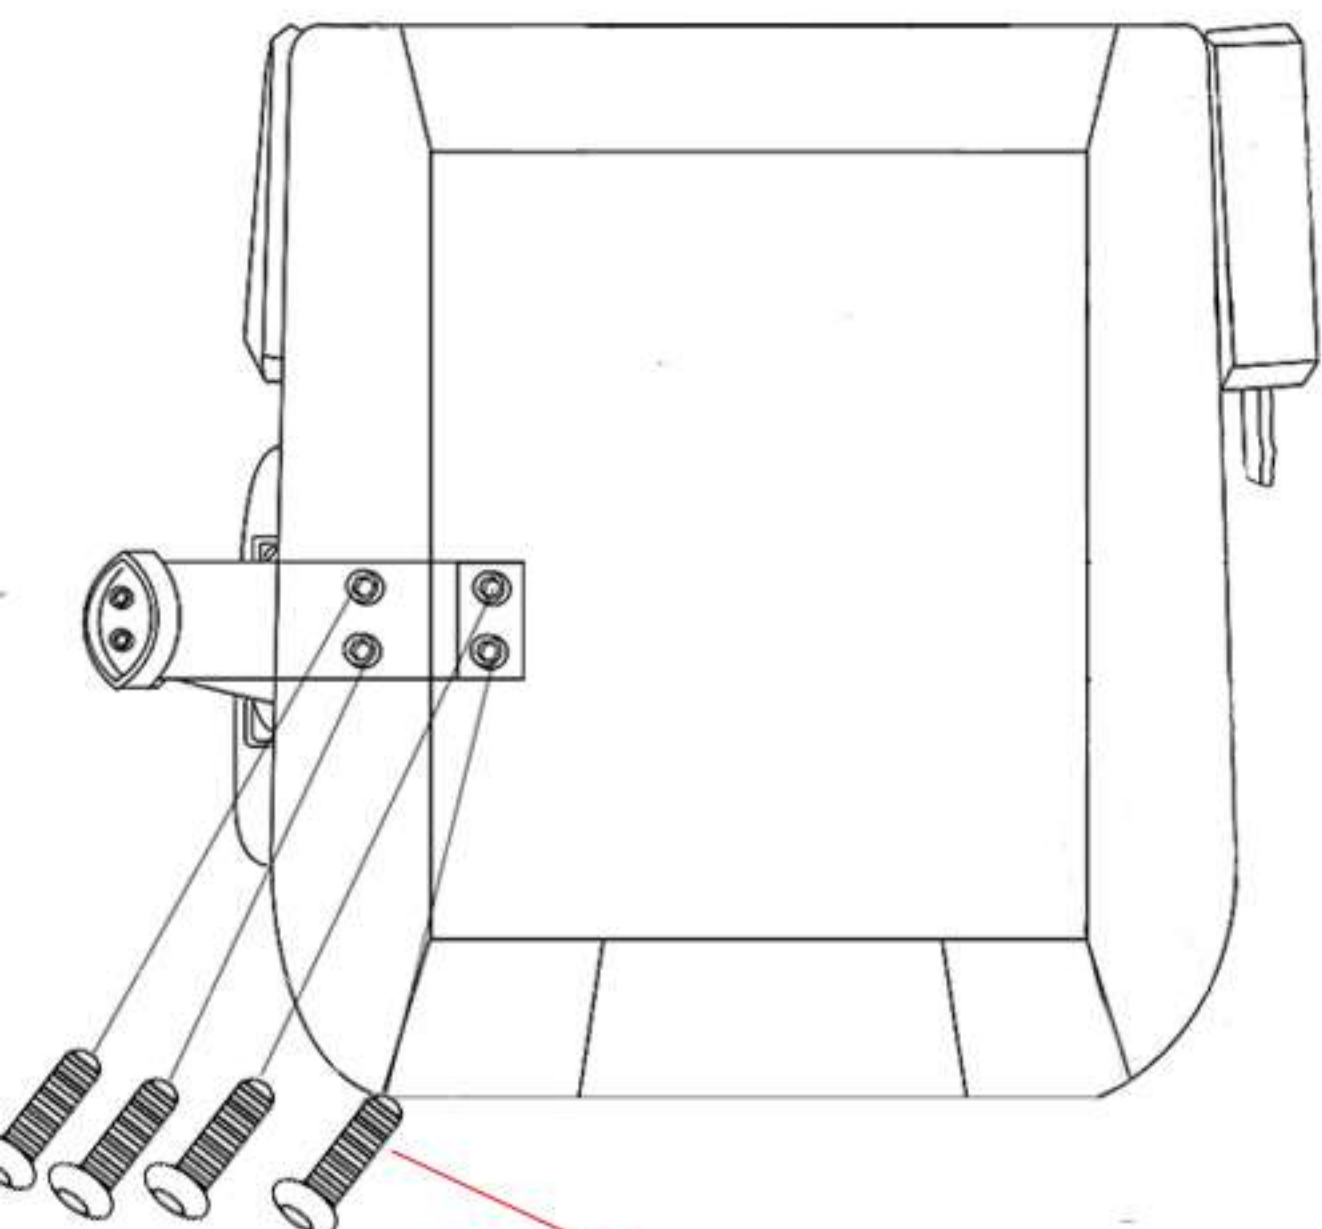Behind**Front**

* Screws have been assembled on
the seat bottom, please loosen them
for further assembly.*


03

Connecting armrest to
the seat

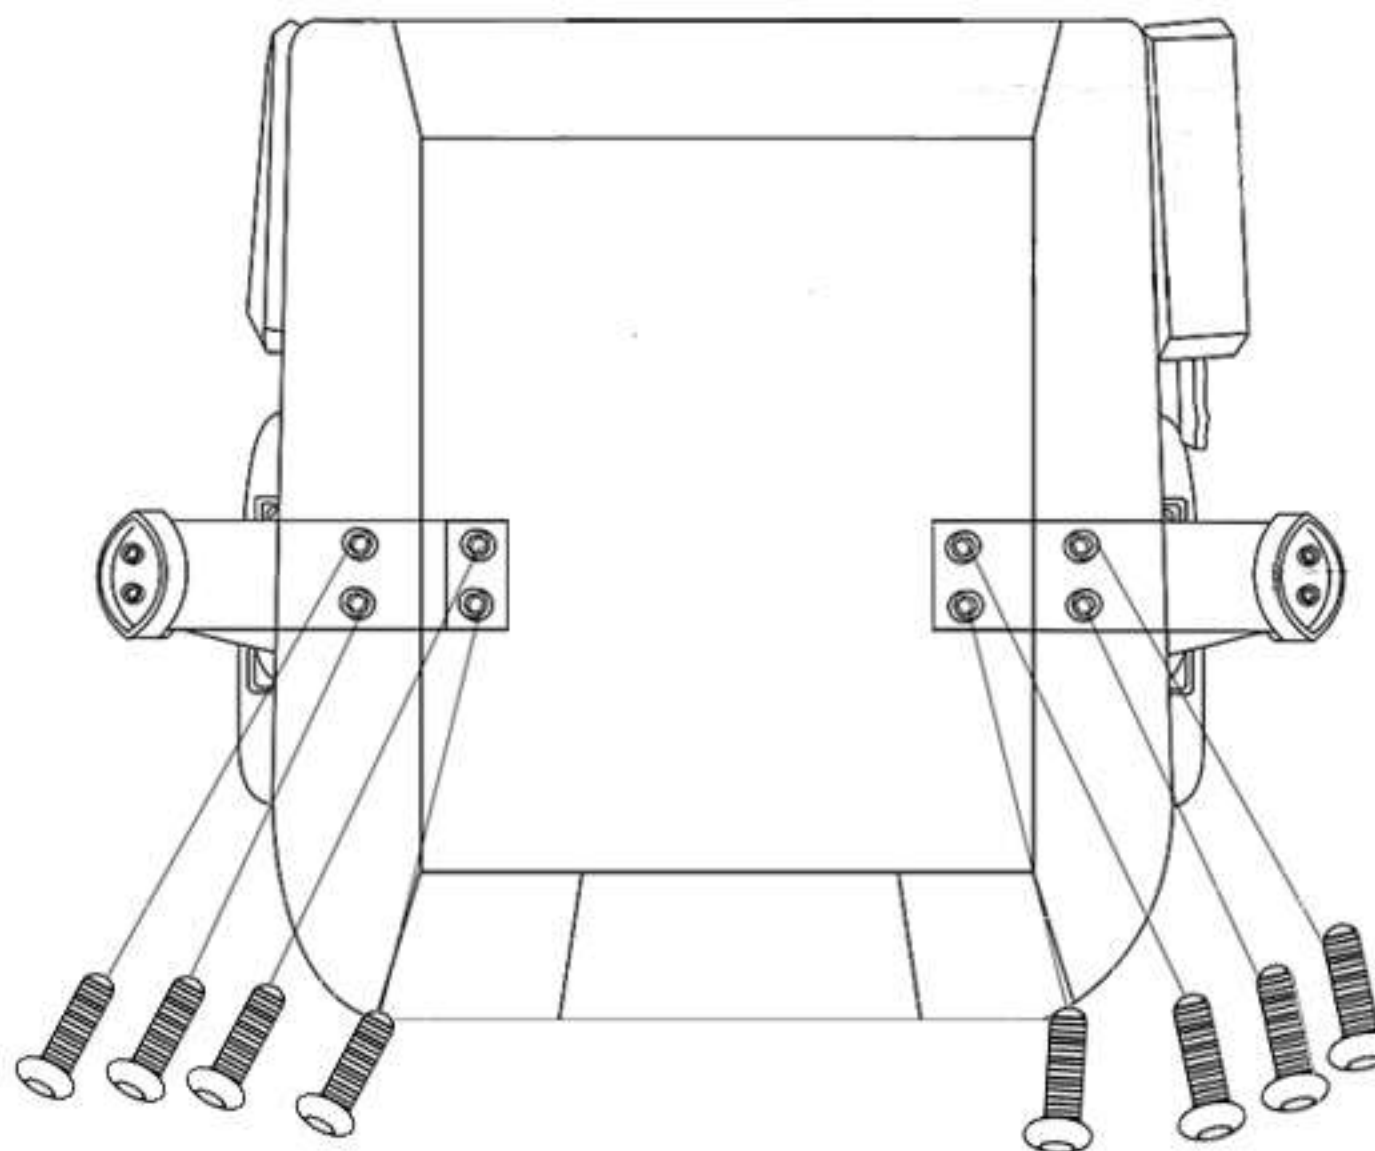


04

Connecting tilt mechanism
to the seat

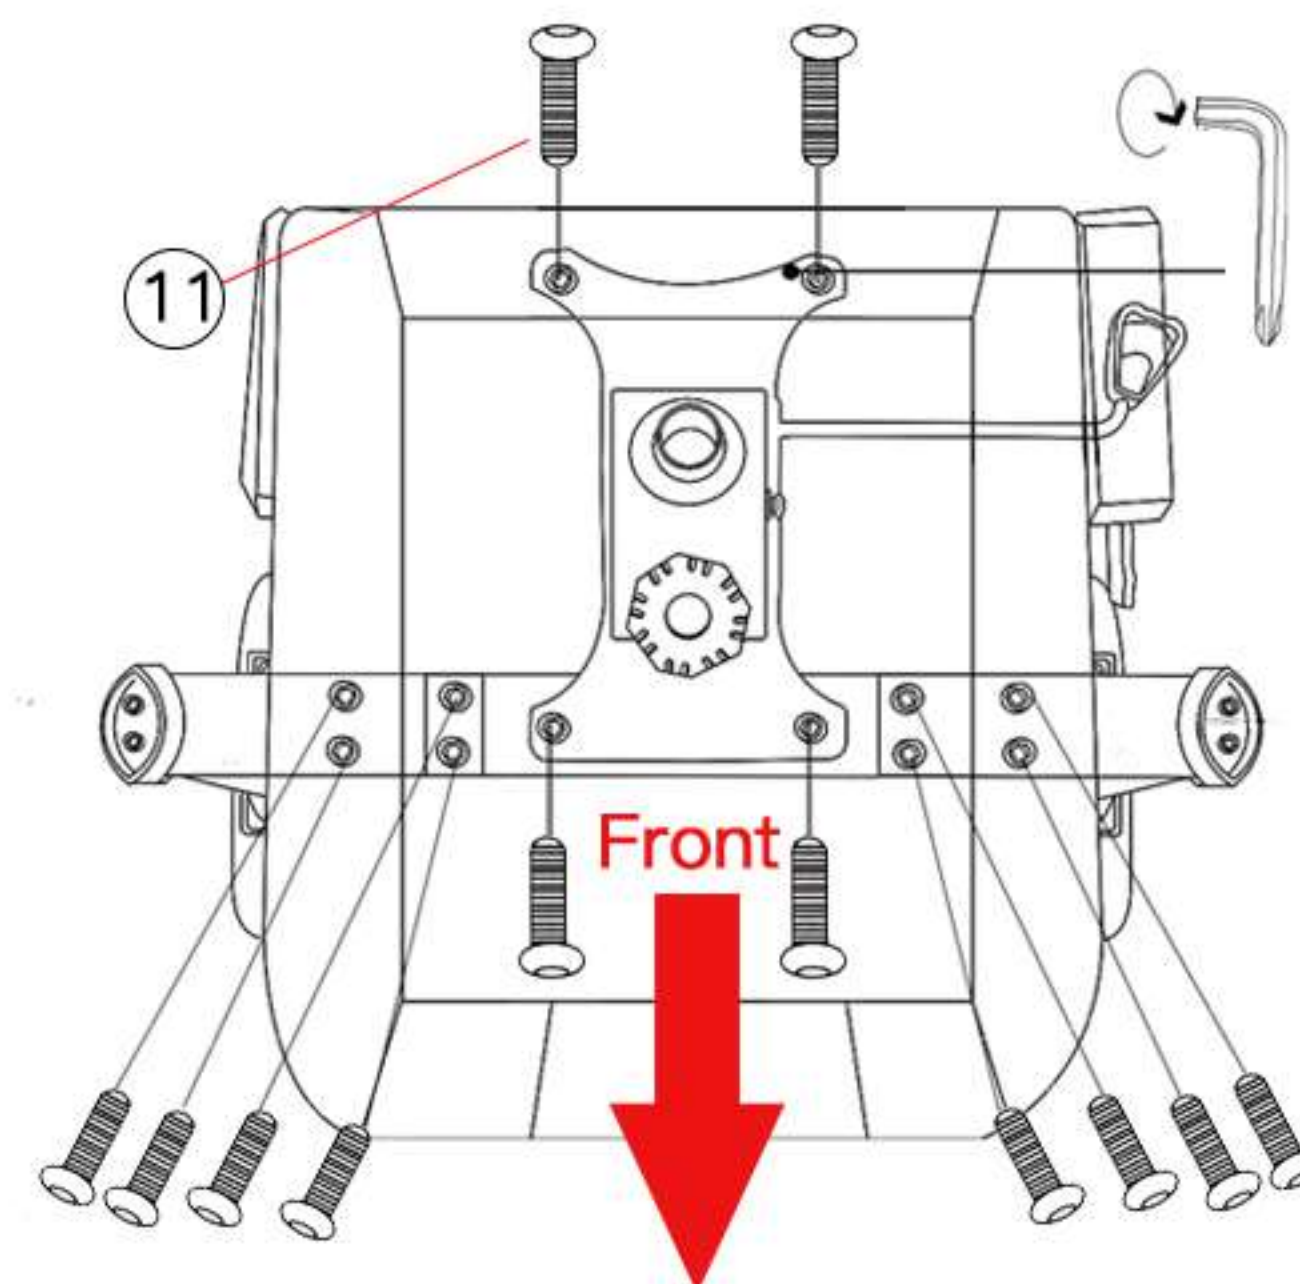


* Tilt mechanism assembly sequence
Please pay attention to the direction *

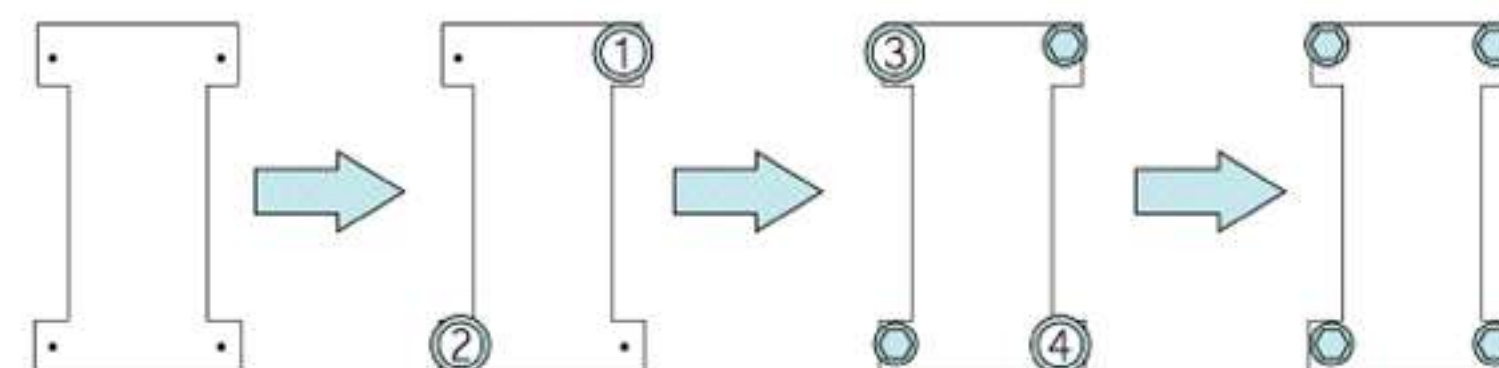

05


Connecting footrest with accessories to seat bottom

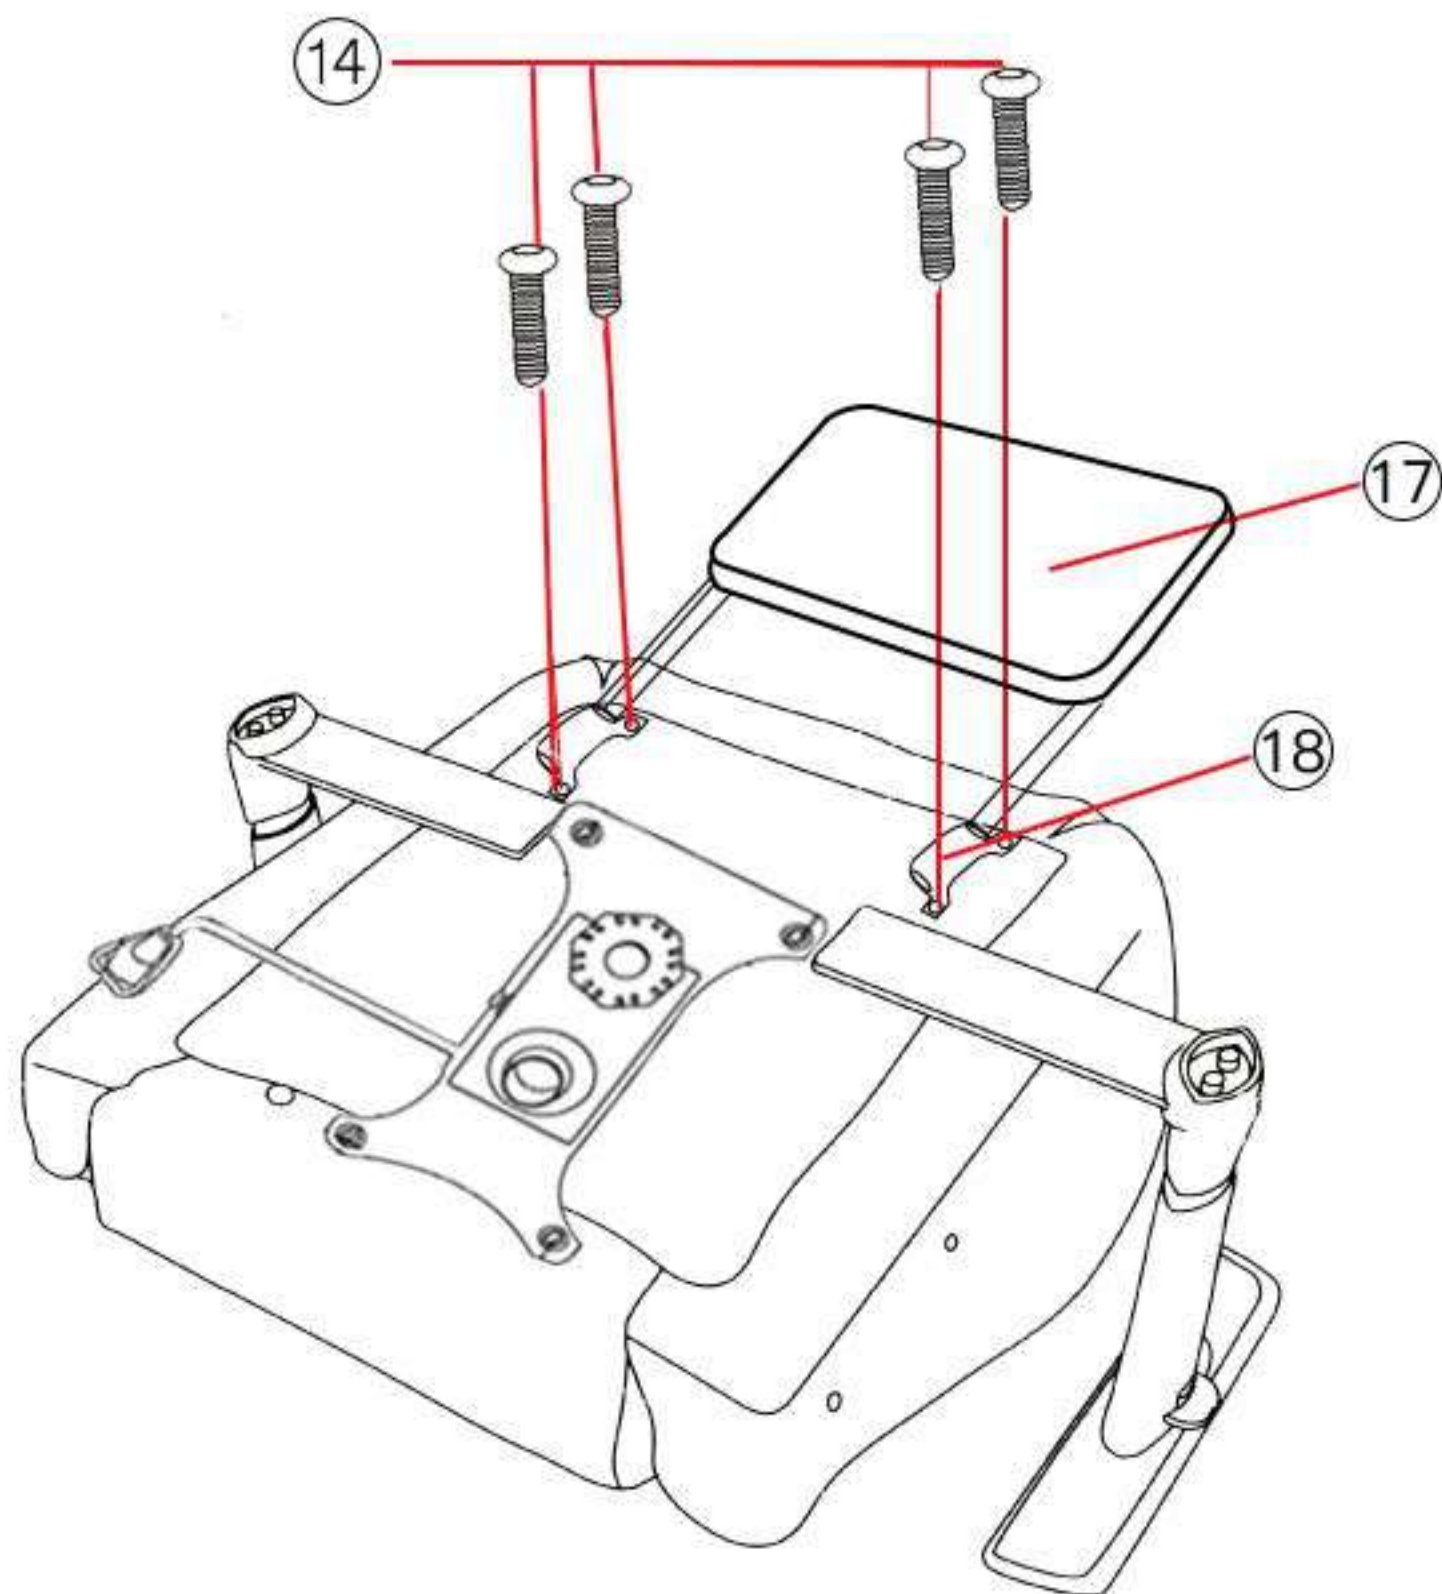

* ⑭ Screws have been assembled on the seat, please loosen them for further assembly.*

06


Connecting footrest to footrest rods

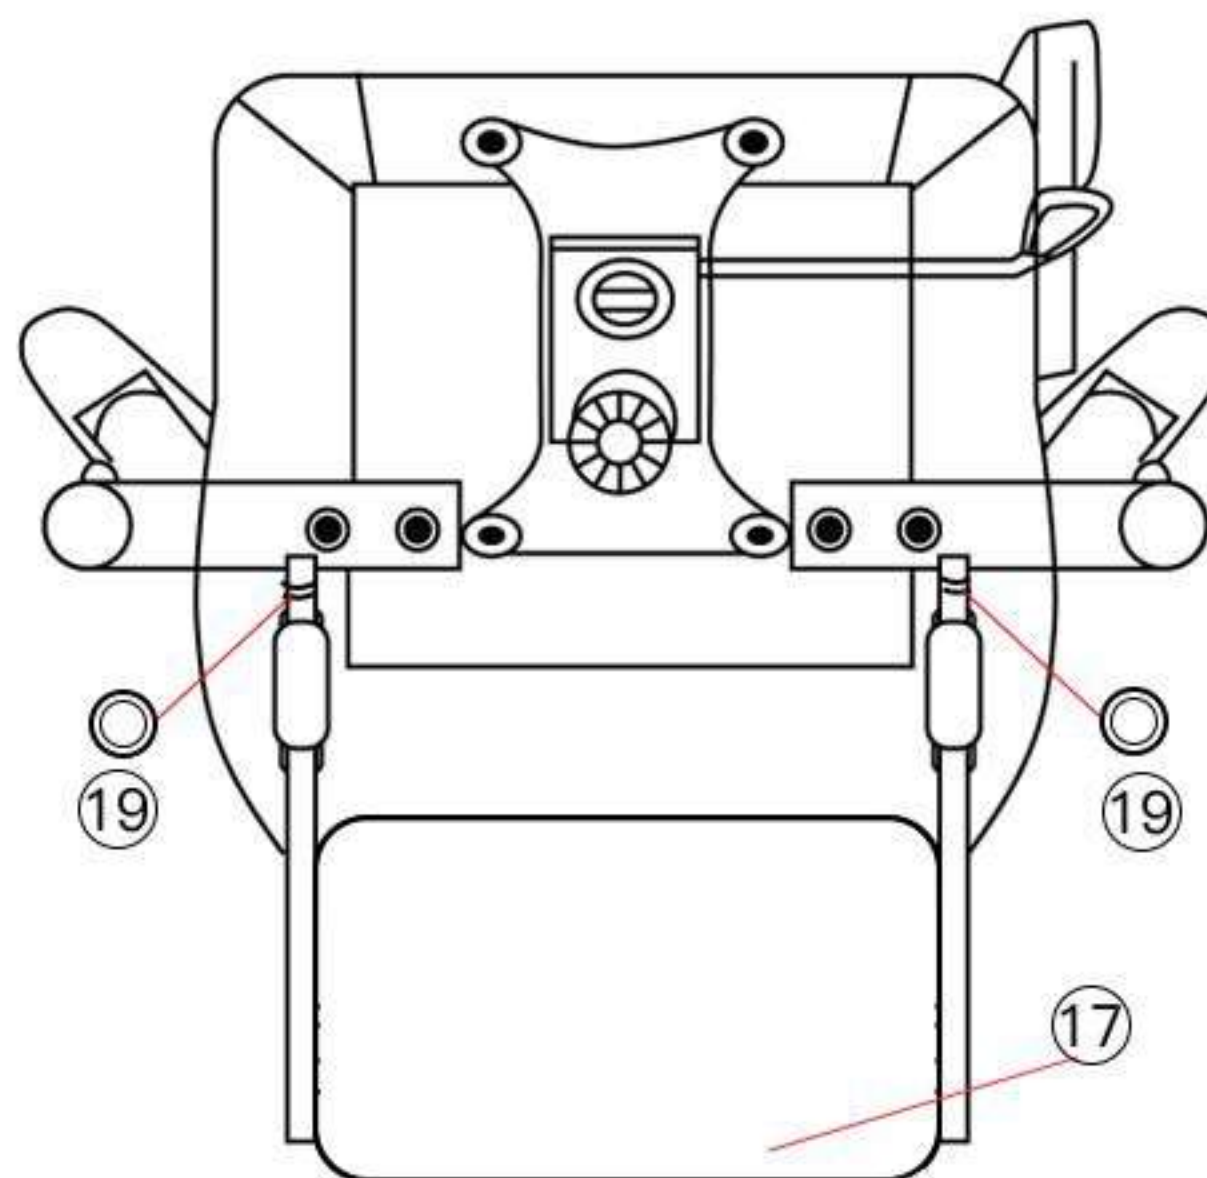

Be careful with the direction of the footrest.


07

Connecting the backrest to the seat Assemble the left side(recliner mechanism)– first

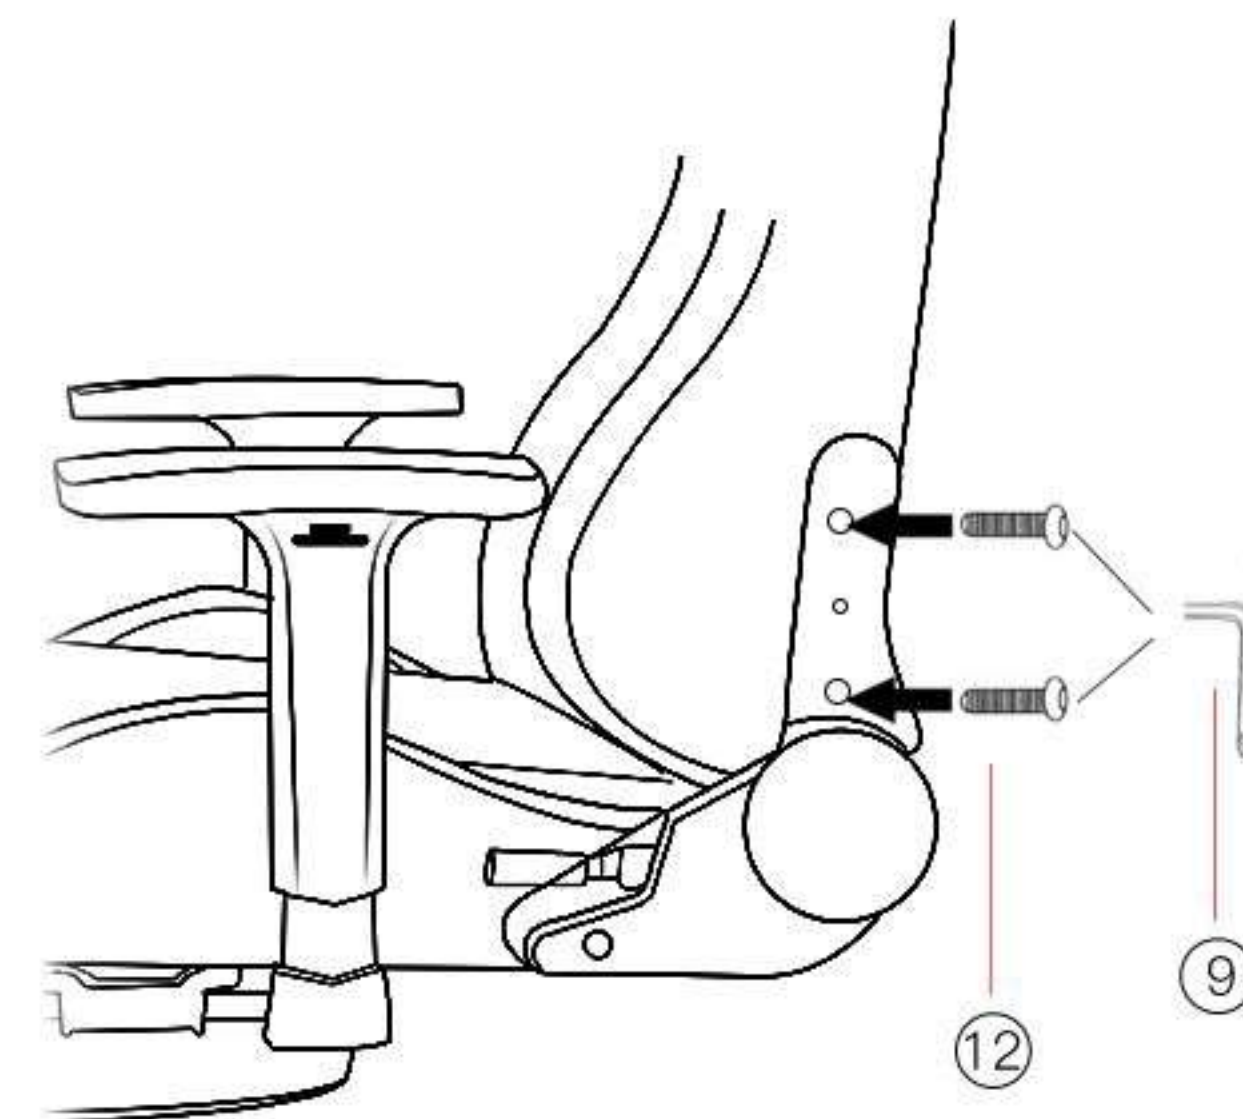


08

Assemble the plastic cover

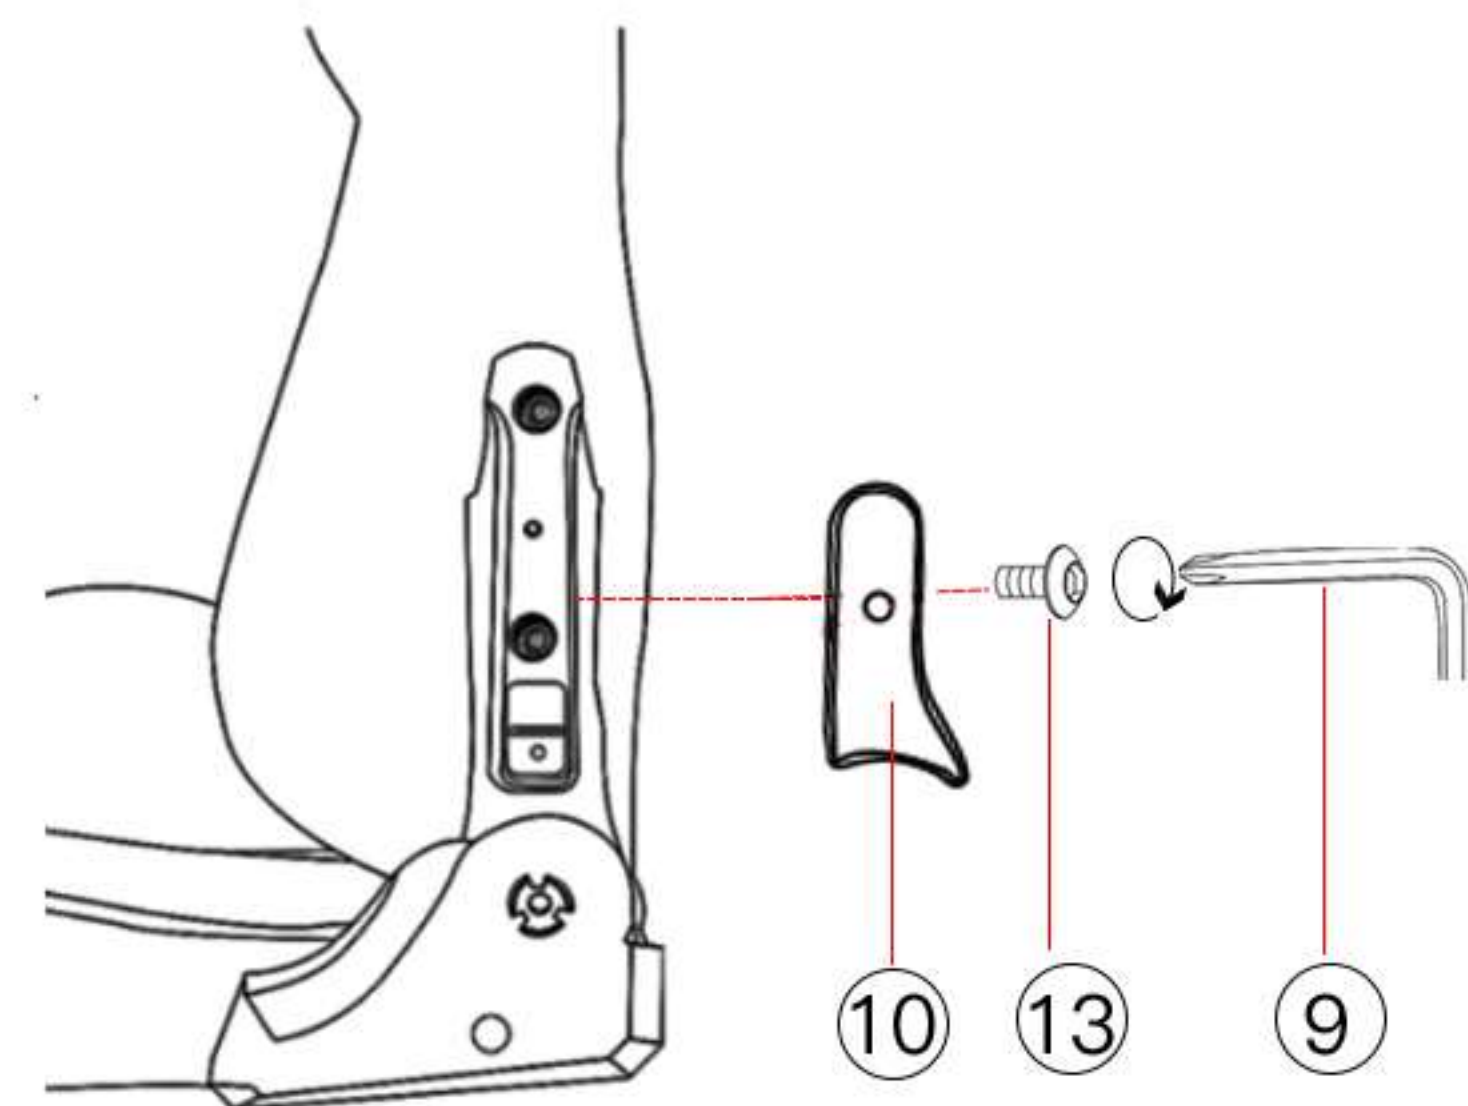


09

Connecting the upper body and—
push it down connected with gas

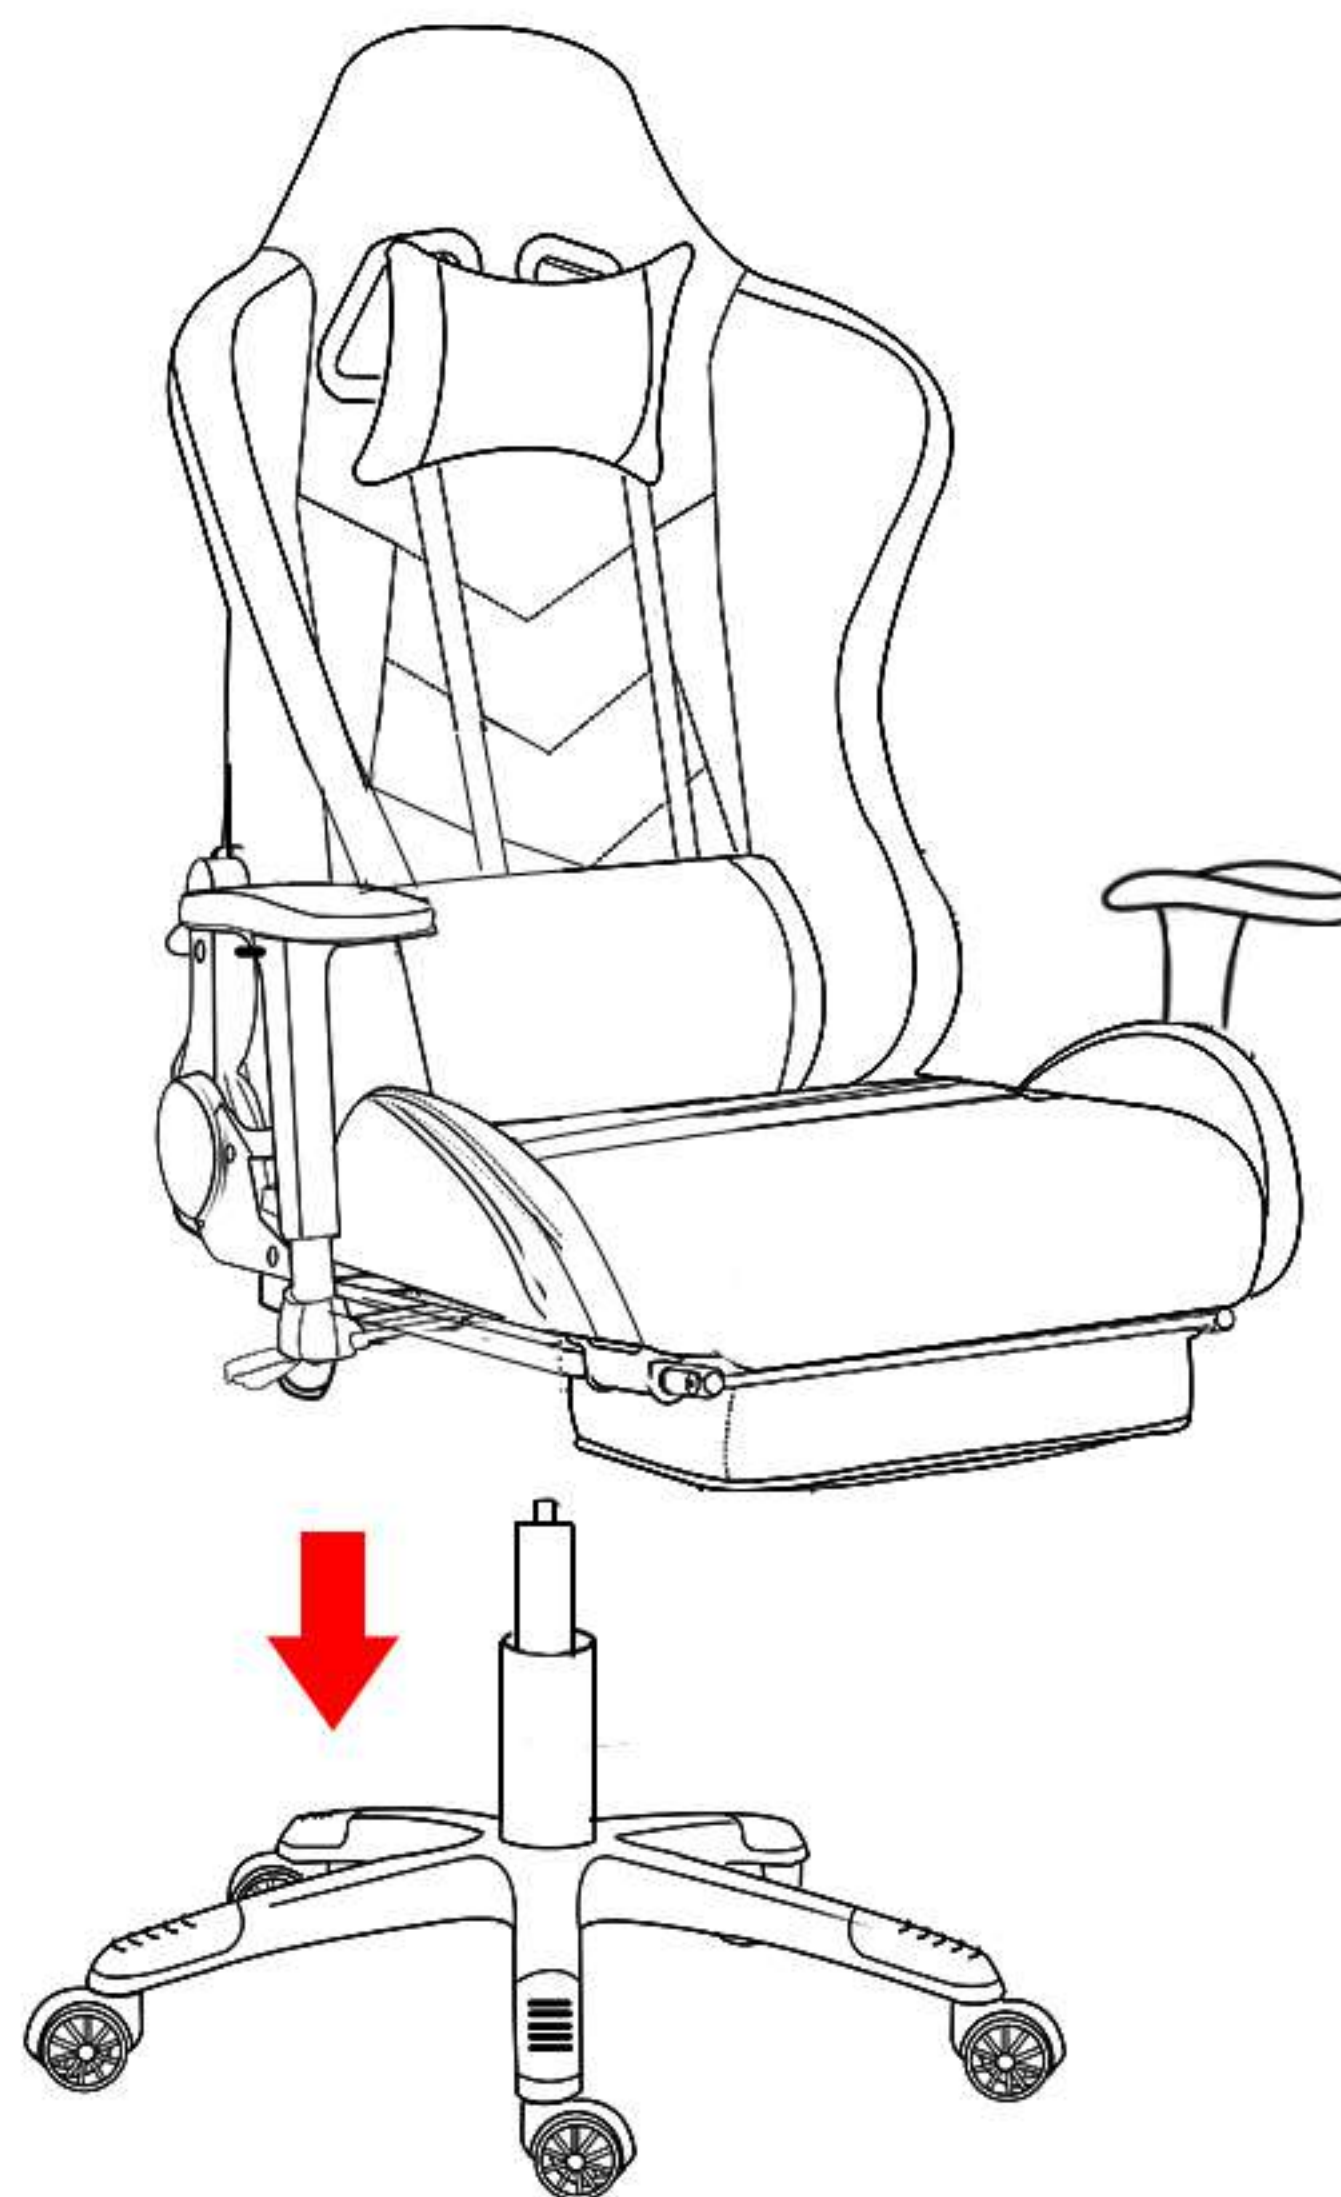


10

Assembly of chair with footrest is
complete

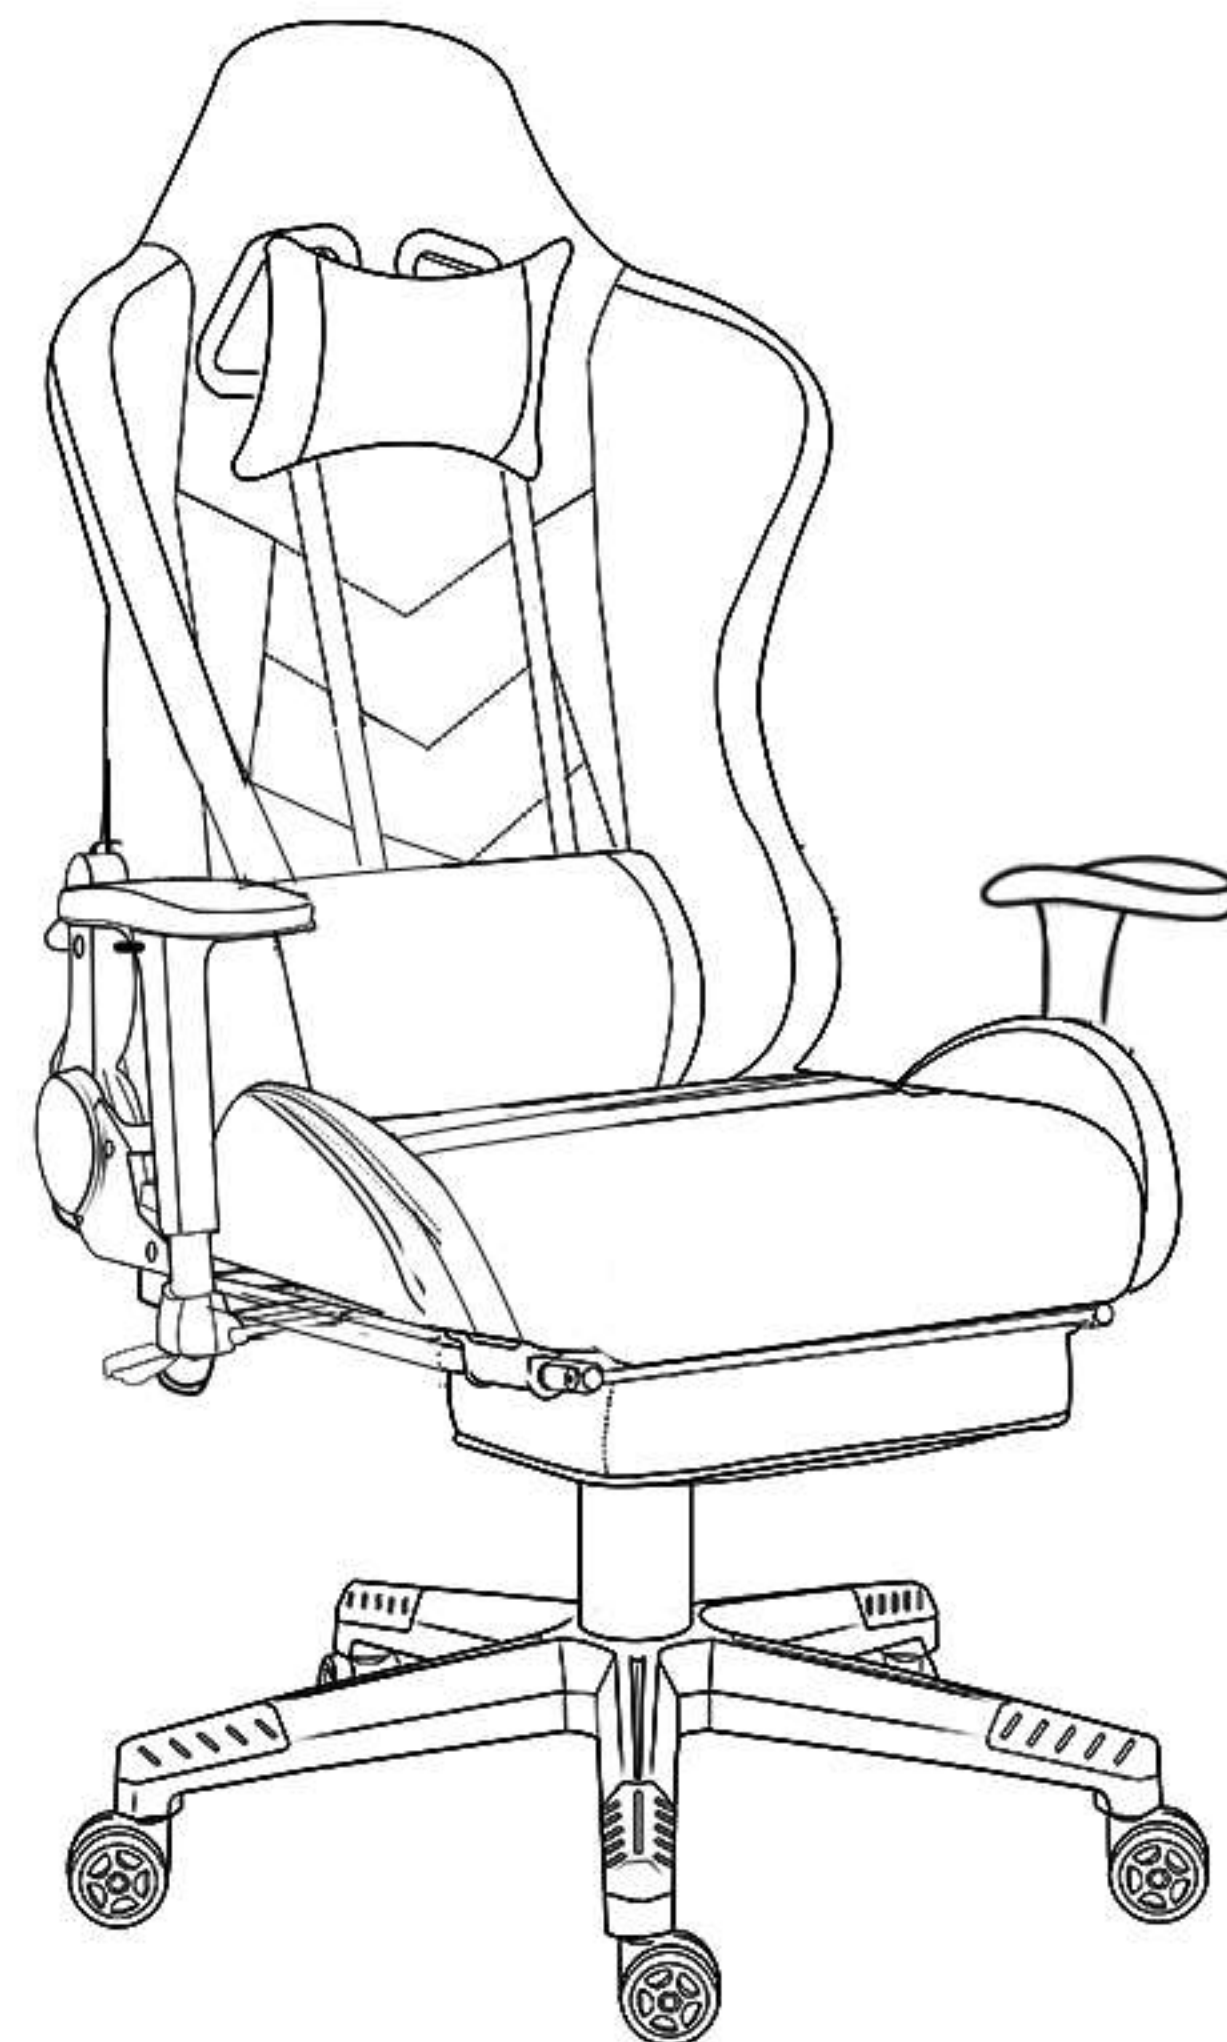


Cautions

Right hand

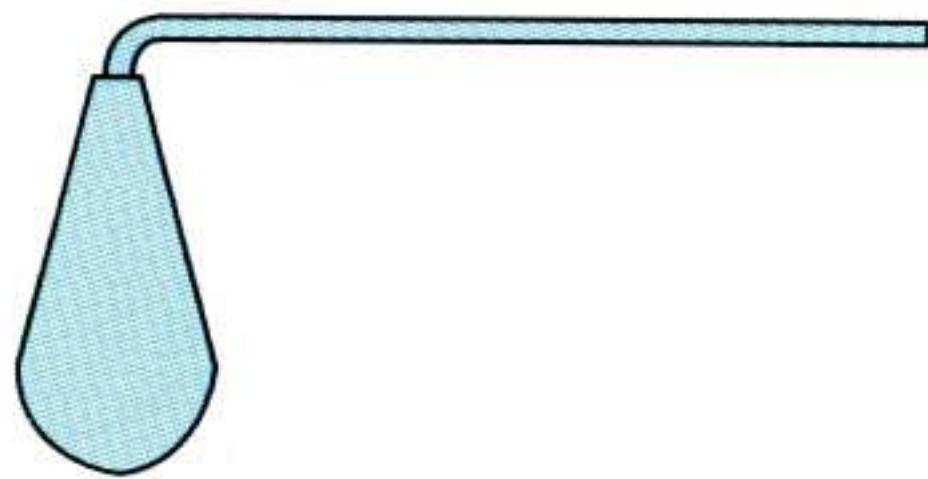

Height handle

Left hand

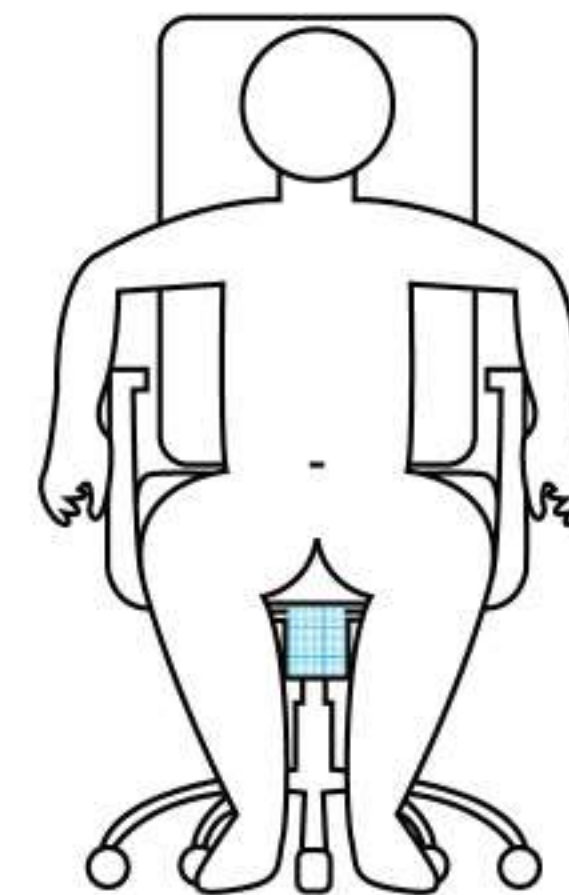


No handle

Tilt Mechanism knob should be located under the front of the seat


Cautions

Rocking

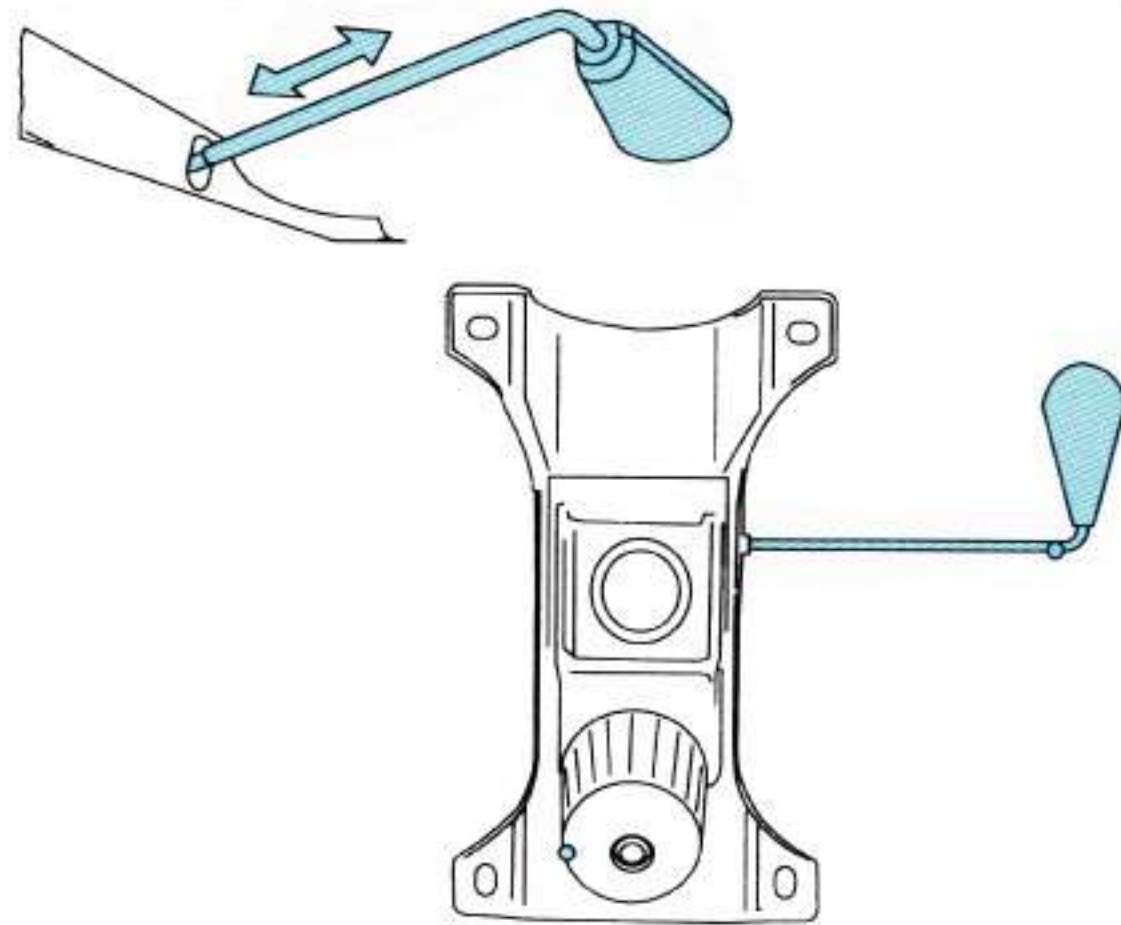

Put out/push in the lever to enable/disable rocking function
Twist the knob to adjust tension of tilting

Recline and Lock

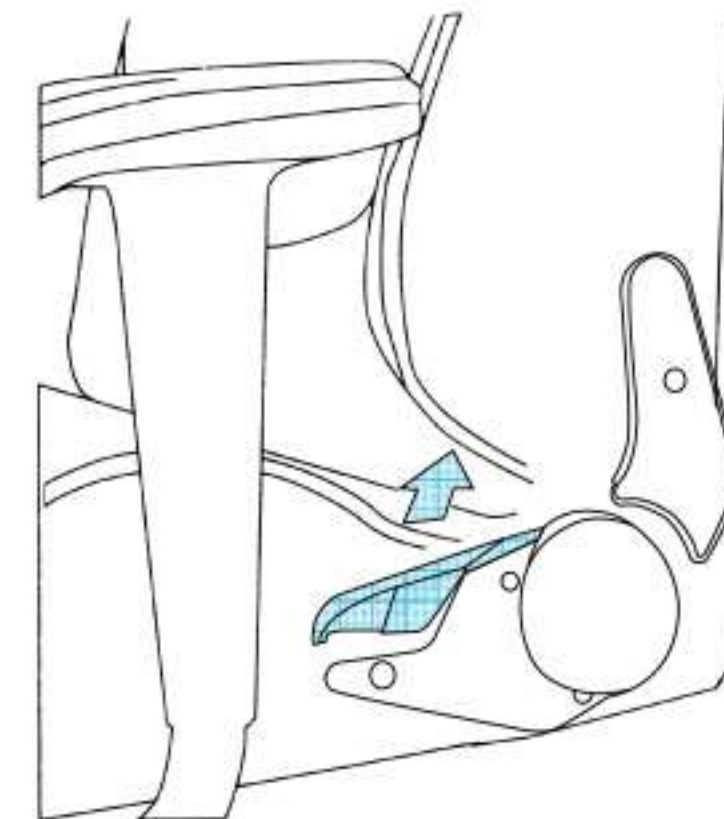

When tilting down the backrest to 180 degrees (if vigorously laying down) , you may hear noises of clicking. It's from the gear rotating, not a defect of the product.

You can control the tilt angle by adjust the handle. Pulling up the handle and find the angle position you want, release the handle to lock the tilt.