


### Features

- Acrylic
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 8 Flexjet™ whirlpool jets
- Less all trim
- 67" (1702 mm) x 42" (1067 mm) x 22" (559 mm)

### 5.5' BATH WHIRLPOOL K-1457-H2

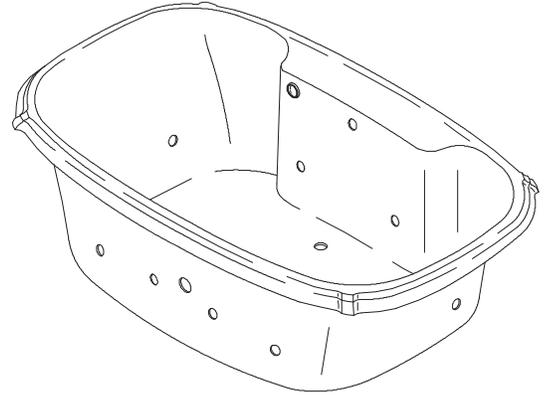

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- CSA B45.10
- CSA C22.2 No 218.2
- UL 1795
- ASTM E162
- ASTM E662

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-1457-H2	5.5 bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____	
<b>Required Accessories</b>				
K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
<b>Recommended Accessories</b>				
K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
<b>Optional Accessories</b>				
K-1703	Remote control		<input type="checkbox"/> NA	
K-9497	2.5" (64 mm) metal finish keypad trim	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

### Product Specification

The acrylic bath whirlpool shall be 67" (1702 mm) in length, 42" (1067 mm) in width, and 22" (559 mm) in height. Bath whirlpool shall have 8 Flexjets, a variable speed pump with 1.5 kW heater, and back-lit user control. Bath whirlpool shall be less all trim. Bath whirlpool shall be Kohler Model K-1457-H2-\_\_\_\_\_.

# PORTRAIT®

## Technical Information

Fixture*:			
Bathing well:			
Basin area, bottom	50" (1270 mm) x 29" (737 mm)		
Basin area, top	61" (1549 mm) x 32" (813 mm)		
Weight	130 lbs (59 kg)		
To overflow:			
Water depth	16" (406 mm)		
Capacity	100 gal (378.5 L)		
* Approximate measurements for comparison only.			
Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			
Included component:			
Cut-out template	113311-7		

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	208-240 V, 20 A, 50/60 Hz
--------------	---------------------------

## Installation Notes

**NOTE:** Pump protrusion beyond rim.

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 51 lbs/square foot (248 kg/square meter) loading.


Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

A minimum access panel is required.

No change in measurements with drain shown. (K-7161-AF or K-7161M-AF)

■ Recommended faucet area.

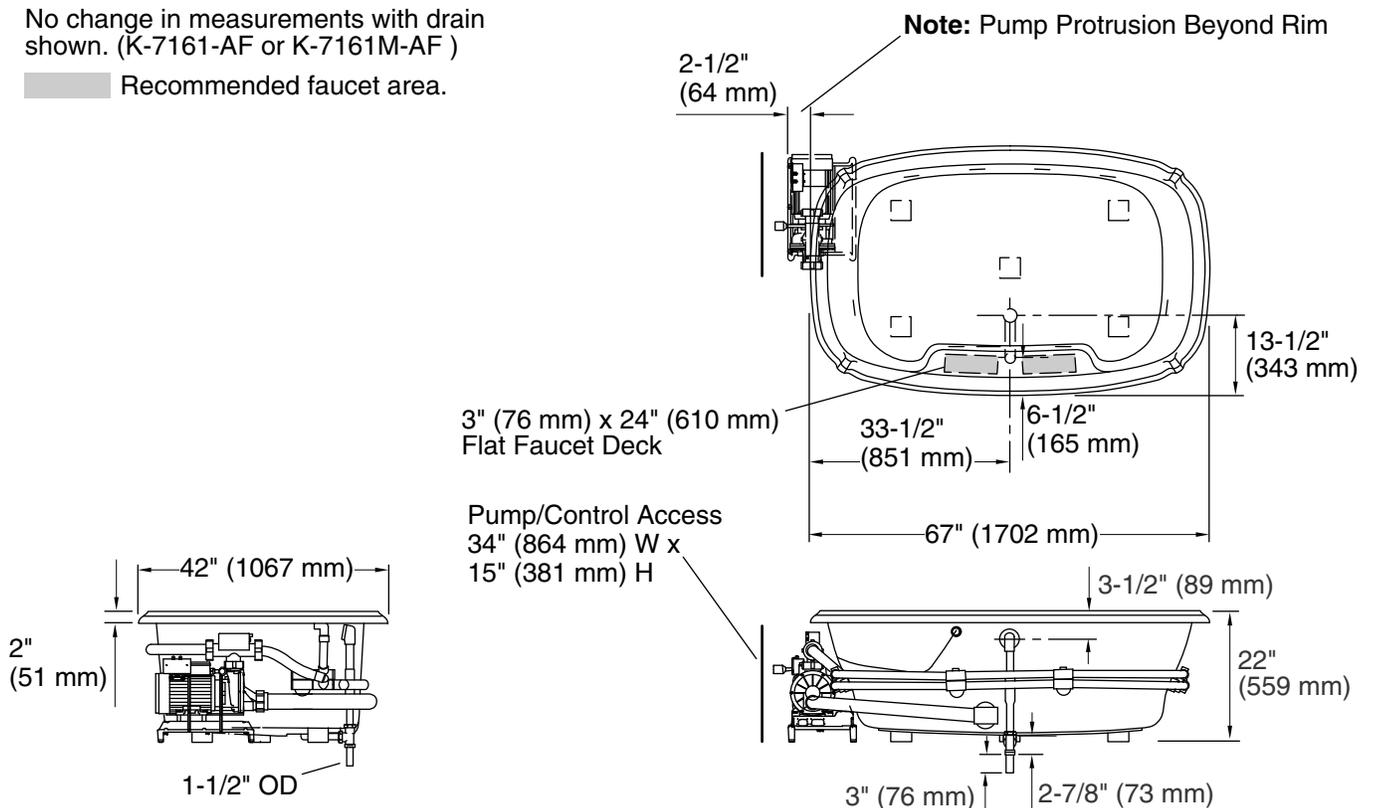

## Product Diagram