


3.5 Gallon Beverage Dispenser Assembly & Care Guide

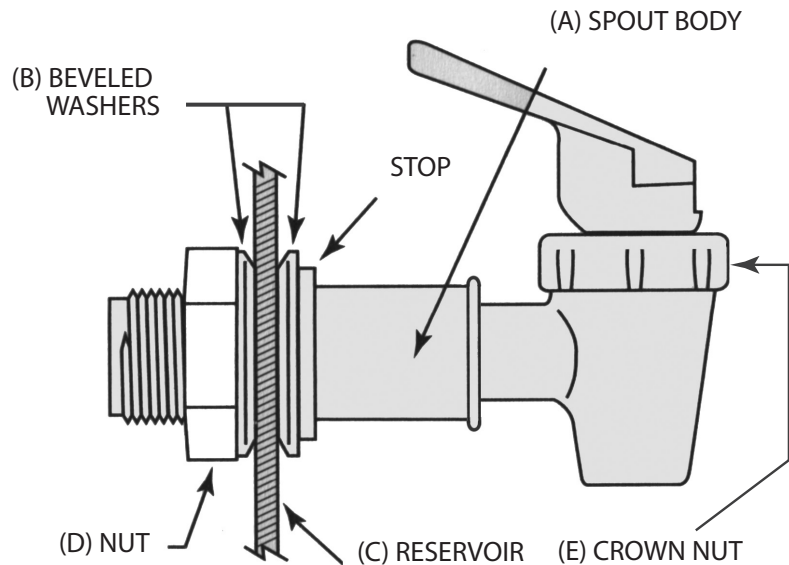

SPIGOT INSTALLATION

1. Place one (B) BEVELED WASHER onto (A) SPOUT BODY with beveled side facing away from spout and slide over threads until it is flush against stop on (A) SPOUT BODY.
2. Slide (A) SPOUT BODY through hole in wall of (C) RESERVOIR.
3. Place second (B) BEVELED WASHER over threads on (A) SPOUT BODY with bevel side facing the inside of (C) RESERVOIR wall and HAND TIGHTEN (D) NUT until the (B) BEVELED WASHERS are seated firmly against both sides of (C) RESERVOIR wall. DO NOT OVER TIGHTEN.


TROUBLE SHOOTING

If you experience a leak from the spigot, gently hand tighten the CROWN NUT (E).
If you experience a leak from the base of the spigot, gently hand tighten the NUT (D).

HOW TO USE THE ICE-CONE™

The Ice-Cone locks into place to resist buoyancy. Lower the Ice-Cone into the reservoir and turn clockwise to engage tabs (see below, **A**).

When using the Ice-Cone, fill reservoir with no more than 3 gallons of liquid (to allow for displacement caused by Ice-Cone). You can add ice to the Ice-Cone — or liquid to the reservoir — at any time without disassembly.

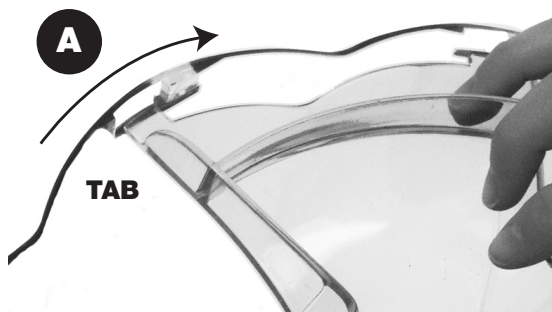

CARE & WASHING INSTRUCTIONS

Hand wash recommended, do not use abrasives.

Dry with a soft cloth.