



DESCRIPTION

Emergency battery backup for 7" slim surface LED model ADS7R9
Guarantees 90 minutes operation from battery in case of power outage

FEATURES & BENEFITS

- Self test function
- Switch time less than 1 second
- Over charge / discharge protection
- Durable die-cast aluminum with Li-ion battery

Project: _____



Location: _____

Qty: _____


Notes: _____

SPECIFICATION	
Applications	Healthcare, Offices, Hotels, Hospitality, etc.
Input Voltage	120 V AC 50/60 Hz
Charging Time	24 hours
Charging Current	185 mA
Switching Time	< 1 second
Output Voltage	65 V DC
Discharging Time	90 minutes
Output Current	45 mA
Output Power	3 W
Approved Location	Damp
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Certification	cETLus
Battery Life	500 Charging Cycles
Warranty	5 Year

DIMENSIONS

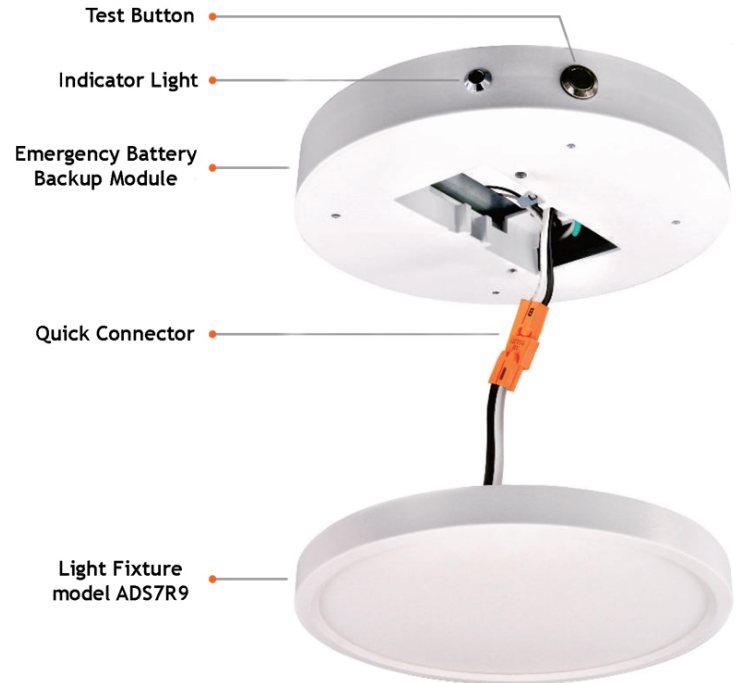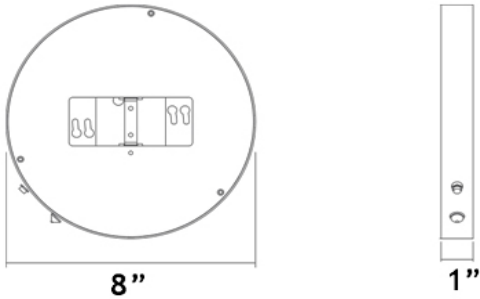

Fast & Easy Installation

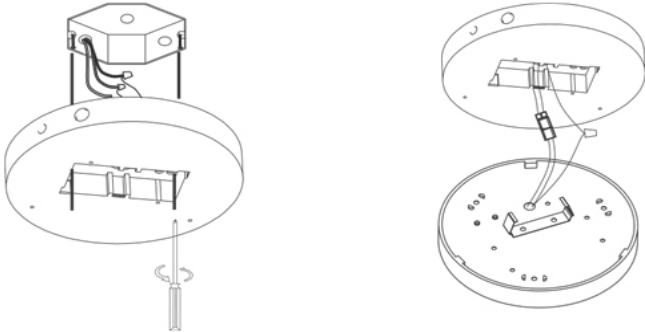

ORDERING GUIDE

model **EMB-SF001**