
60 INCH WIDE TV MEDIA STAND

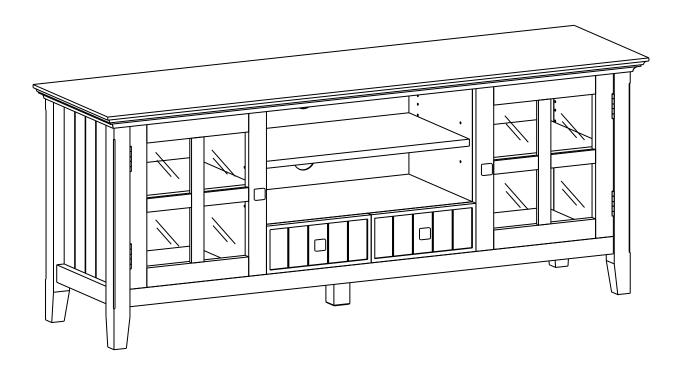

IMPORTANT: Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

SAFETY INFORMATION

CAUTION: Injuries and damage can occur from furniture tip over if product is not properly anchored to the wall. Use the Furniture Anti-Tipping Restraint provided with the product. Consult our assembly instructions for help. If the Furniture Anti-Tipping Restraint kit is not in the box, please contact our customer service department in order to obtain another kit before using the furniture.

Identify all the parts and hardware. Do not discard of the packaging until you have checked that you have all of the parts and hardware required. Hardware package may have spare parts.

WARNING: This item contains small parts which can be swallowed by children and pets. Keep children and pets away during assembly. To avoid danger of suffocation, always keep plastic bags away from children and pets. We recommend that you assemble this unit on a carpeted floor to avoid scratches. If using power tools, set the tool to low torque to avoid damage.

May require 2 people for ease of assembly.

IMPORTANT: Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

CARE and MAINTENANCE

Perhaps the greatest environmental damage to wood furniture comes from wide swings in relative humidity (RH) in our homes. Wood absorbs and desorbs water as relative humidity rises and falls, and in doing so it swells and shrinks. Making matters worse, it expands and contracts unequally along different grain directions. As humidity changes, the components of wooden objects are continually pushing and pulling against each other. This pressure often results in parts of furniture no longer fitting together closely or becoming distorted or breaking from their own internal stresses.

The response to relative humidity changes begins with determining the annual average RH for your particular space. Then try to keep the RH in the space where your furniture is as close to that average as possible, generally within about 10% up or down. De-humidify in the summer and humidify in the winter.


Be aware that raising the temperature lowers the humidity and vice versa. Thus, modern heating systems, which can drive down interior RH in the winter, almost invariably cause problems for furniture. To counteract their effect, you can either modify the RH by keeping furniture containing spaces cooler in the winter or most importantly, have a good working humidifier for your home. A humidistat automatically works to balance the humidity in your home so it is constant. Dry indoor air can suck enough moisture from its surroundings to do permanent damage to wood, causing it to crack or split.


Remember, that not all woods are created equal. Two factors that help determine how rapidly a wood will lose moisture are pore size and surface hardness. A piece made from a dense and hard wood will dry less rapidly than pieces made from softer woods.


Furniture that is sealed and lacquered will lose moisture more slowly than an unfinished piece while pieces with veneer finishes are not only stronger, but lose moisture more slowly than other finishes.


To help protect your wood furniture, take these steps:


- Use a humidifier, preferably one with an automatic control system that can sense the humidity level and adjust itself accordingly. Don't over-humidify; that can damage wood by causing it to expand and contract.
- Keep furniture out of direct sunlight, which can cause it to dry out, crack and warp.
- If you can avoid it, don't put furniture near heating vents. If you must, keep the piece 3 to 4 inches away from the wall, giving the heat and air space to circulate.
- Dust with soft dry cloth.
- Do not use liquid or aerosol products.
- To avoid marking, do not place rubber on surface (foot pads, etc.)
- For soil build-up, wipe with damp cloth & dry.
- Do not use abrasive cleaners.

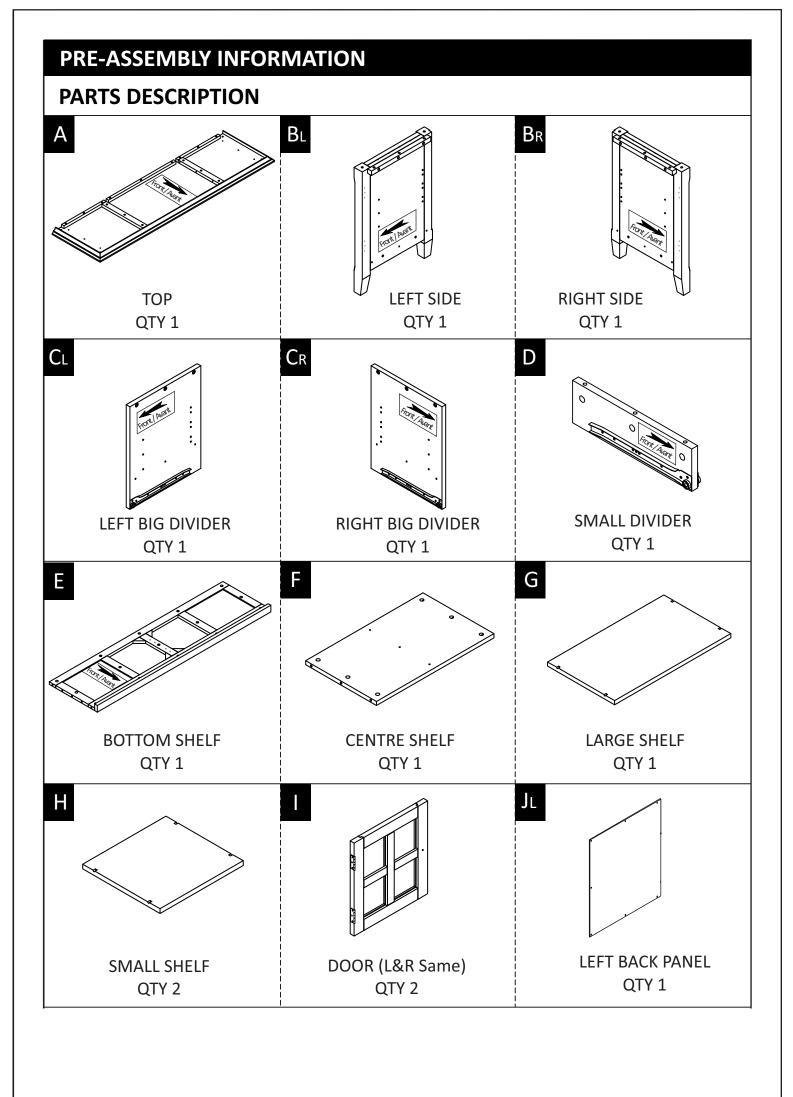

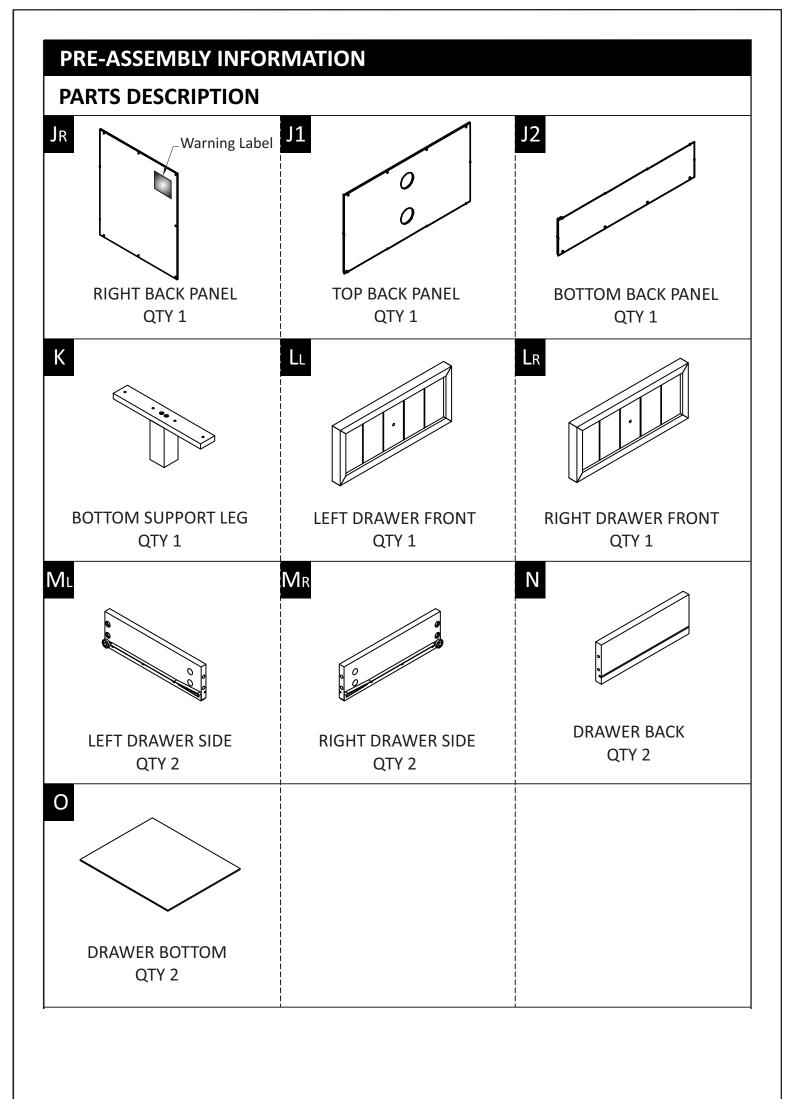

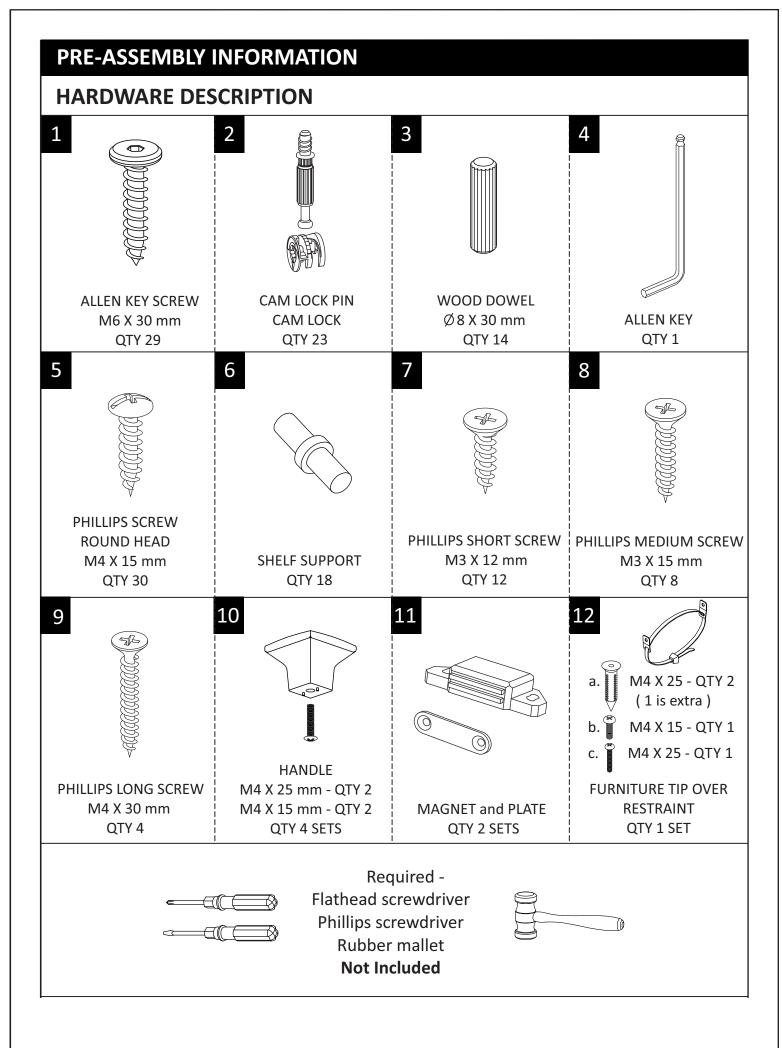


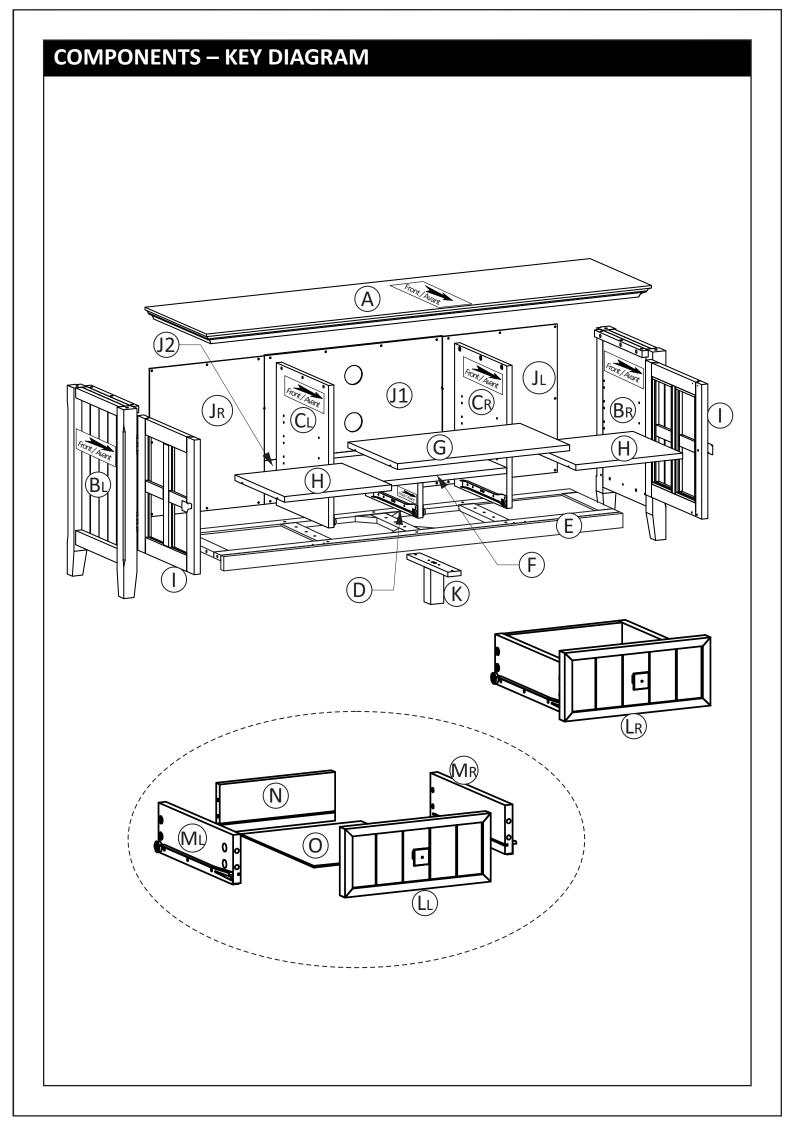

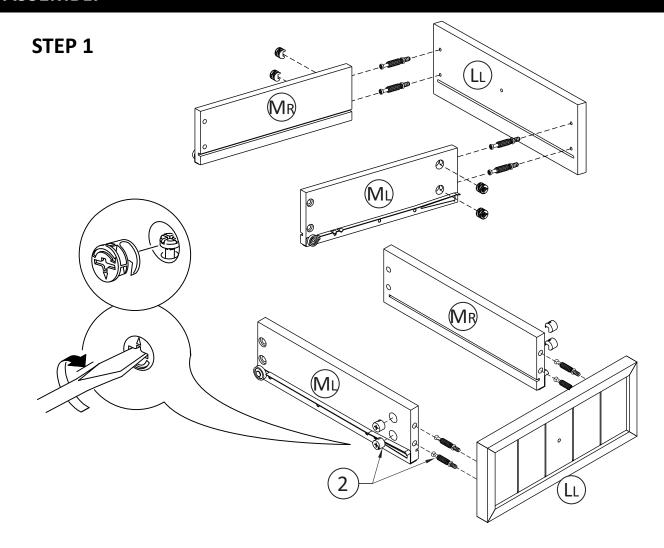


- 1. Attach 4 Cam Lock Pins 2 to back of Left Drawer Front (LL).
- 2. Align Cam Lock Pins with guide holes and attach Drawer Sides (ML), (MR).
- 3. Insert 2 Cam Locks (2) into guide holes on each Drawer Side (ML), (MR).
- 4. Use flathead screwdriver to secure Cam Locks.

STEP 2

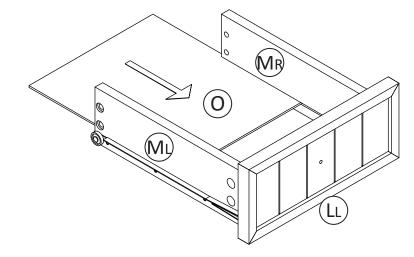


1. Slide Drawer Bottom O firmly into slots on Drawer Sides ML, MR and Left Drawer Front (LL).


STEP 3

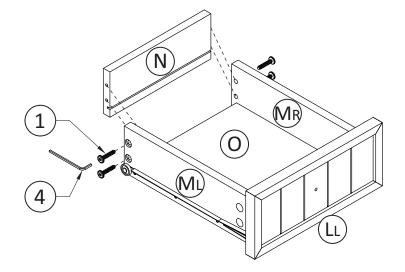

- 1. Align Drawer Back (N) with Drawer Bottom (O) and press firmly into slot .
- 2. Attach back using 2 Allen Key Screws 1) through guide holes on each Side (ML), (MR).
- 3. Use Allen Key 4 to tighten screws. Do not over-tighten.

STEP 4

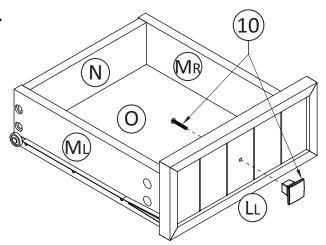





NOTE: The screwdriver is not included in the hardware pack.

1. Use Phillips Screwdriver to attach Handle (10) to Left Drawer Front (LL) .

Repeat Step 1-4 for the second drawer (with Right Drawer Front (R)).

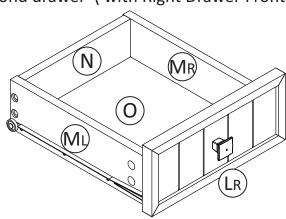


STEP 5

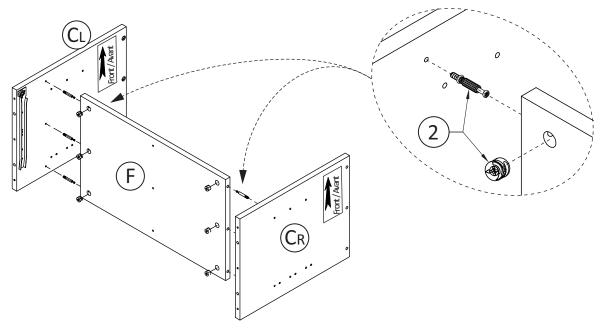


- 1. Attach 3 Cam Lock Pins (2) to each Big Divider (CL), (CR) into pre-drilled holes
- 2. Align and insert Cam Lock Pins on Big Dividers (CL), (CR) into guide holes on Centre Shelf(F).
- 3. Place 6 Cam Locks (2) into guide holes on Centre Shelf (F).
- 4. Use a flathead screwdriver to tighten Cam Locks into Pins.


STEP 6

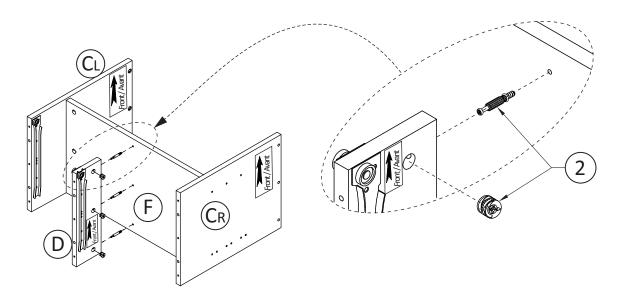

- 1. Attach 3 Cam Lock Pins(2) to Centre Shelf(F) into pre-drilled holes.
- 2. Align and insert Cam Lock Pins on Centre Shelf F into guide holes on Small Divider (D).
- 3. Place 3 Cam Locks 2 into guide holes on Small Divider D.
- 4. Use a flathead screwdriver to tighten Cam Locks into Pins.

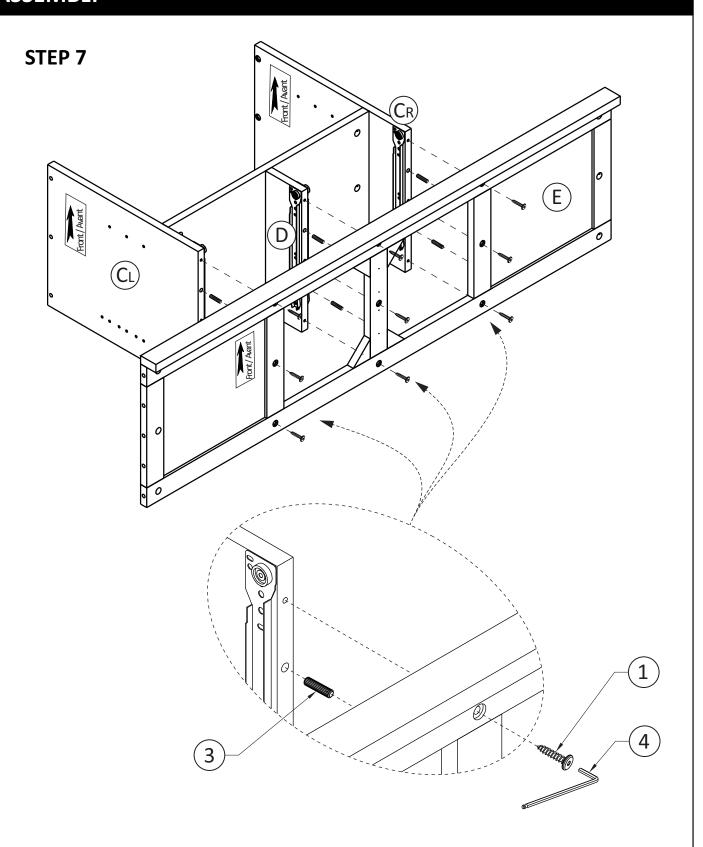


- 1. Insert 2 Dowels (3) into guide holes on each Big Divider (CL), (CR) and Small Divider (D).
- 2. Use rubber mallet to tap Dowels (3) into bottom of holes securely. ½ length of Dowels should be exposed.
- 3. Attach Big Dividers CL, CR and Small Divider D to Bottom Shelf E using 9 Allen Key Screws 1 through guide holes.
- 4. Use Allen Key 4 to tighten screws. Do not over-tighten.

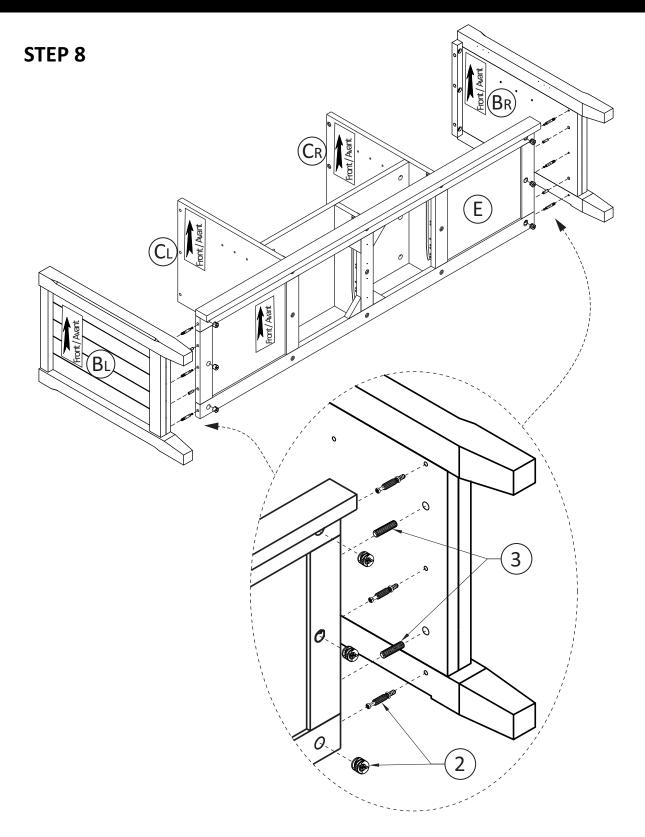


- 1. Insert 2 Dowels 3 into guide holes on each Side (BL), (BR).
- 2. Use rubber mallet to tap Dowels (3) into bottom of holes securely. ½ length of Dowels should be exposed.
- 3. Attach 3 Cam Lock Pins (2) to each Side (BL), (BR) into pre-drilled holes.
- 4. Align and insert Cam Lock Pins on Sides (BL), (BR) into guide holes on Bottom Shelf (E).
- 5. Place 6 Cam Locks 2 into guide holes on Bottom Shelf (E).
- 6. Use a flathead screwdriver to tighten Cam Locks into Pins.


STEP 9

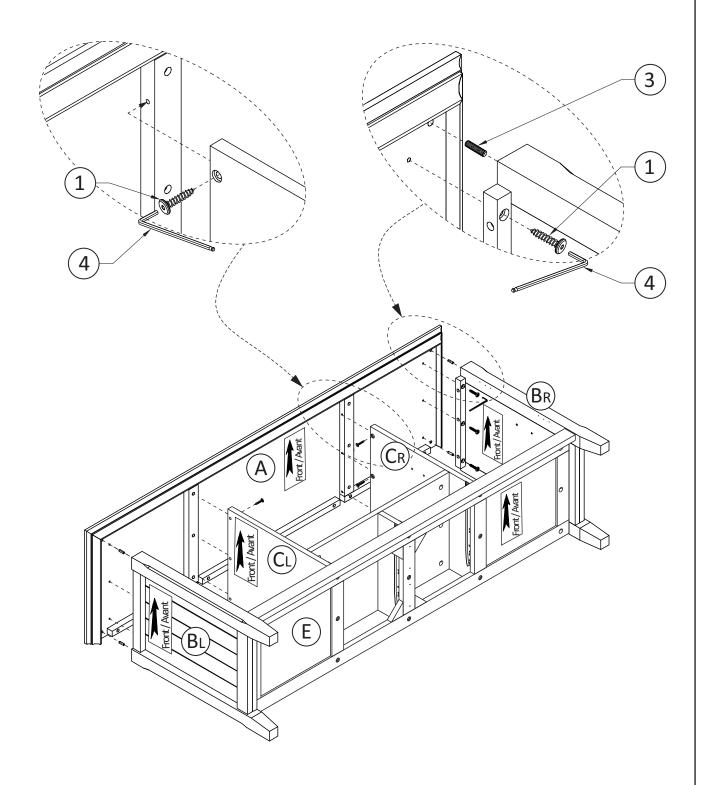


- 1. Insert 2 Dowels (3) into top corners of each Side (BL), (BR).
- 2. Use rubber mallet to tap Dowels (3) into bottom of holes securely. ½ length of Dowels should be exposed.
- 3. Align guide holes bottom corners of Top (A) with Dowels (3) on Sides (BL), (BR).
- 4. Attach Top (A) to Sides (BL), (BR) and Big Dividers (CL), (CR) using 12 Allen Key Screws (1).
- 5. Use Allen Key (4) to tighten screws. Do not over-tighten.

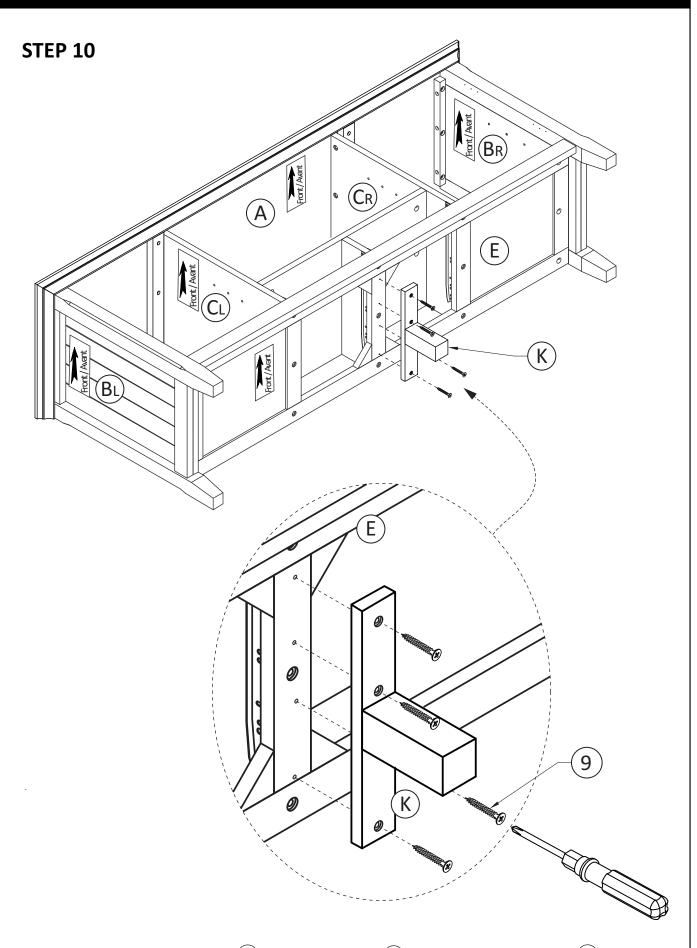

- 1. Attach Bottom Support Leg (K) to Bottom Shelf (E) using 4 Phillips Screws (9).
- 2. Use Phillips screwdriver to tighten screws. Do not over-tighten.

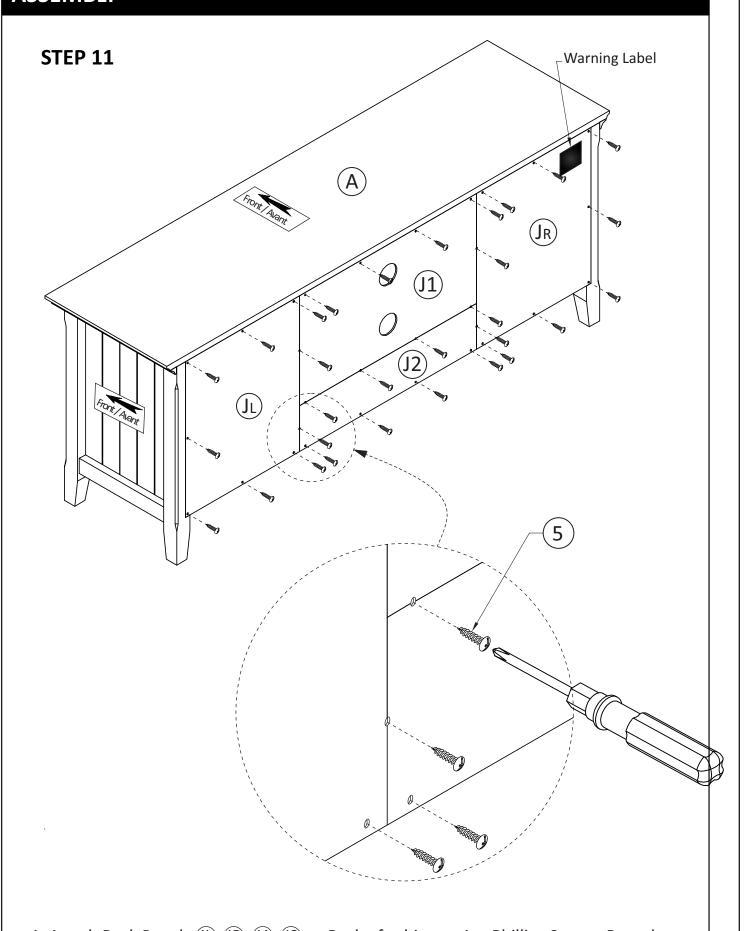


- 1. Attach Back Panels (JL), (JR), (J1), (J2) to Back of cabinet using Phillips Screws Round Head (5) into guide holes.
- 2. Use Phillips screwdriver to tighten screws. Do not over-tighten.

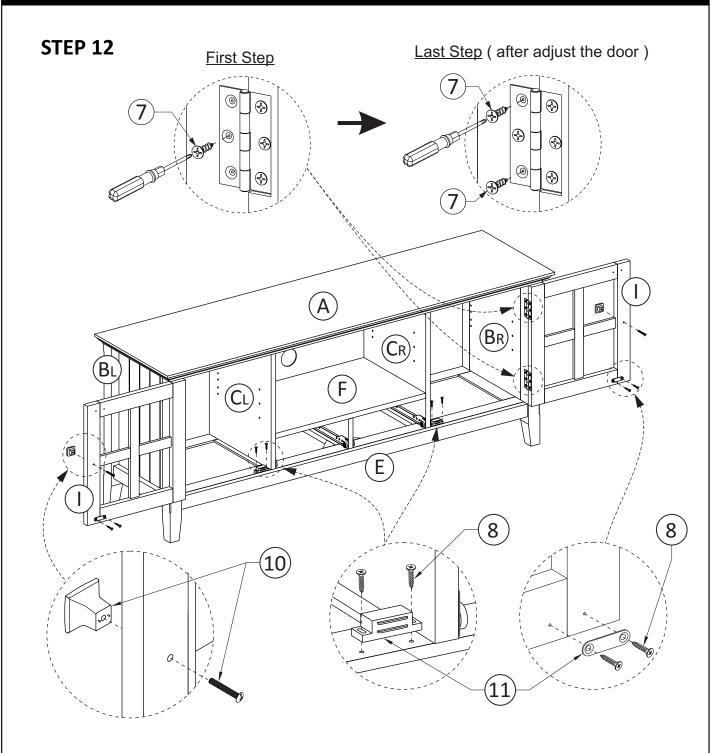

- 1. Attach hinges on Doors (I) to Sides (BL), (BR) using Phillips Screws (7) into pre-drill holes:
 - Using Phillips screwdriver to attach Screws 7 at middle hole of hinges for both top & bottom hinges.
 - Adjust the door to ensure they are aligned straight & square with bottom shelf & side.
 - Using Phillips screwdriver to tighten the rest of screws 7 into pre-drill holes (top & bottom holes on hinges).
- 2. Attach Magnet Plates 11 to bottom corner of Doors 1 using Phillips Screws 8 into pre-drilled holes on Doors 1.
- 3. Attach Magnets 11 using Phillips Screws 8 into pre-drilled holes on Bottom Shelf E.
- 4. Use Phillips screwdriver to attach Handles 10 to Doors 1 through guide holes.

ASSEMBLY STEP 13 shelf level 1 shelf support anti - tipping shelf level 2 shelf level 3 **(6)** 1. Use 4 Shelf Supports 6 for each Shelf G , H in desired location. 2. 2 Shelf Supports 6 may be used on back top of each Shelf 6, H as a tipping restraint.

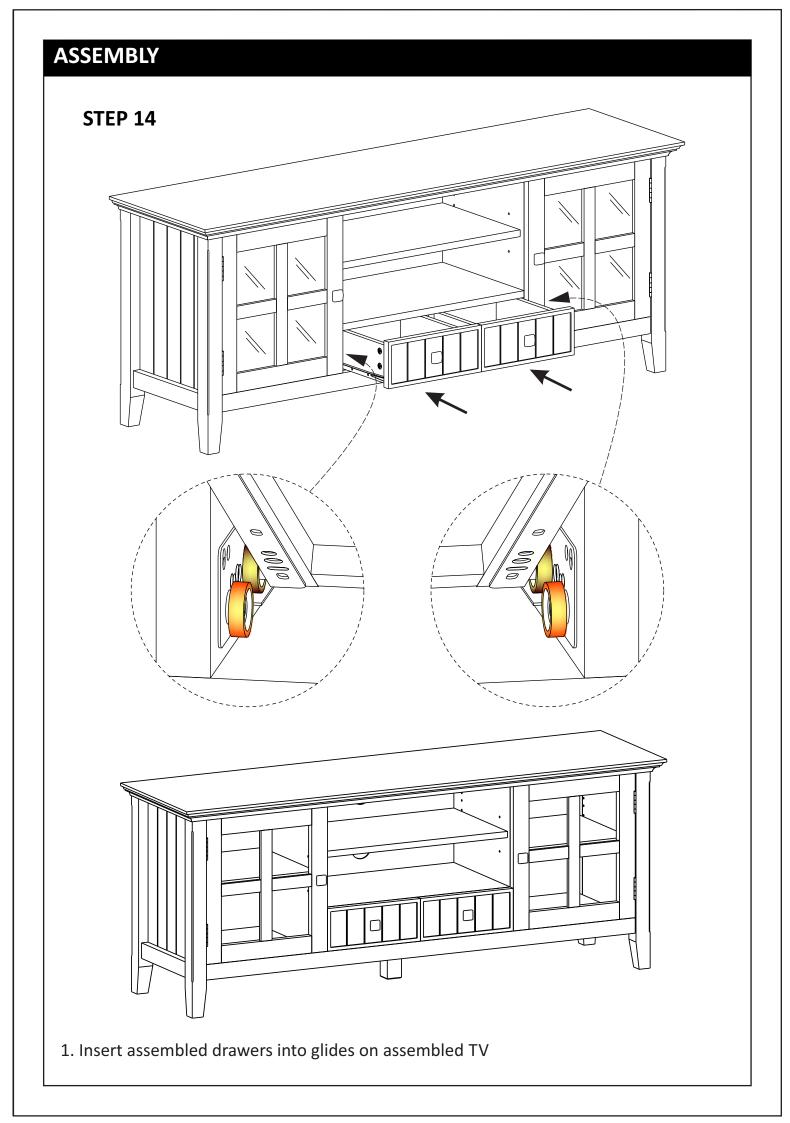


FURNITURE TIP OVER RESTRAINT ASSEMBLY



WARNING


Serious or fatal crushing injuries can occur from furniture tip-over. If the furniture tip over restraint kit is not in the box, please contact our customer service department in order to obtain another kit before using the furniture.

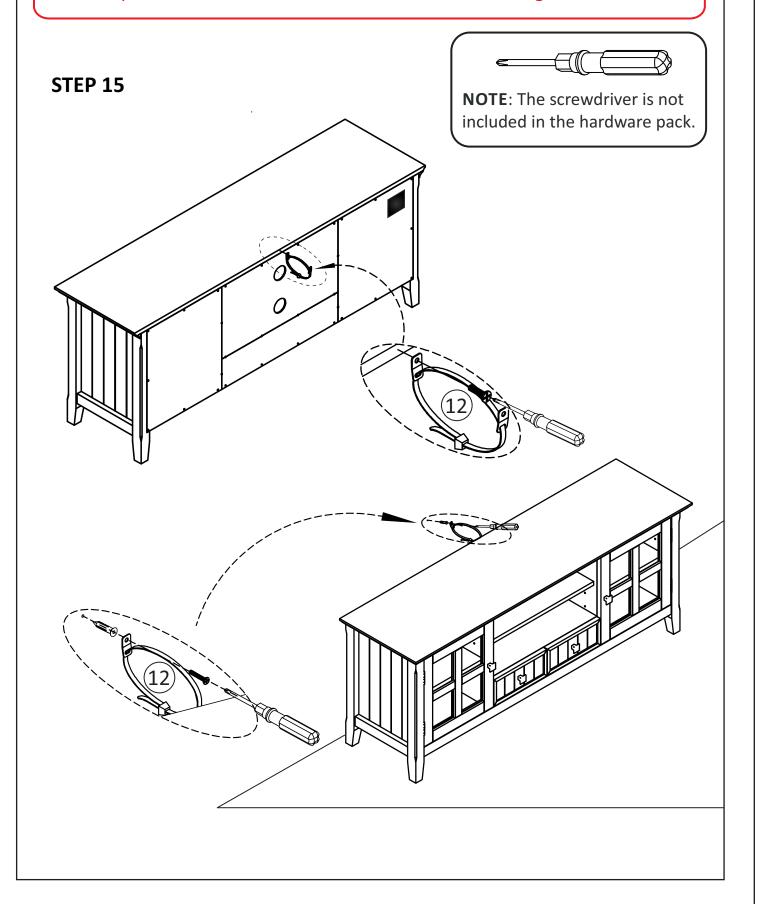


FURNITURE TIP OVER RESTRAINT ASSEMBLY

Furniture Tip Over Restraint Instructions:


1. Attach one of the mounting brackets securely to the back edge of the furniture. Use the shorter screw.



2. Determine where furniture is to be placed and mark location on the wall for mounting bracket screw hole approximately 2 inches **below** the bracket mounted to the furniture.



- 3. Drill a 3/16 inch hole in the wall. Press the plastic anchor into the hole and gently tap until the flange on the anchor is against the wall surface.
- 4. Position the bracket over the anchor and use the longer screw to securely attach the bracket to the wall.
- 5. Place the furniture so the back edge is in line with the bracket on the wall.
- 6. Lace an end of the nylon zip-tie strap down through each bracket. Bring both ends together and slide the smooth side upright through the square-shaped end and pull through to create the "locked" position.
- 7. Check to make sure the strap is securely laced and locked to the brackets.



- DO NOT place heavy objects in top drawers
- **DO NOT** let children climb or hang on drawers, doors or shelves

WARRANTY

Thank you for purchasing our product. These products have been made to demanding, high-quality standards and are guaranteed for domestic use against manufacturing faults for a period of 12 months from the date of purchase. This warranty does not affect your statutory rights.

We reserve the right to repair or replace the defective product, at its discretion.

This product is guaranteed for 12 months if used for normal purposes. Any warranty is invalid if the product has been overloaded or subject to neglect, improper use or an attempted repair by other than an authorized agent. Heavy-duty or daily professional/commercial usage are not guaranteed.

Due to continuous product improvement, we reserve the right to change the product specifications without prior notice.