


					Type	
Finish					Dimensions (Inches)	
Catalog No.	Brushed Nickel	Polished Chrome	Antique Bronze	White	Lamping	
						A B
					1 (m) 60w	11-1/2 3-3/4
					2 (m) 60w	14 4-3/4

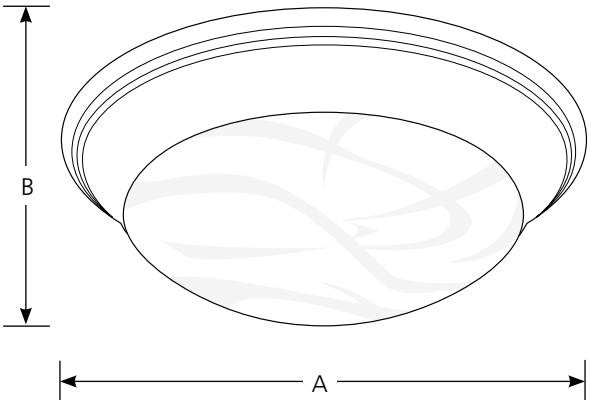

Specifications:

General

- Alabaster glass bowl
8-5/8" dia., 3-1/8" ht.
10-7/8" dia., 4" ht.
- Plated Brushed Nickel (-09), Polished Chrome (-15) finishes
- Hand painted Antique Bronze (-20), White (-30) finishes
- Steel construction
- Glass twist-locks into pan for easy relamping
- No exposed fasteners
- Stamped ceiling pan with ribbed details
- Companion fixtures: any style with matching finishes

Mounting

- Ceiling flush mount
- Ceiling pancovers a standard 4" hexagonal recessed outlet box
- Mounting strap for outlet box included
- Twist-lock glass

Electrical

- Medium base ceramic sockets
- Pre-wired

Labeling

- UL-CUL Damp location listed



FLUSH MOUNT

No. Lamps: 1 Type Lamp: 60A19-GE Total Lumens: 865


Fixture Efficiency: 54.3%

S/MH Ratio: 1.3

Quick Calculator Charts

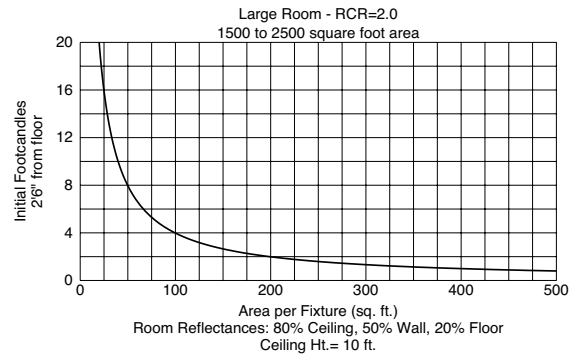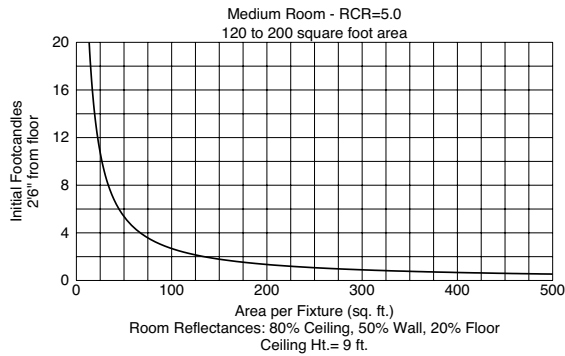

DISTRIBUTION CURVE

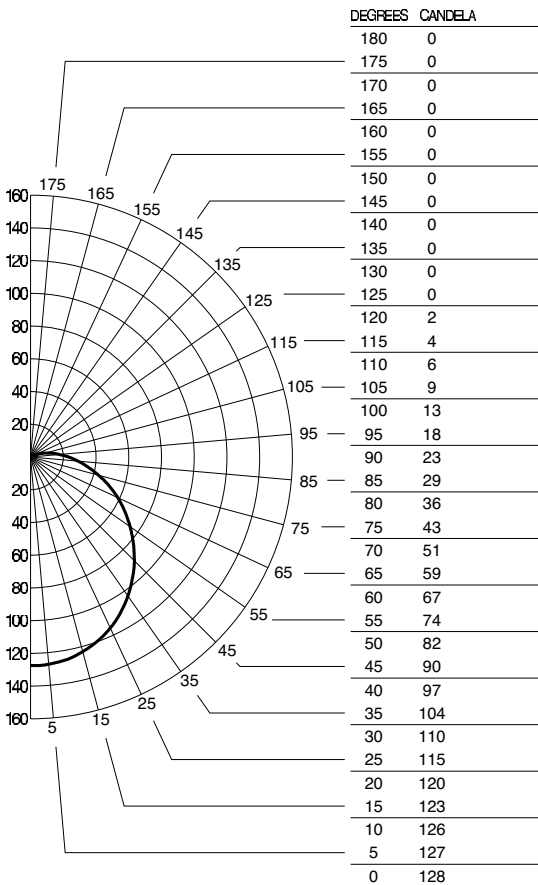

Single Fixture Data

Ceiling Ht.(Ft.)	10% Values Beam Angle - 112		Zero Degrees Ft.-C	50% Values Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.4	16	4.2	2.1	7
10	0.2	22	2.3	1.1	10
12	0.1	28	1.4	0.7	12
14	0.1	34	1.0	0.5	15
16	0.1	40	0.7	0.3	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

		Effective Floor Cavity Reflectance 0.20																			
		80				70				50				30				10			
RC	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
0		64	64	64	64	62	62	62	62	58	58	58	55	55	55	52	52	52	50		
1		57	54	51	48	55	52	49	47	49	47	45	46	44	43	43	42	41	39		
2		51	46	42	38	49	45	41	37	42	39	36	40	37	34	37	35	33	32		
3		46	40	35	31	45	39	34	31	37	33	30	34	31	29	33	30	28	26		
4		42	35	30	26	41	34	29	26	32	28	25	31	27	24	29	26	23	22		
5		39	31	26	22	37	30	26	22	29	25	21	27	24	21	26	23	20	19		
6		36	28	23	19	34	27	23	19	26	22	19	25	21	18	23	20	18	16		
7		33	25	20	17	32	25	20	17	24	19	16	22	19	16	21	18	16	14		
8		31	23	18	15	30	23	18	15	22	17	15	21	17	14	20	16	14	13		
9		29	21	17	13	28	21	16	13	20	16	13	19	15	13	18	15	12	11		
10		27	20	15	12	26	19	15	12	18	14	12	17	14	12	17	14	11	10		



FLUSH MOUNT

No. Lamps: 2 Type Lamp: 60A19-GE Total Lumens: 1730

Fixture Efficiency: 55.0%


S/MH Ratio: 1.3

Quick Calculator Charts

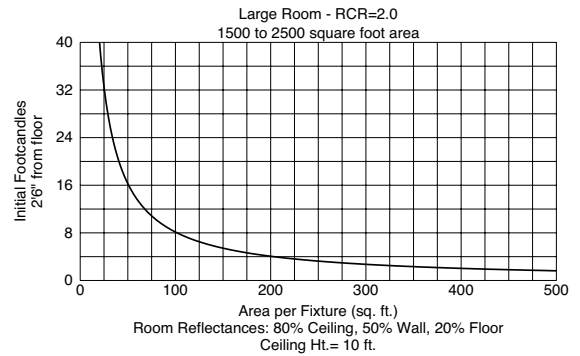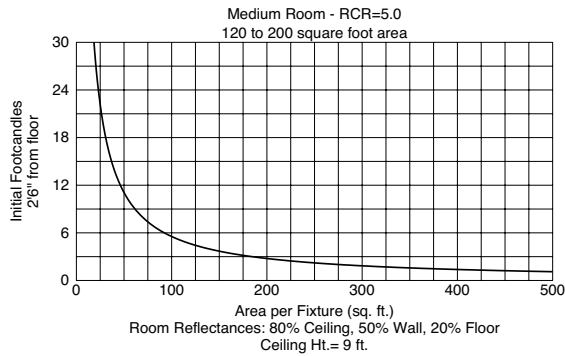

DISTRIBUTION CURVE

INTENSITY DATA

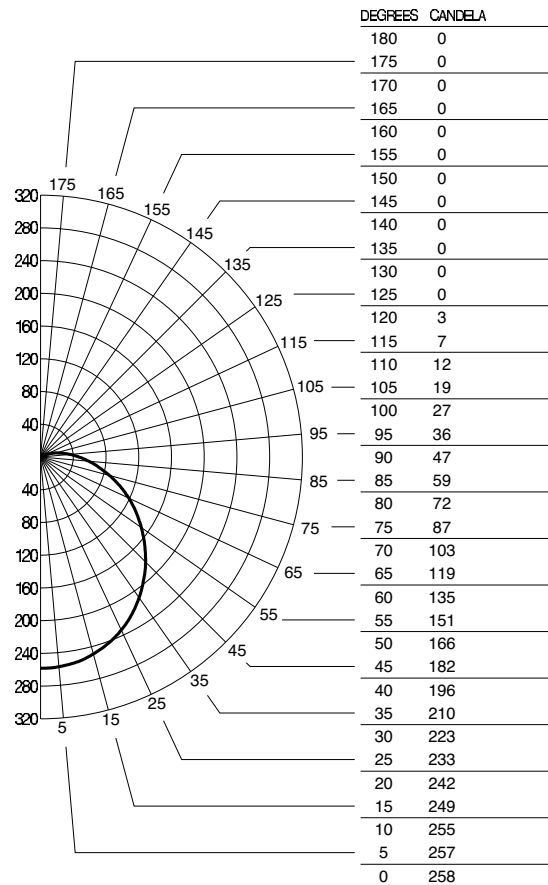

Single Fixture Data

Ceiling Ht.(Ft.)	10% Values Beam Angle - 112		Zero Degrees Ft.-C	50% Values Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.9	16	8.5	4.3	7
10	0.5	22	4.6	2.3	10
12	0.3	28	2.9	1.4	12
14	0.2	34	2.0	1.0	15
16	0.1	40	1.4	0.7	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

RC		Effective Floor Cavity Reflectance 0.20																			
		80					70					50					30				
RW		70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
0		65	65	65	65	63	63	63	63	59	59	59	56	56	56	53	53	53	51		
1		57	54	51	49	56	53	50	48	49	47	45	47	45	43	44	43	41	40		
2		52	47	42	39	50	45	41	38	43	39	36	40	37	35	38	36	34	32		
3		47	40	36	32	45	39	35	31	37	33	30	35	32	29	33	30	28	26		
4		43	36	30	26	41	35	30	26	33	29	25	31	27	24	29	26	24	22		
5		39	32	26	23	38	31	26	22	29	25	22	28	24	21	26	23	20	19		
6		36	28	23	20	35	28	23	19	26	22	19	25	21	18	24	20	18	17		
7		33	26	21	17	32	25	20	17	24	20	17	23	19	16	22	18	16	15		
8		31	23	19	15	30	23	18	15	22	18	15	21	17	14	20	17	14	13		
9		29	21	17	14	28	21	17	13	20	16	13	19	16	13	18	15	13	12		
10		27	20	15	12	26	19	15	12	18	15	12	18	14	12	17	14	11	10		