Ceiling Light

Installation Guide

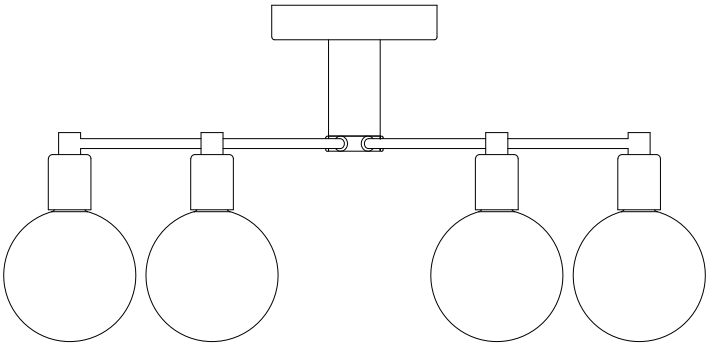

EN Indoor use only.

IMPORTANT: Installation must comply with current IEE Wiring Regulations and Building Regulations. Installation **must be** carried out by a qualified electrician.

INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.
Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION

- **Installation must be carried out by a qualified electrician.**
- This fitting should be fitted in accordance with current IEE Wiring Regulations and Building Regulations.
- To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- This fitting is Class 1 (Earthed)= ⏚ and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- When changing the bulb, always switch off at the mains and allow the old bulb to cool clown before handling. Dispose of used bulbs carefully
- Ensure there are no electrical wires, water pipes, or gas lines directly behind the ceiling surface where you intend to drill or screw.
- Use appropriate fixings suitable for the ceiling type (e.g. plasterboard, concrete, timber joist).
-

WIRING & MOUNTING

1. Ensure the house electricity supply is off at the fuse board.
2. If you are fitting this product in place of an existing one, you may find that there are more than 3 sets of cables connected. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting. Before removing existing fitting, carefully note position of each set of cables
3. Remove the mounting bracket from the ceiling cup by removing the 2 screws located in the side.
4. Using the mounting bracket as a template, mark and drill fixing holes in the ceiling. Ensure the holes are drilled into a joist or other suitable mounting and not just into plaster.
5. Secure the mounting bracket to the surface using suitable fixings for the type of material.
6. The weight of the fitting must be supported whilst making the electrical connections as follows:

Household circuit		Fitting wire
Blue or Black (Neutral)	connect to	Blue or wire marked "N"
Red or Brown Switched Live	connect to	Brown or Red wire marked "L"
Green/Yellow sleeved copper (Earth)	connect to	Green/Yellow or wire marked " ⏚ "

Ensure that all connections are tight and no loose strands are left out of the connector. Snap the cover of the connector block closed ensuring the wires are not trapped. Wrap two layers of electrical insulation tape around the connector block and around the wiring 2cm each side of the connector block - (see Fig 2.)

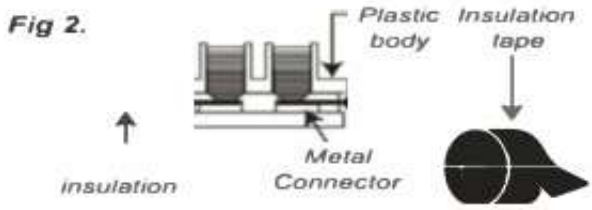

7. Offer fitting up to the mounting bracket and secure in place using the screws removed earlier. Take care not to damage wiring.
8. Fit the bulb: Type and wattage as indicated on the fitting. The wattage indicated must not be exceeded.
9. Screw glass shade over each lampholder gently. Ensure shade is secured in place.
10. Switch on the electricity supply at the fuse board and enjoy using your new light.

Contents

1 x Light fitting including fixing bracket with side screws and lock washers.

1 x Fixing pack containing 3-way connection block, 2 fixing screws, plugs.

6 x Glass Shades.

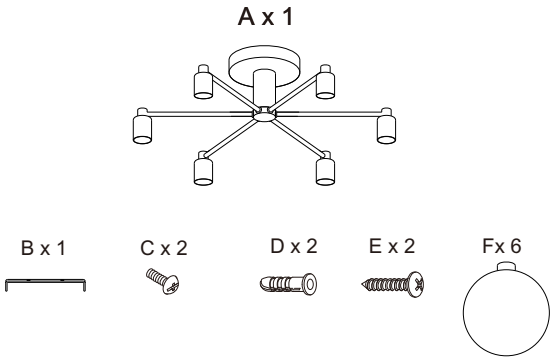

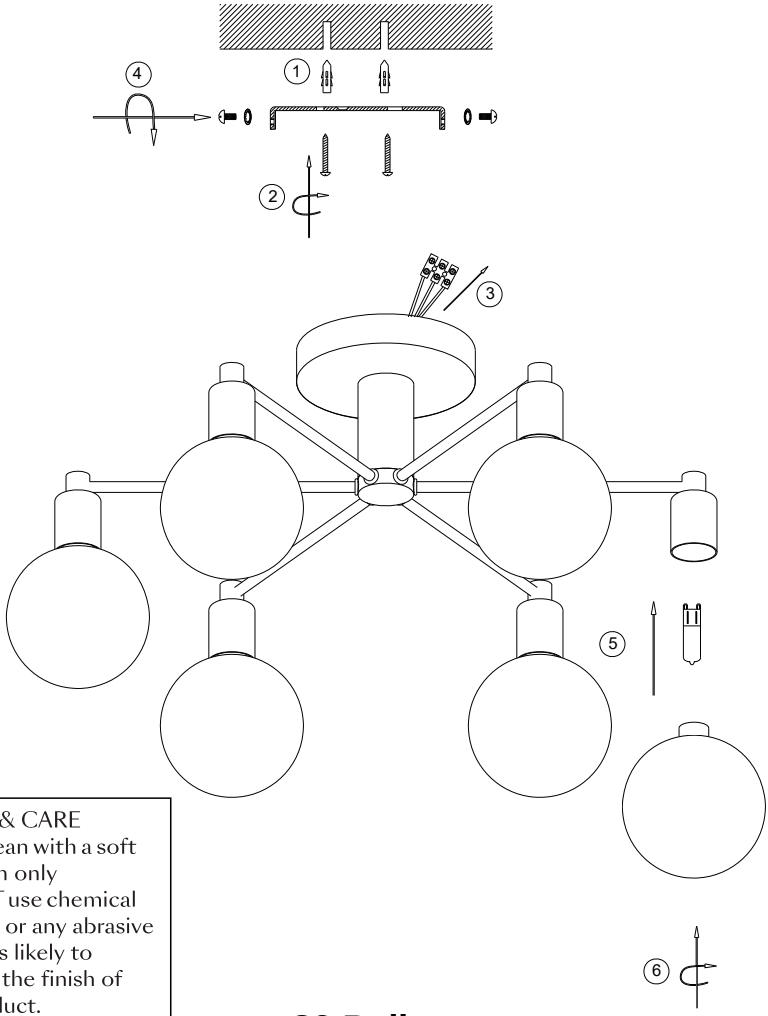

CLEANING & CARE

- Wipe clean with a soft dry cloth only
- Do NOT use chemical cleaners or any abrasive materials likely to damage the finish of the product.

G9 Bulb -
Max 7W LED
bulb not included

Indoor use only.

2


C x 2
B x 1
A x 1

3


D x 2
E x 2

4

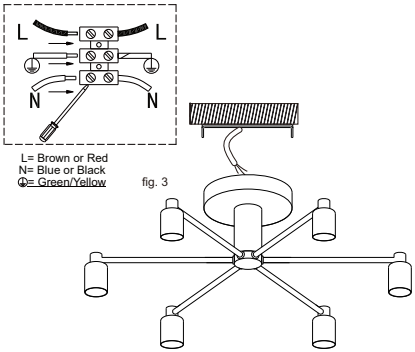
L
L
N
N
L= Brown or Red
N= Blue or Black
⏚= Green/Yellow
fig. 3

5

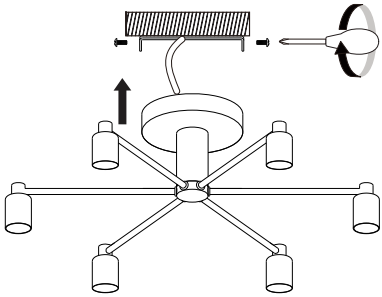

6&7

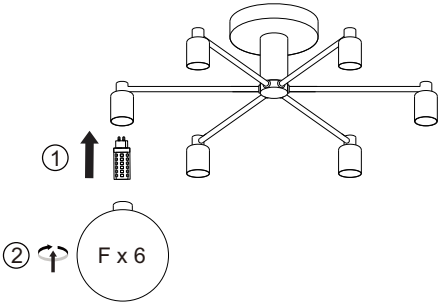
①
②
F x 6

Installation Steps

STEP 1

TURN OFF POWER SUPPLY

Unpack and Check Parts:
Base plate (mounts to ceiling)
Central body
6 arms or bulb holders
6 glass globes/shades
Screws, washers, decorative rings

STEP 2

Remove the Mounting Bracket
Unscrew the two side screws to detach the mounting bracket from the ceiling cup.

STEP 3

Install the Mounting Bracket
Use the bracket as a template to mark the fixing holes on the ceiling.
Ensure no pipes or wires are directly behind where you intend to drill.
Drill into a joist or other solid surface (not just plaster), and secure the bracket using suitable fixings for the ceiling material.

STEP 4

Ensure Power Supply Remains OFF
Match the wires from the ceiling to the fixture:
Home Wire ----------**Fixture**
Blue/Black (N) → Neutral (N)
Red/Brown (L) → Live (L)
Green/Yellow (Earth) → Earth (⏚)
Use the provided connectors to join them securely.
Tuck the wires neatly inside the ceiling plate.

STEP 5

Attach the Fitting

Lift the fitting up to the mounting bracket and secure it using the screws.

STEP 6

Fit the Bulbs

Insert bulbs of the correct type and wattage as indicated on the fitting. Do not exceed the recommended wattage.

STEP 7

Attach the Glass Shades

Gently screw the glass shade over each lamp holder. Ensure each shade is securely tightened.

our 1 year GUARANTEE

Our products come with a 1 year guarantee, giving you extra peace of mind when shopping with us

What the guarantee covers

PRE-INSERTED FIXINGS

FAULTY JOINTS

EXTERNAL FIXING FAULTS

STRUCTURAL INTEGRITY