

# FORTY WEST DESIGNS INC

## ASSEMBLY & INSTALLATION INSTRUCTION FOR #71304

Please read carefully and save these instructions, as you may need them at a later date.

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.


### ASSEMBLY AND INSTALLATION

For Pendant lamp:

1. Install FRAME(1.1) into the strain relief and used ALLEN KEY (2) to tighten, FRAME (1.2) set into the shade. Install the desired number of IRON TUBE (3/4/5/6/7/8/9) onto FRMAE(1). Add TUBES by threading into each other. Attach the Canopy (10) to the top TUBE. Rotate clockwise to tighten.
2. Connect the GROUND WIRE from the canopy to JUNCTION BOX, make the electrical connections by using the wire nut, Connect the NEUTRAL(WHITE) WIRE from fixture to NEUTRAL WIRE from power supply with the wire nut. Connect the LIVE (BLACK) WIRE from fixture to LIVE WIRE from power supply with the wire nut.
3. Fasten plate (12) to junction box with screws (13).
4. Attach the FIXTURE to the plate (12) with screws (14).
5. Screw light bulbs into the sockets and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label, **MAXIMUM 40W.**

For Ceiling lamp:

1. Install FRAME(1.1) into the strain relief and used ALLEN KEY (2) to tighten, FRAME(1.2) set into the shade. Canopy (10) connect to FRMAE(1) and rotate clockwise to tighten.
2. Connect the GROUND WIRE from the canopy to JUNCTION BOX, make the electrical connections by using the wire nut, Connect the NEUTRAL(WHITE) WIRE from fixture to NEUTRAL WIRE from power supply with the wire nut. Connect the LIVE (BLACK) WIRE from fixture to LIVE WIRE from power supply with the wire nut.
3. Fasten plate (12) to junction box with screws (13).
4. Attach the FIXTURE to the plate (12) with screws (14).
5. Screw light bulbs into the sockets and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label, **MAXIMUM 40W.**

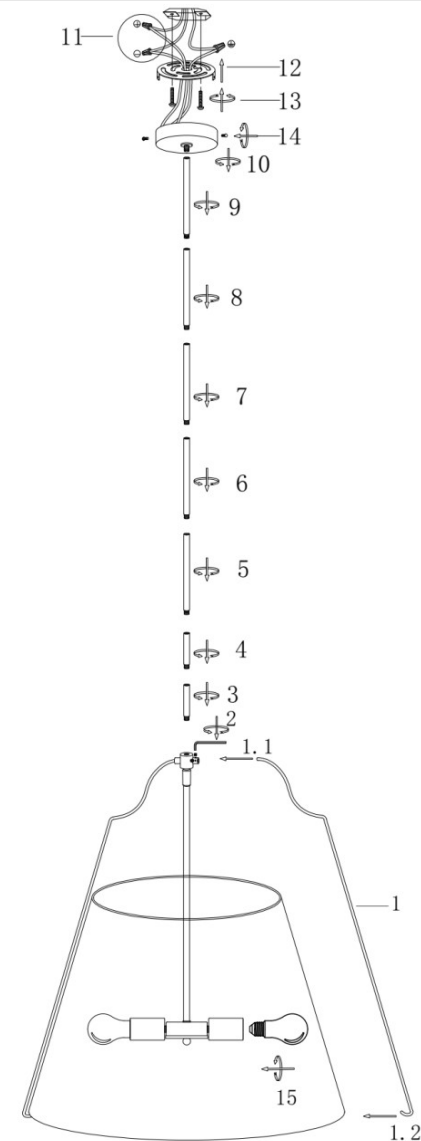

1. FRAME
2. ALLEN KEY
3. IRON TUBE
4. IRON TUBE
5. IRON TUBE
6. IRON TUBE
7. IRON TUBE

8. IRON TUBE
9. IRON TUBE
10. CANOPY
11. NEUTRAL WIRE/LIVE WIRE/  
GROUND WIRE
12. PLATE
13. SCREW
14. SCREW