

# C U R R E Y & C O M P A N Y

5000-0177

## Assembly and Installation Instructions

### CAUTION:

- **BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.**

### Important Safety Instructions:

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- This fixture has been rated for Incandescent Light Bulbs. (Light bulbs not included)
- To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor use, SUITABLE FOR DRY OR DAMP LOCATION.
- **Save these instructions.**

### WARNING:

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.**

### Pre-assembly:

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

### Parts and Hardware Included:

- |                        |                            |
|------------------------|----------------------------|
| (1) BACKPLATE (A)      | (2) OUTLET BOX SCREW (D)   |
| (1) MOUNTING PLATE (B) | (1) GREEN GROUND SCREW (E) |
| (2) MOUNTING SCREW (C) | (3) WIRE NUT (F)           |
| (2) BALL NUT (G)       | (1) METAL SHADE (H)        |
| (1) SOCKET RING (I)    |                            |

**TOOLS REQUIRED (not included):** Ladder, Phillips Head & Flat Blade Screwdrivers, Pliers, Wire Cutter/Stripper & Electrical Tape.

### Assembly Instructions:


1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Carefully unpack all fixture parts and hardware and lay them out on a clear workspace.
3. Attach the MOUNTING PLATE (B) to the wall outlet box using the OUTLET BOX SCREW (D). Align the slots of the MOUNTING PLATE (B) with the two threaded holes located on the outlet box. Use a screwdriver to tighten each screw until the MOUNTING PLATE (B) is firmly secured to the outlet box.
4. Carefully inspect the wall sconce fixture wires. The NEUTRAL FIXTURE WIRE is WHITE or has FINE LONGITUDINAL RIDGES running along its length. The HOT FIXTURE WIRE is BLACK or SMOOTH and the bare copper wire is the GROUND WIRE. If you have any doubt and cannot identify the power-supply wires with confidence, then we recommend that you ask an electrician to continue with the installation.
5. Gently pull existing wire from the junction box and allow wires to hang. The HOT or LIVE wire is usually black. The NEUTRAL wire is usually white. Check to see if there is a ground wire that is usually green or green with a yellow stripe or exposed copper metal wire. If needed, use a pair of wire strippers to remove about 1/2 inches of insulation from each wire.
6. Attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the outlet junction box (J-box) (usually green insulation or bare wire). Fasten each together with a WIRE NUT (F) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet junction box DOES NOT have a GROUND WIRE, be sure to insert the GREEN GROUND SCREW (E) into the MOUNTING PLATE (B), marked as "GND", facing front and wrap the fixture's bare ground wire around the GREEN GROUND SCREW (E). Tighten screw to clamp ground wire between ground screw head and MOUNTING PLATE (B). **IT IS IMPERATIVE THAT THE JUNCTION BOX IN YOUR HOME BE PROPERLY GROUNDED!**
7. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white insulation). Fasten each together with a WIRE NUT (F) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
8. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black insulation). Fasten each together with a WIRE NUT (F) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
9. Check the wiring connections and if all looks good, gently tuck the wire connections neatly into the ceiling(wall) outlet junction box.
10. Fasten the Backplate (A) to the Mounting Plate (B) and over the Outlet Box by using the Mounting Screw (C) and Ball Nut (G).
11. Place Metal Shade (H) onto the socket through the washer, and secure shade by threading Socket Ring (I) onto the threads on socket in clockwise direction until tight.
12. Screw one (1) 60W Type B light bulb into the threaded socket and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating level.
13. Restore power to ceiling outlet junction box and test fixture.
14. Installation is complete.

Care Instructions:

- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

# ILLUSTRATION

ITEM #5000-0177

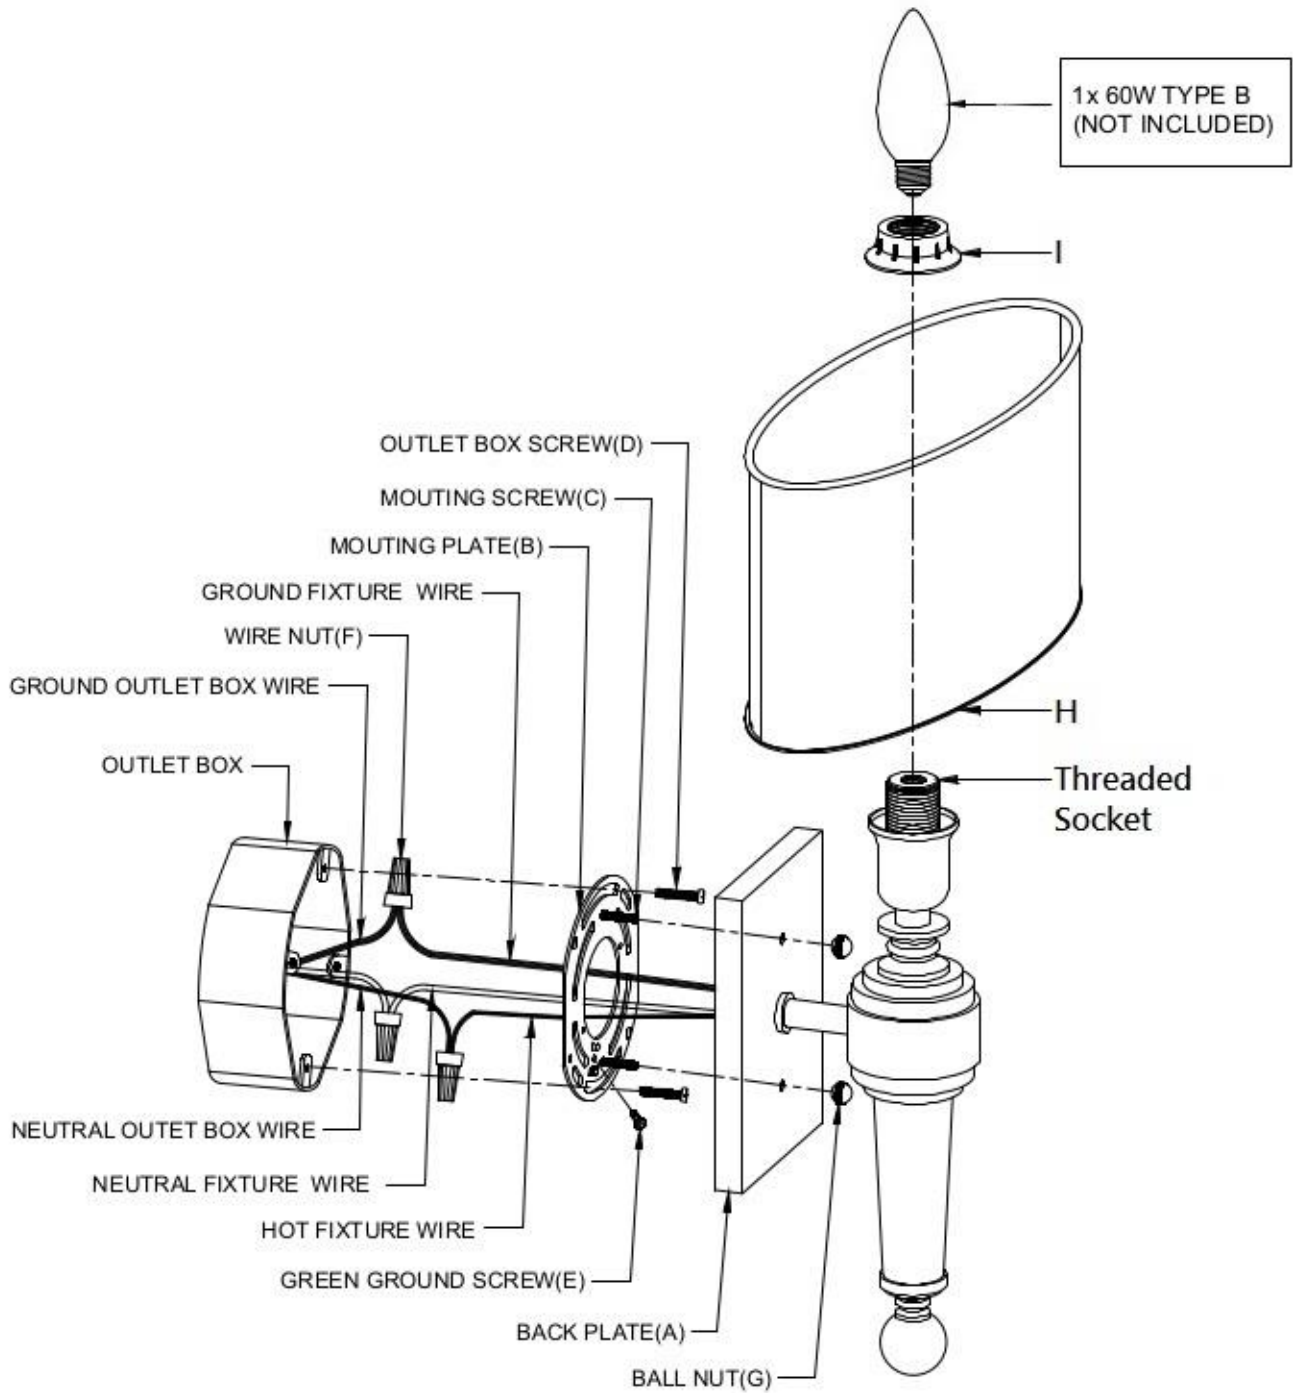

Note: The drawing is for reference only.

[www.curreyandcompany.com](http://www.curreyandcompany.com)

Made in China