

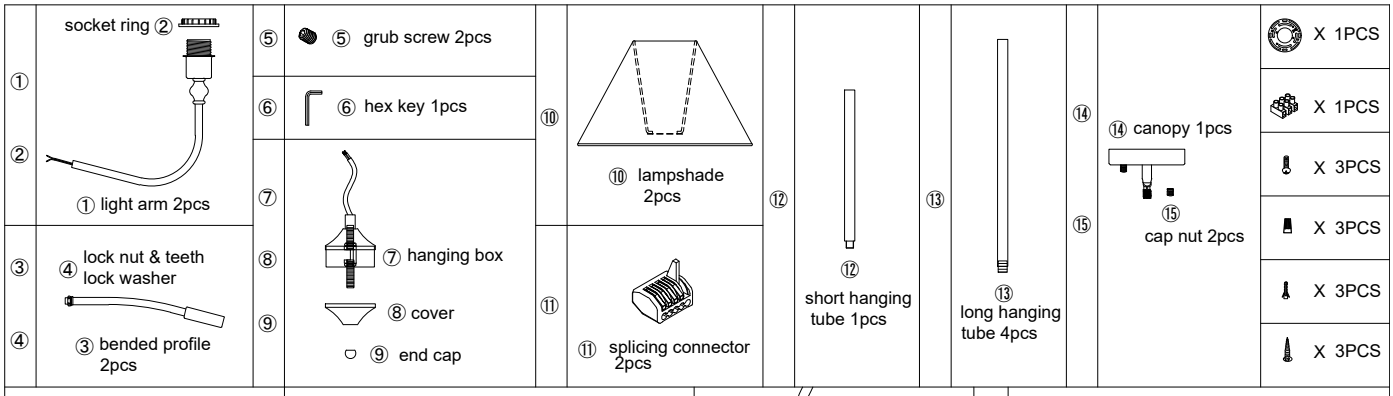


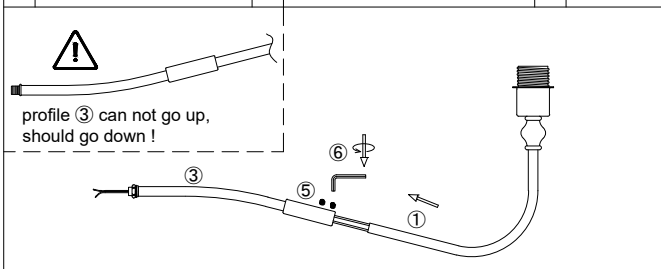


Let the wire of the light arm ① go through the profile ③,adjust it to be straight, fasten it with grub screw ⑤ by hex key ⑥.

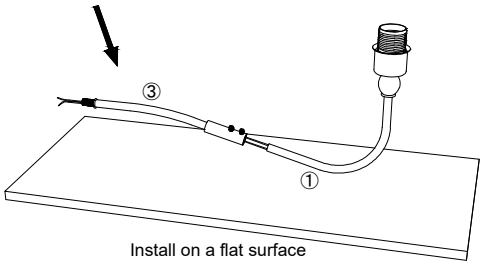

Install on a flat surface


Push the light arm and profile inward to minimize any gaps during installation.


1.Let the wire of the light arm ① go through the profile ③,adjust it to be straight, fasten it with grub screw ⑤ by hex key ⑥.



how to assemble the light arm


1.Pull the orange operating handle A to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.
(Note: one inlet hole can put 2 or 3 wires inside)



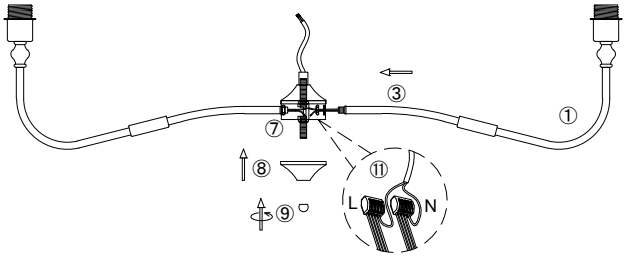

2.Install the light arm ① to the hanging box ⑦ with lock nut & teeth lock washer ④, connect all the wires by parallel with connectors ⑪(all live line-L use one connector, and neutral Line-N use another connector).


3.Close the cover ⑧ to the box ⑦ with end cap ⑨.



can connect more tubes to get the height you need

4.Let the wire of the fixture go through the hanging tube ⑫ and tube ⑬, rotate to install the tubes to the fixture.(can connect more tubes to get the height you need)

5.Rotate to install the canopy ⑭ to the fixture.

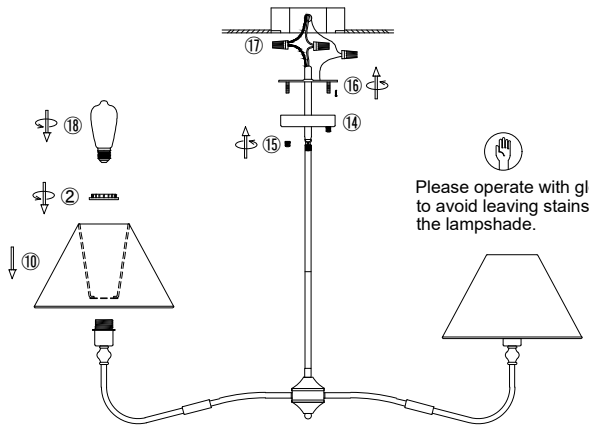

Please operate with gloves to avoid leaving stains on the lampshade.

6.Install the bracket to the ceiling junction box with screw ⑯.
7.Connect the wire to your home line with cap connector ⑰.
8.Install the fixture to the bracket with cap nut ⑮.
9.Install the lampshade ⑩ to the bulb holder with socket ring ②, and install the bulb ⑱. (bulbs are not included in the package)

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !