

TOTO®

MS746124CEMFG

Drake® Close Coupled Toilet, 1.28 & 0.8 GPF

FEATURES

- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- High-efficiency dual flush 1.28 & 0.8 GPF (4.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate a WASHLET®+
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Elongated front bowl and seat
- Universal Height
- Chrome plated trip lever
- 12" Rough-in
- Semi-concealed trapway

MODELS

- **MS746124CEMFG (#01)**
With CEFIONTECT ceramic glaze & includes SS124 SoftClose® seat

COMPONENTS

- **CT746CUFGT40**
Elongated bowl with CEFIONTECT
- **ST746EMA**
Tank and cover only
- **SS124**
SoftClose seat

OPTIONAL COMPONENTS

- **ST746EMR (#01)**
Tank and cover only with right-hand trip lever
- **ST746EMB (#01)**
Bolt Down Tank
- **ST746EMD (#01)**
Insulated Tank
- **ST746EMDB (#01)**
Insulated Bolt Down Tank
- **THU773(#01, #BN, #PN, #CP)-A**
Trip Lever - Cotton, Brushed Nickel, Polished Nickel
- **THU774(#01, #BN, #PN, #CP)-A**
Right Hand Trip Lever - Cotton, Brushed Nickel, Polished Nickel

COLORS/FINISHES

- #01 Cotton



-  **DYNAMAX TORNADO FLUSH**
-  **Universal Height**
-  **CEFIONTECT**

PRODUCT SPECIFICATION

The two-piece high-efficiency DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF/0.8 GPF. Toilet shall be 12" rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl and chrome plated trip lever. Toilet shall be TOTO Model MS746124CEMFG_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MS746124CEMFG


Drake® Close Coupled Toilet, 1.28 & 0.8 GPF

SPECIFICATIONS

Water Use	1.28 & 0.8 GPF (4.8 & 3.0 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/2"
Rough-in	12"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT746CUFGT40 66 lbs.
	ST746EMA 35 lbs.
Shipping Dimensions	CT746CUFGT40 28-1/4" L x 17-1/4" W1 x 10-3/4" W2 17-1/4"H
	ST746EMA 18-3/4" L x 8-3/8" W x 16" H


INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

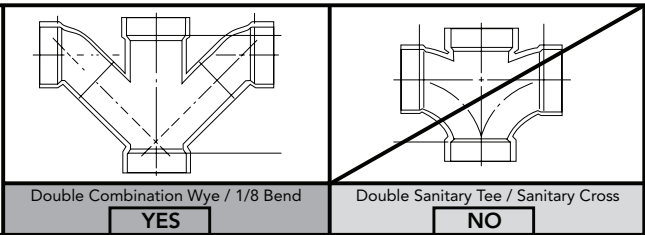

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

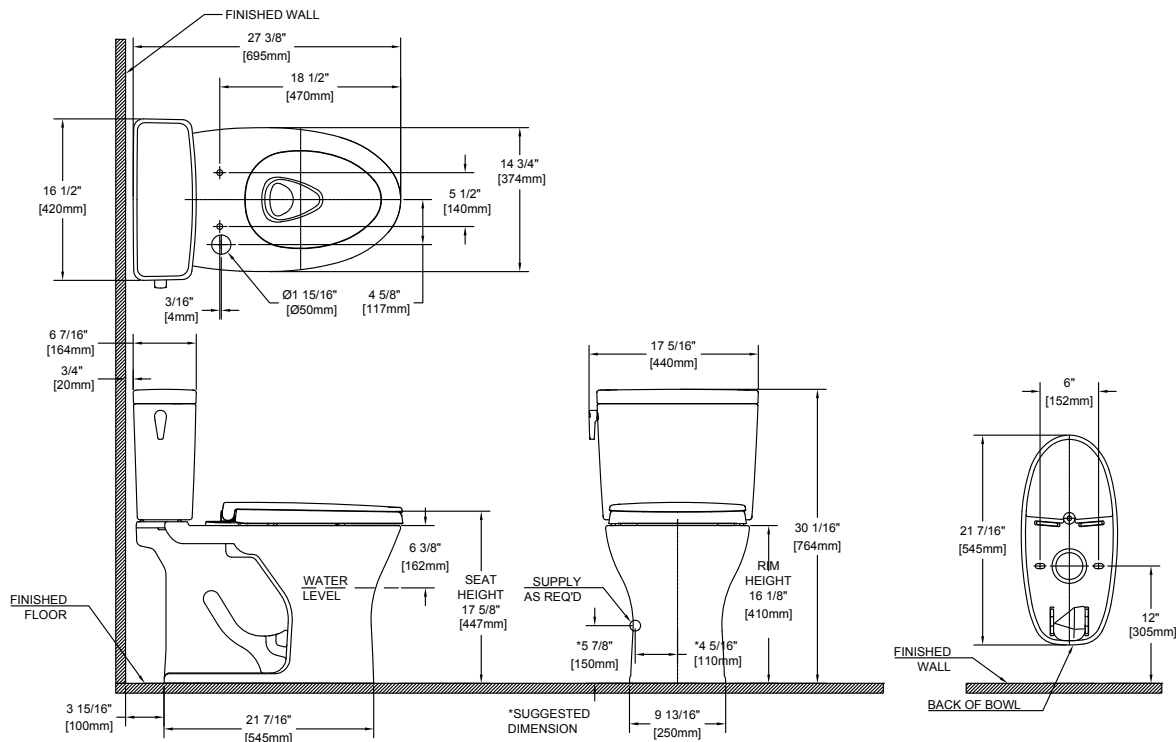

TOTO®

These dimensions and specifications are subject to change without notice