

## NOTICE

- \*Please make sure that you have all parts indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.
- \*This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- \* This item may require periodic tightening.
- \*If you are having difficulty , our friendly Customer Care team is always here to help.

Product Dimensions:27" W x 30" D x 34.5" H








## PREPARATION


- \*Before beginning assembly of product , make sure all parts are present . Compare parts with part contents list and hardware contents list.
- \*If any part is missing or damaged , do not attempt to assemble the product.
- \*Estimated Assembly Time: 10 minutes.
- \*Tolls Required for Assembly (included) : Allen Key

## CARE AND MAINTENCE

- \*Spot clean using a mild water-free solvent.
- \* Only a professional cleaner should undertake a complete overall cleaning.
- \*The use of steam or water-based cleaners may cause excessive shrinking or staining.

### Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Seat Body		1X
B	Left Chair' s Arm		1X
C	Right Chair' s Arm		1X
HW1	Allen bolt : M8 x 1.25 x 45 mm		8X
HW2	Spring Washer : M8		8X
HW3	Flat Washer :M8x22mm		8X
HW4	Allen Key		1X

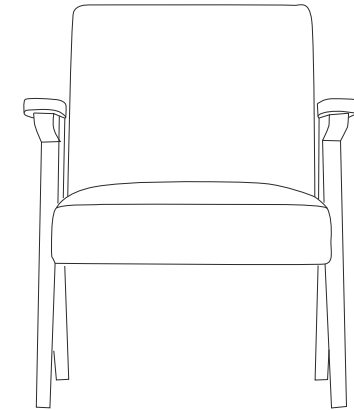


Weight Capacity: 275 lbs

WARNING: DO NOT STAND ON CHAIR


WARNING: DO NOT OVER TORQUE BOLTS/SCREWS

# PREPARATION


- \*Before beginning assembly of product , make sure all parts are present . Compare parts with part contents list and hardware contents list.
- \*If any part is missing or damaged , do not attempt to assemble the product.
- \*Estimated Assembly Time: 10 minutes.
- \*Tolls Required for Assembly (included) : Allen Key
- \*If you are having difficulty , our friendly Customer Care team is always here to help.

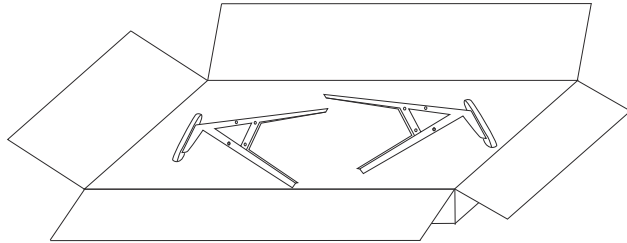


STEP 1: TAKE OUT LEGS AND HARDWARE FROM THE BOX UNDER THE SEAT BODY.




STEP 2: PUT THE WASHERS ON THE BOLT IN THE ORDER SHOWN IN THE PICTURE.

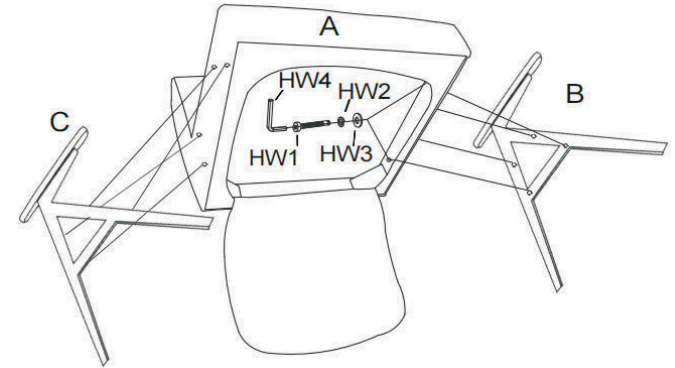

STEP 3: PUT LEFT CHAIR ARM AND RIGHT CHAIR ARM ONTO SEAT BODY .SCREW IN THE BOLTS . BUT DON'T TIGHTEN COMPLETELY.



STEP 4: PUT THE CHAIR UPRIGHT AND MAKE SURE ALL LEGS ARE LEVEL, THEN FIRMLY TIGHTEN BOLTS WITH ALLEN KEY WHILE THE CHAIR IS UPRIGHT AS PICTURED ABOVE.

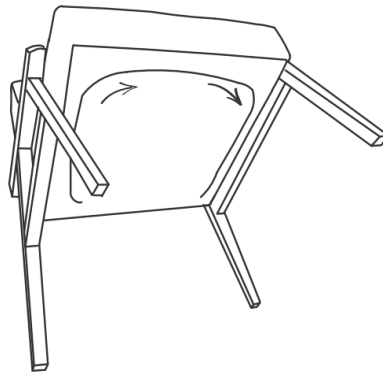

STEP 5: ZIP THE COVER ON BOTTOM OF SEAT. THIS ITEM MAY REQUIRE PERIODIC TIGHTENING.