



Installation Instructions



Draw the position on the ceiling with the hanging board as the reference



Put the hanging plate hole in the ceiling with the electric drill.



Put the hanging plate hole in the ceiling with the electric drill.



Fix the hanging plate on the expansion screw and tighten it with the nut.

Zero line Fire line



Step 5: Hang up the main body as shown in the figure. The main line of the lamp body is connected with the servo-line fire line.

Installation steps

- 1 Install hanging board
- 2 Assemble the light source on the lamp body and screw the lampshade
- 3 Regulating Wiring Length
- 4 Fixed the set-top box and locked the bottom branches of the set-top box



Installation Notes

When installing, scratches should be avoided on the surface and wires of lamps and lanterns, and gloves should be worn when installing. White or red light wiring should be connected with fire line (L), black or blue TV wire line (N), double-color or bare copper grounding line (G). Lamps should not be close to acid, alkali, salt and other corrosive chemicals or gases. They should not be washed with water. They can be wiped with a clean cloth. When the lamp is working normally, the bulb and accessories will produce high temperature. Do not touch it with your hands to avoid the risk of scald. When installing, cleaning lamps and replacing light sources, the power supply must be cut off first. In particular, when installing glass articles, the application force is appropriate to avoid glass cracking.



1-54 Suspension wire + steel ring at both ends +10*14# octagonal beads (black at both ends) +30% crystal bell
100 Each a series of

A1-A8 3 Suspension wire + steel rings at both ends +100# spiked pendant
16 Each a series of

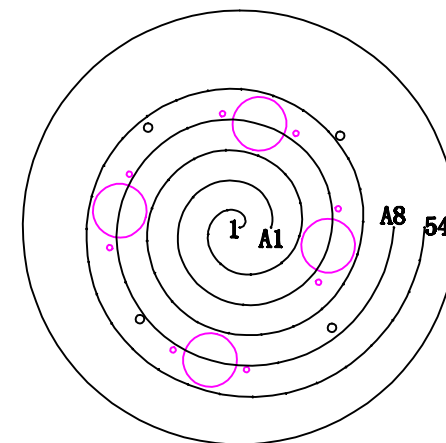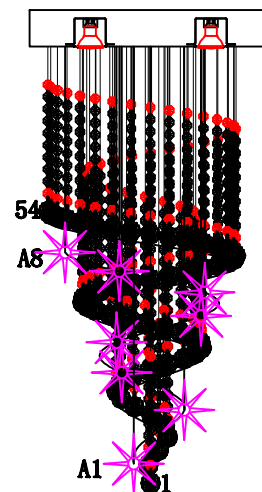

Serial number	Crystal string method	Number
	Crystal star anise beads	