





INSTALLATION INSTRUCTIONS

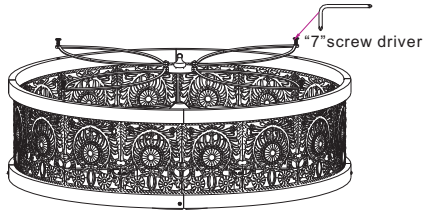


5. Turn the fixture over, loosen the screws on the square tubes, unfold the safety guard, and secure the guard with the removed screws.

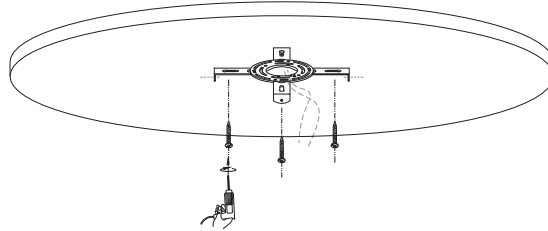


6. Fix the bracket to the ceiling with the supplied screws.

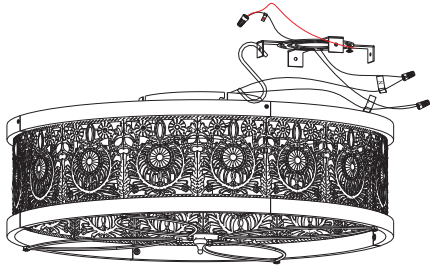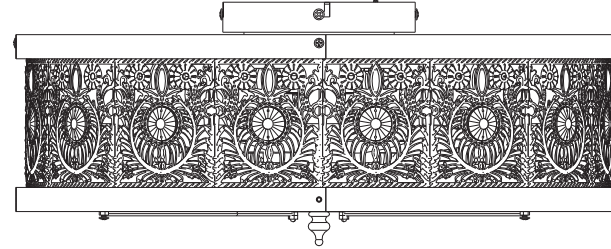

7. With power OFF, connect the controller to the mains L/N supply.

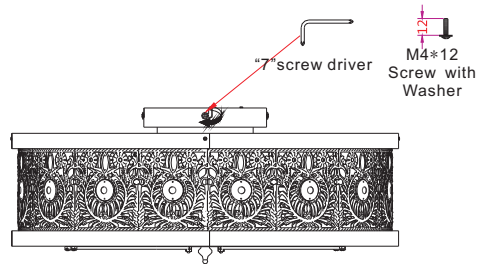

8. Align the side holes of the lamp bracket with those of the ceiling bracket, push the fixture flush to the ceiling, rotate the body so the screws engage the bracket slots, and tighten with M4×12 washer-head screws.

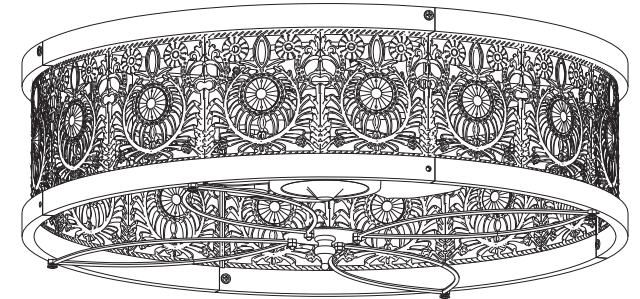

Please scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.




Please scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.




Warning!

1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates only within 110V-265V.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.


Package Includes

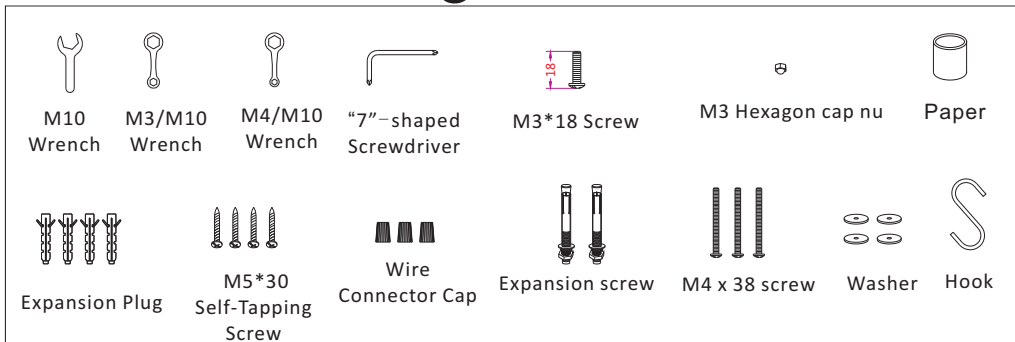


(Accessory kit)




Remote Control




Ceiling Bracket Motor Housing + Square-Tube Arms



Fan Blades



Safety Guard

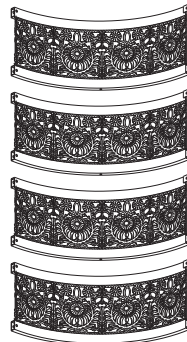


Decorative Rim & Outer Guard Mesh


Installation Steps

Pre-Installation Preparation


Do this first!





Inspect the packaging and prepare the ladder.



Switch Off Power




Install Lamp (Bulb)

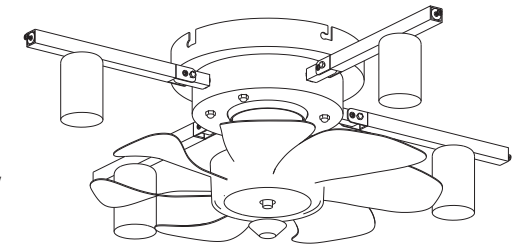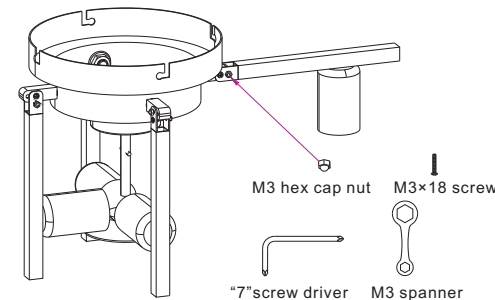


1. Remove the bracket first, extend the square tubes and ensure they are adjusted to be perfectly parallel. Then firmly tighten with M3×18 screw + M3 spanner + M3 hex cap nut + 7° screwdriver. Check that the four lamp-head square tubes are on the same parallel line and securely fastened.

2. Fit the blade and tighten the blade cap by turning counter-clockwise.



3. Place a paper tube under the fan to make the following steps easier and steadier.

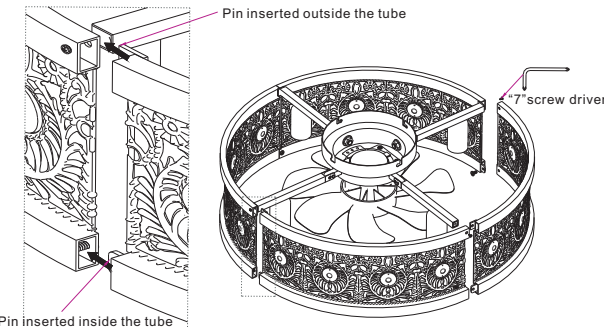

4. First remove the screws on the square tubes, then use those screws to fix the four frames as shown in the enlarged view, and tighten.