


Assembly & Installation Instructions

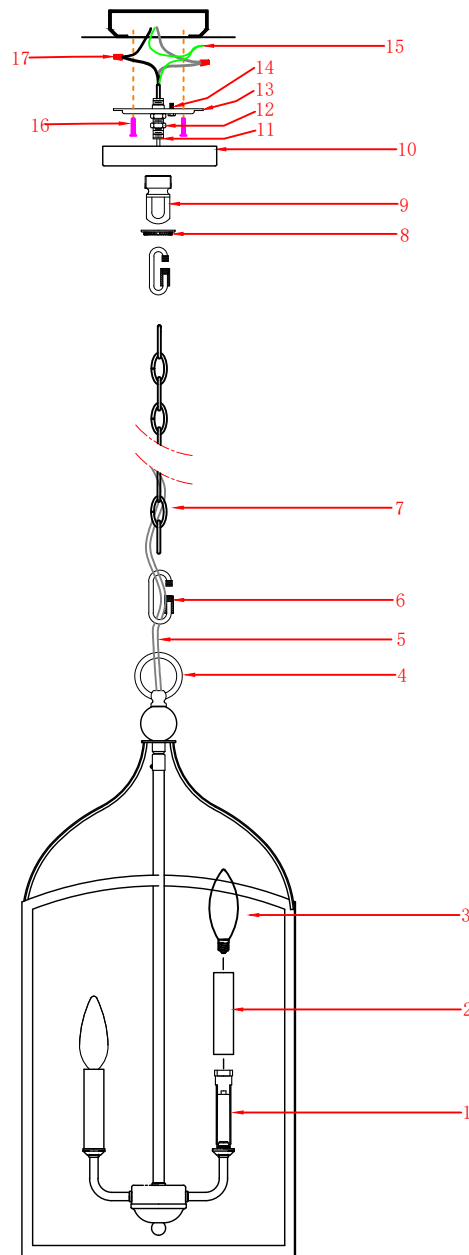

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

- A. Put the lamp sleeve (2) on the lamp holder (1);
- B. Screw E12 light bulbs (3) on the lamp holders (1). For the maximum wattage of the bulb, refer to the warning label on the lamp sleeve (2).
- C. Thread wire (5) through the hanging chain (7) as shown in the figure, and connect the hanging chain (7) and the hanging ring (4) together with the chain buckle (6). The length of the hanging chain is adjustable.
- D. Thread wire (5) through the thread hanging ring nut (8)(used to connect and secure the light), threaded hanging ring (9) and back plate (10) in sequence.
- E. Lock the threaded pipe (11) and decorative nuts (12) onto the mounting plate (13) as shown in the figure. Use one of the decorative nuts to secure the mounting plate.
- F. Pass wire (5) through the threaded pipe (11), install the threaded hanging ring (9) on the threaded pipe (11), and tighten it with the decorative nut (12).
- G. Use mounting screws (16) to firmly attach mounting plate (13) to junction box.
- H. Use the wire cap(17) to tightly connect the black wire in the back plate to the black wire in the junction box. Similarly, connect the white wire in the back plate and the junction box. Make sure no bare wires are exposed to prevent electric leakage. Fix the ground wire of the lamp body (15) and the external ground wire to the mounting plate (13) with the green screw (14).
- I. Place all wires neatly into the junction box. Pass the back plate (10) through the threaded hanging ring (9), and fix them with the thread hanging ring nut (8).
- J. Use the chain buckle (6) to connect the chain (7) to the threaded hanging ring (9), and finally push the excess exposed wires into the junction box.