




STEP 9 Assemble the Legs (F) to the Middle seat frame (C).

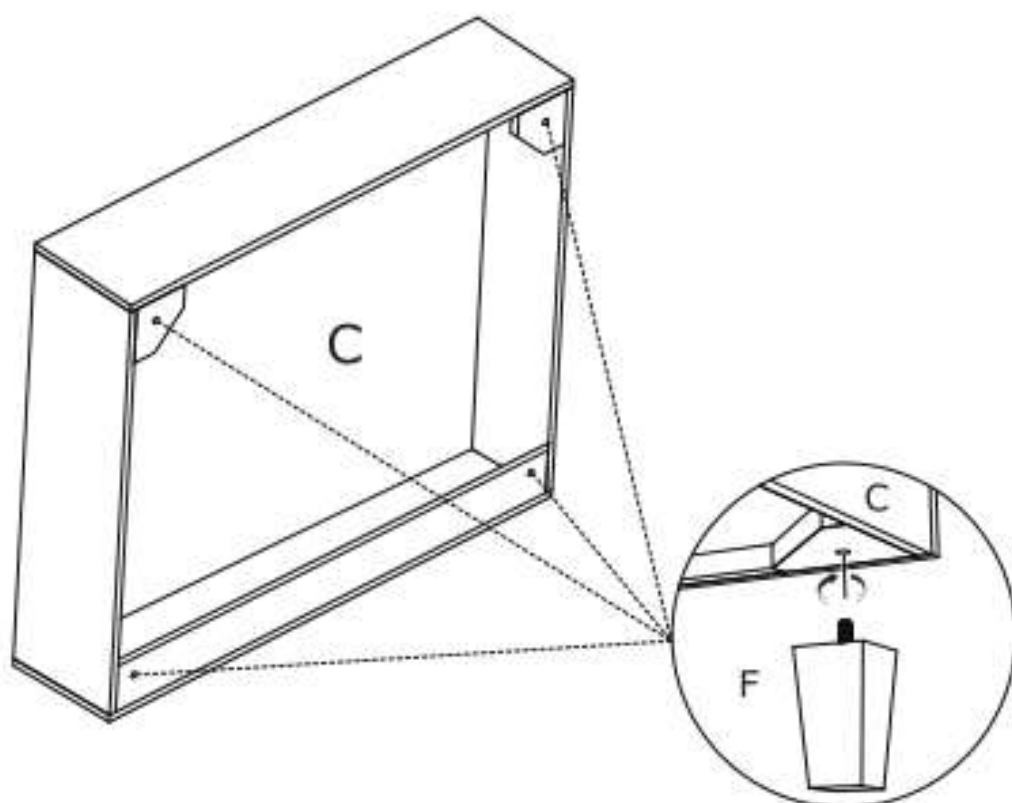

STEP 10 Insert the Middle seat frame cover (Q) into the Middle seat frame (C).

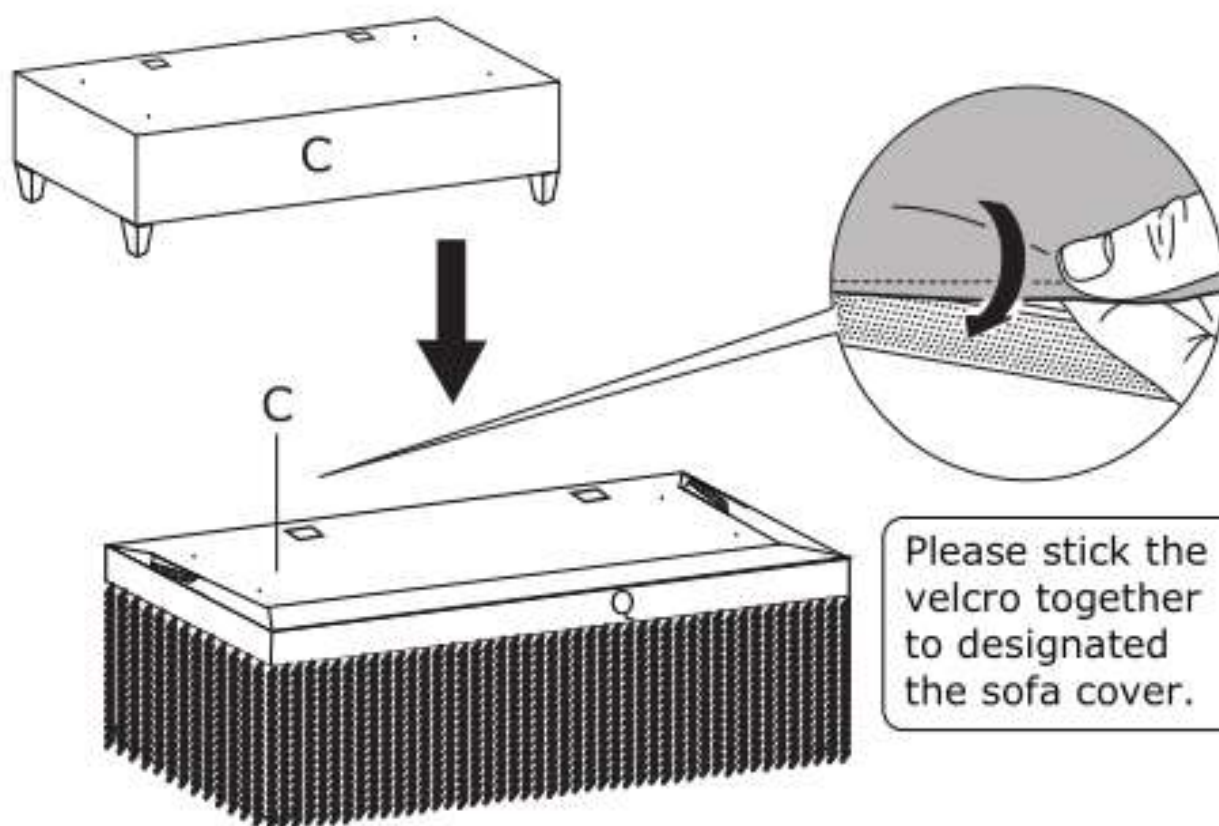

STEP 11 Insert the Backrest (H) into the designated holes, using Washers (T) and Bolts (R) to 70% tightness, and then tighten all bolts on the seat.

