

Figure 1.

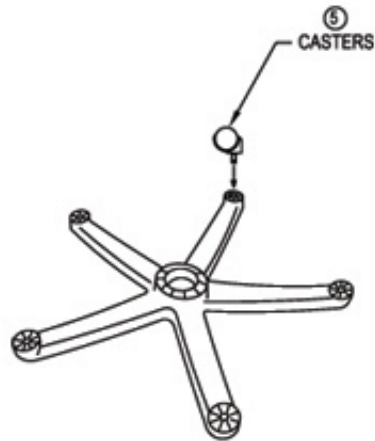


FIGURE 1.

Figure 2.

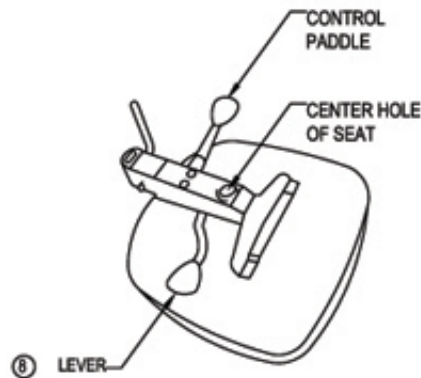


FIGURE 2.

Figure 3.

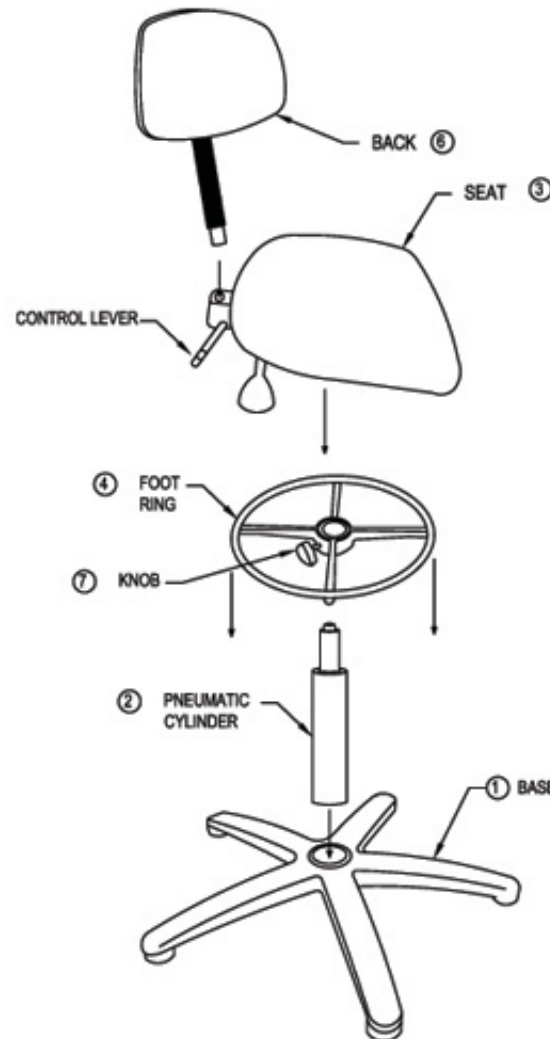


FIGURE 3.

Thank you for your PERCHase! ASSEMBLY INSTRUCTIONS: CHAIRS

- 1) Remove base, pneumatic cylinder, seat, foot ring (if included) and casters from box.
- 2) Place base (1) upside down and insert casters (5) (see figure 1).
- 3) Flip the base so casters are on the floor and insert pneumatic cylinder (2) as shown in (figure 3) into center hole of base with green button up. Lightly push down.
- 4) If you have a footring (4) slide it over the pneumatic cylinder (2) and tighten knob (7).
- 5) Align the center hole of the underside of the seat assembly (3) with the top of the pneumatic cylinder (2) and lightly push down. With the weight of your body, carefully sit on the seat. This will press the base, pneumatic cylinder, and seat together. Underside of seat is shown in figure 2.
- 6) On the back assembly (6) depress the spring-loaded button with your finger, lift the control lever and insert the bar into the control channel of the seat (3).
- 7) Adjust the seat back to the desired angle using the control paddle located on the right side of the seat. You can adjust the height of the back by lifting the control lever up. Push the control lever down to lock the bar in place.
- 8) To raise the height of your chair simply pull up on lever (8). No force is required and you must have your weight off of the seat.
- 9) To lower the height of your chair you must be seated with your weight on the seat, lift up on lever (8).
- 10) Get on it! Enjoy!