

LED Mirror Installation



Features Anti-fogging/Dimmable light/Memory function, our mirror is designed with customer's demand and it comes with 1 year warranty. Perfect choice for your bathroom, bedroom and makeup room.

► We strictly implement quality control to ensure that the products are 100% safe and qualified. If there is any problem when you receive the mirror, please feel free to contact us by email

A If you are satisfied with our products, please share them with your friends

We look forward to your comments and video feedback as well as your suggestions for us

CONTENTS

Product Introduction P5

Product Structure P5

Functions of Mirror Surface P6

Product Parameter P8

Product Installation P8

Warm Tips before Installation P8

Square Bathroom Mirror Installation P9

CONTACT US P10

Wiring Method P11

Warm Tips P12

Fault Isolation Manual P12

Before Installation P13

Care Instructions P15



MIRROR SHOWING TRUE SELF
MEET THE BEAUTIFUL YOU

01 Product Introduction

Product Structure



1



3

2


3

Rectangle shape

- 1 On/Off Switch - Short press the button for On/Off and color temperature adjustment. Long press to adjust brightness
- 2 Power line plug
- 3 There is only one aluminum strip in each package. Mirrors can be hung horizontally or vertically (Only available for some models of mirrors)

01-1 Functions of Mirror

On/Off Button - Brightness control and adjustment

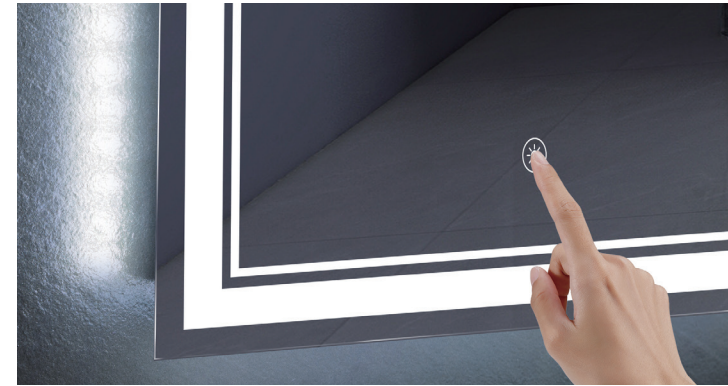

- Short press the button for On/Off and color temperature adjustment. Long press to adjust brightness.

01-2 Brightness Adjustment

Long press the switch button to adjust the brightness of the light




brightness 10%



brightness 100%

Color Temperature Adjustment

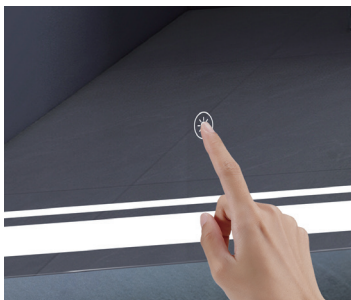


☼ Short press the button to adjust the white/warm white/warm color lighting



White



Warm White

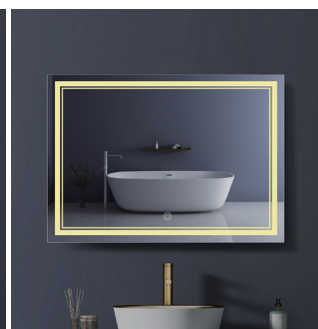

Warm

02 Parameter

Details


Product Name	Specification
Watt Range	18w-72w
Operating Temperature	-20℃ to 50℃
LED Light Tempereure	3000K to 6000K
Input Voltage	100-240V
Output Voltage	12V
Product Certification	UL CE CCC SAA ROHS
Waterproof Rating	IP44
Service Life	>20000HRS
CRI	≥p 90Ra

03 Product Installation

Installation Precautions

1. When installing the bathroom mirror, please first pick up the mirror and confirm the best installation height, then drill holes for installation.

2. Make sure your face is in the middle of the mirror to get a better image.

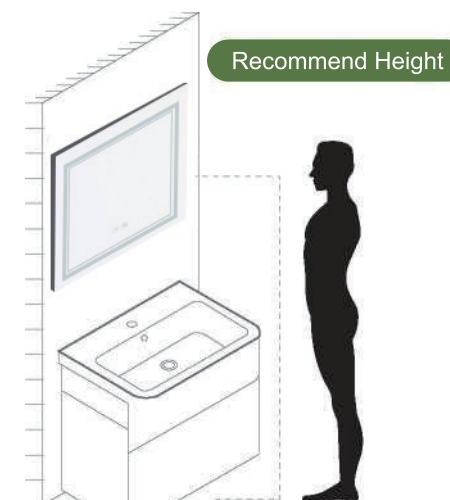

03-1 Square Bathroom Mirror Installation


Tools to be prepared




1. Confirm mirror size




2. Measure the best installation height with a tape measure

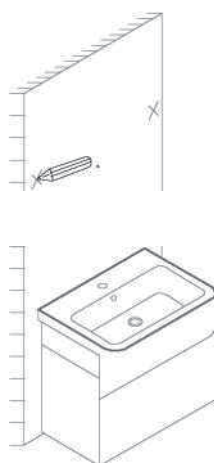


3. Mark the wall with a pencil according to the distance between the two screw holes of the aluminum hanging bar

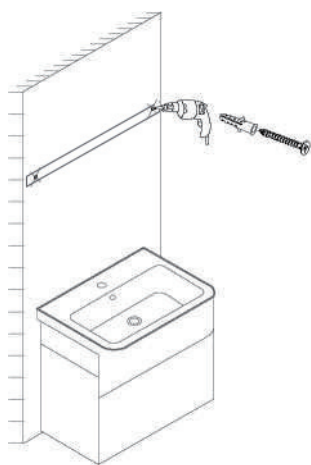

4. Secure the aluminum hanging bar with screws

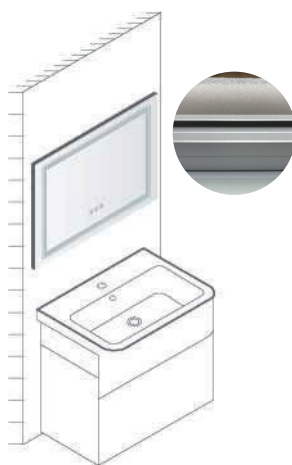

5. Hang the aluminum profile on the back of the mirror on the aluminum hanging bar

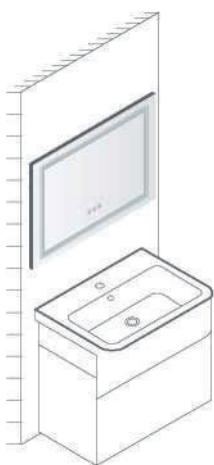

6. Hang up the bathroom mirror.

03-2 CONTACT US

Note: After opening the package, please check the product immediately for any damaged or missing parts in transit. If there is any missing, Please contact us by Our Store or you can contact us at by following these steps:

•Open "Orders"


-Find the product you have purchased and open the product page

•Click Sold by Our Store -Click"Ask a question"


•Click "The order I have placed"

•Click "Your product" -Click "Other" -Click "Troubleshooting" Then you can send us messages, we will reply within 24 hours.

Packing List

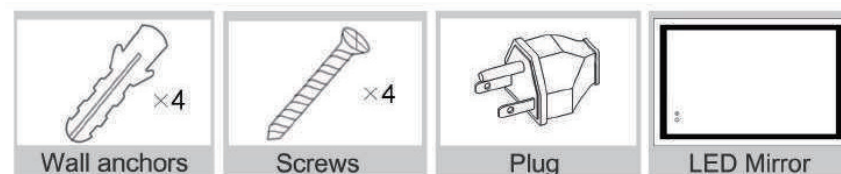

Installation Tools Uncluded

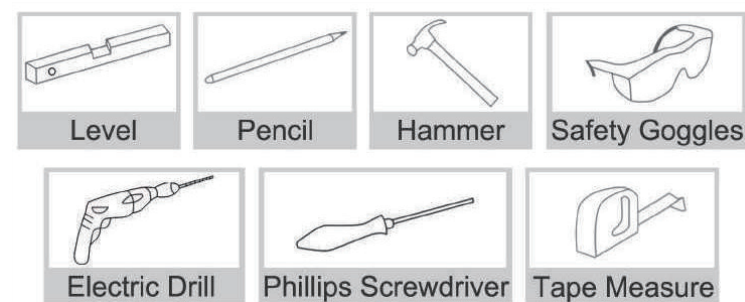

⚠ Note: Before the installation, please keep the silicone corner protector, After the installation is completed please remove the silicone corner protector.

04 Wiring Method

Method 2



Reserved Wire

Cut off the plug of bathroom mirror with scissors and connect the reserved thread.


	Australian	American	European	British	Japanese
Live Wire					
Neutral Wire					
Earth Wire					No Earth Wire

05 Connect the Power

Wires to standard switched lighting circuit or plug.If you want to connect power wires to plug, you can refer to the steps:


- ① Remove the plug cover.
- ② Unscrew the screws on each of the plug's pins.
- ③ Insert the twisted copper wires into the holes in the pins.
- ④ Tighten the small screws on each pin of the plug.
- ⑤ Make sure the wire is tightly clamped by the brake or clip.
- ⑥ Replace the cover of the plug

The principle is the same for other power connection methods.



06 Warm Tips

- 1.When wiring, pay attention to the electrical specifications and use waterproof tape for operation.
- 2. The defogging film will automatically power off after 1 hour.
- If you have any suggestions or advice, please feel free to e-mail our customer services.

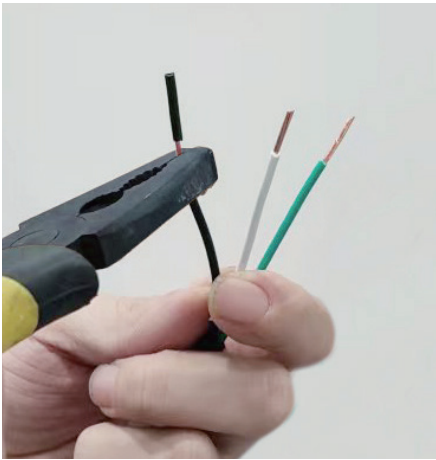

07 Fault Isolation Manual

Fault	Status	Fault Isolation	Solutions
Switch on,but the light is out of work	The touch switch doesn't work	LED driver go wrong	Change the LED driver
	The touch switch work	A.Poor contact at the switch base	Replace the switch pedestal
		B.Poor contact between the led strip and terminal connection	Rewire again
		C.LED strip damage	Replace the LED strip
Thermal fuse doesn't work	The touch switch work	Needs to wait for 3-5min, the thermal fuse area can be heating	Normal
		The thermal fuse get damaged if there is still no heating effect after 5 min	Change the thermal fuse

08 BEFORE INSTALLATION

Thank you very much for using our products, in order to facilitate the use of our products, please read these instructions carefully before you start the installation.

1.Important Safety Instructions:

- Please read all instructions carefully before assembling the item.
- It is highly recommended to be assembled by two or more adults.
- To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.
- Disconnect power before installing, adding or changing any components.
- Ensure that the fixing location is able to take the weight of the complete fitting, (solid stone / brick walls).
- To prevent injury, the mirror must be installed according to these instructions.

2.Pre-assembly:

- After opening the package, please check the product immediately for any damaged or missing parts in transit.
- Keep the voltages between 100V and 240V. If the voltage exceeds 240V, please use transformer.
- You can connect the wires directly to your junction box or the plug.
- Do not remove the transparent silicone protector before completing the installation.



3.Before installation, please check if the mirror is working properly :

After connecting the power, the two round buttons will turn white. At the moment the LED and anti-fog function are already turn on automatically. If you don't need to use any one of them, just touch it to turn it off, then the button will be dimmed.

Memory Function : The status of two buttons will have been memorized in the mirror. The next time you open the mirror, it will be in the same state it was in before you last closed it. This means you don't have to touch the button every time.

09 USE AND CLEANING INSTRUCTION

⚠ In order to keep the LED mirror look perfectly, we suggest using and cleaning the mirror regularly.

- 1.Please use in safe voltage range. (100V-240V)
- 2.Use electrical tape to wrap around the wires to prevent leakage.
- 3.Do not strike mirror glass with hard or pointed items.

⚠ When cleaning the mirror, please observe the following procedures.

- 1.It is recommended that the product is cleaned with a soft, non abrasive cloth.
- 2.Do not use irritating cleaning agents or abrasive materials on any type of finished surface.

Please use the any following cleanser to remove the dirt.

☒ Gentle liquid detergent.

☒ Colorless cleanser.

★ Product Warranty

Manufacturer warranty for 1 year from date of purchase.