


# Instruction Iron Swing



## Pieces Included:

- (1) Bench Back
- (1) Bench Seat
- (2) Right Arm and Left Arm
- (2) Chains

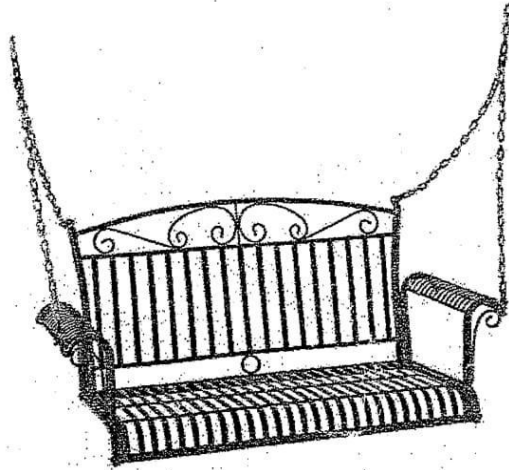

(2)



(6)



(1)



(1)

## Assembly

1. Stand bench seat upright and attach bolts to arm, only tighten by hand. (the loops for the chains should be placed outside)
2. With the bench seat still upright, place the bench back and attach hex nut to back of bench back. Use hex wrench to tighten all bolts, and use nut wrench to tighten hex nuts.
3. Repeat procedure for opposing side
4. Take chains and unscrew u-bolt at the end of the chains. (the longer chain extension is for the seat)

**NOTE: BE SURE THE CHAINS HOOKS ARE ATTACHED TO AN APPROPRIATE SURFACE ABLE TO HOLD THE WEIGHT OF TWO ADULTS.**

5. Enjoy.

