

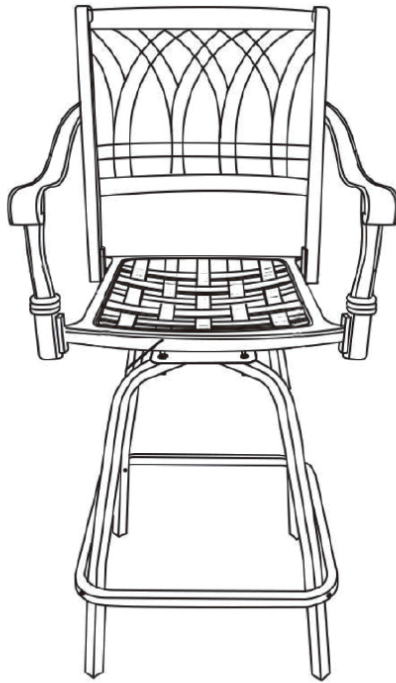


INSTRUCTION MANUAL

Cast Aluminum Swivel Bar Stool






Part Number	Images and Sizes	Qty.	I	 M8	20	R	 M8*35	4
A		2	J	 M8	20	S	 M8	4
B		2	K	 M6	24	T	 M6	8
C		2	L	 M8*35	8	U	 M6	8
D		2	M	 M6*55	8	V	 M8	20
E		2	N	 M8*40	8	W		1
F		2	O	 M6*16	16	X		1
G		2	P	 M6*40	8	Y		1
H		2	Q	 M6*30	8			

ASSEMBLY INSTRUCTIONS



CAVEAT

Note: Please only tighten any bolts once all bolts are placed correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

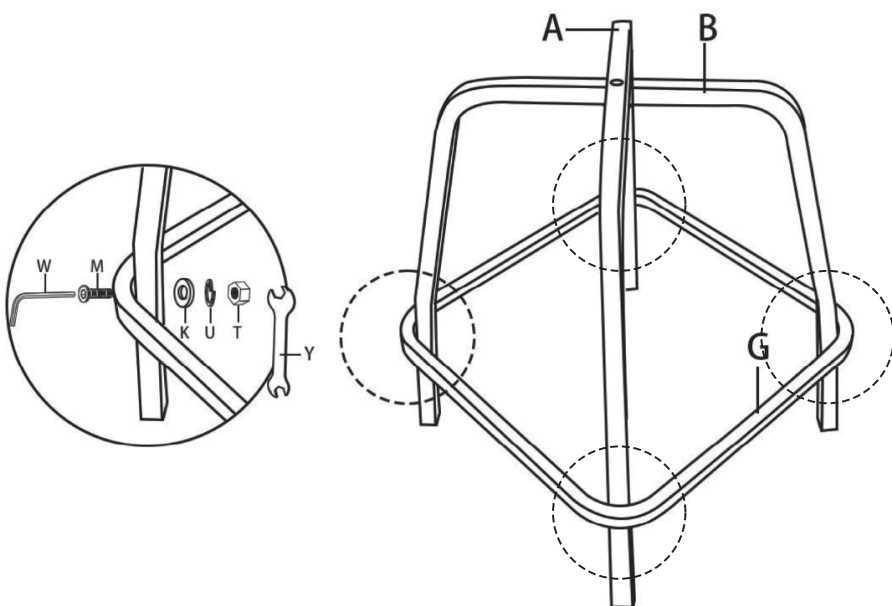

STEP 1


1. Place 2 legs (A&B) in a cross pattern.
2. Attach foot pedal (G) to legs (A&B) using 4 bolts (M), 4 washers (K), 4 spring washers (U) and 4 nuts (T). Do not over-tighten them.

ASSEMBLY INSTRUCTIONS




CAVEAT

Note: Please only tighten any bolts once all bolts place correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

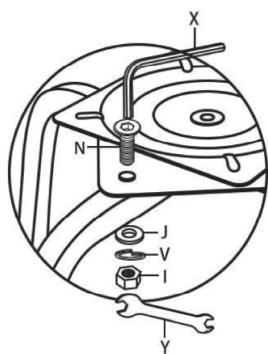

Notice: H can be rotated. If you don't have enough room to you can rotate the H so that the holes are install the screws, in the middle of the gap between the two legs and install the screws.

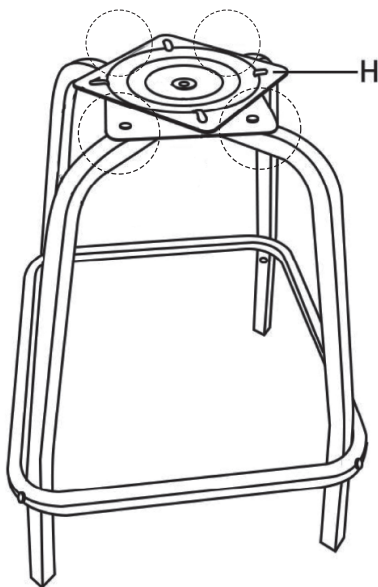

STEP 2


Attach turntable to legs (A&B) using 4 bolts (N), 4 washers (J), 4 spring washers (V) and 4 nuts (I). Do not over-tighten them.

ASSEMBLY INSTRUCTIONS



CAVEAT

Note: Please only tighten any bolts once all bolts place correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

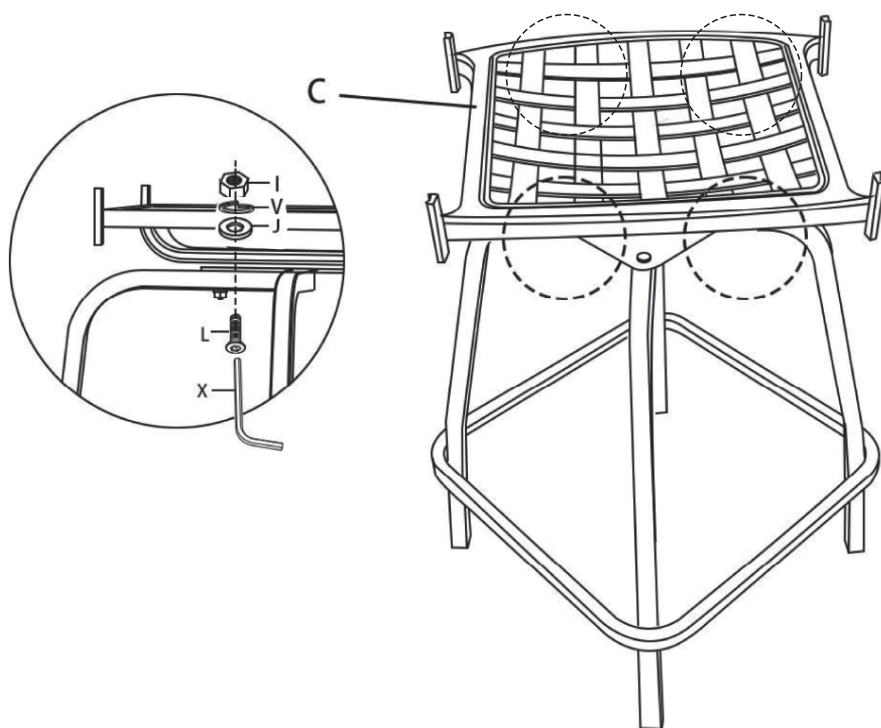

STEP 3


Install the seat (C) using 4 bolts (L), 4 washers (J), 4 spring washers (V) and 4 nuts (I). Do not over-tighten them.

ASSEMBLY INSTRUCTIONS



CAVEAT

Note: Please only tighten any bolts once all bolts place correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

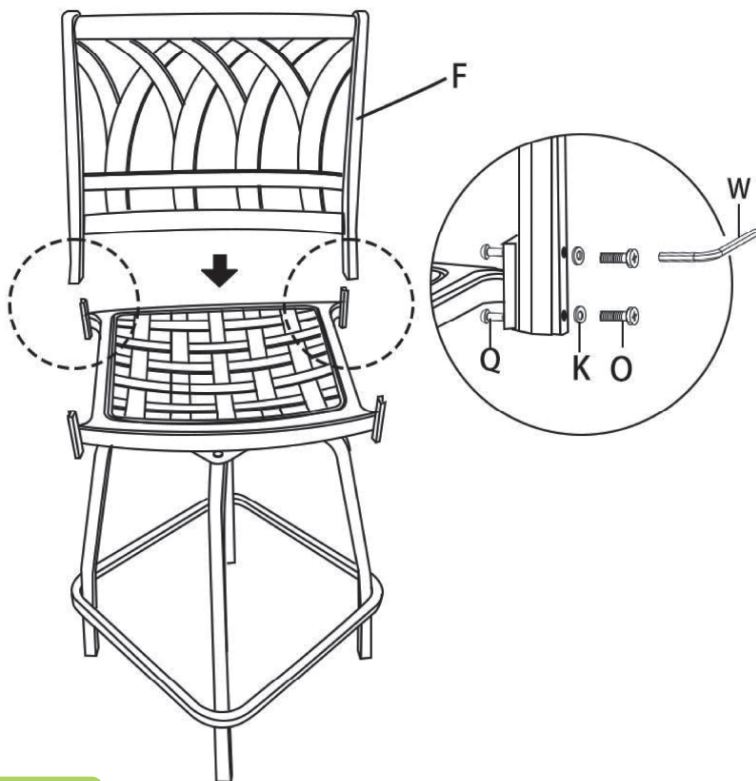

STEP 4



Attach backrest (F) to the seat (C) using 4 bolts (O), 4 washers (K), 4 bolts (Q). Do not over-tighten them.

ASSEMBLY INSTRUCTIONS



CAVEAT

Note: Please only tighten any bolts once all bolts place correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

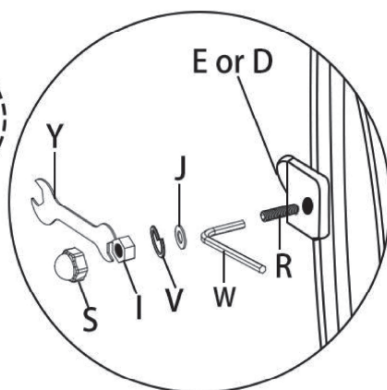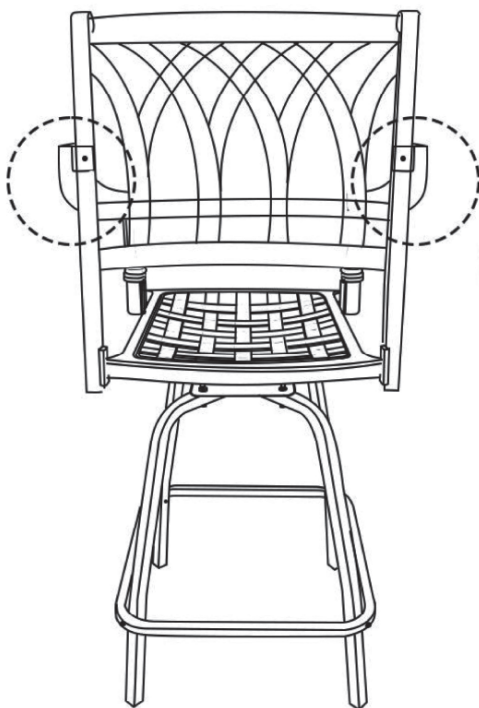

Tip: R: hollow end facing outwards

STEP 5


Attach 2 armrests (D&E) to backrest (F) using 2 fasteners (R), 2 washers (J), 2 spring washers (V), 2 nuts (I) and 2 nut caps (S). Do not over-tighten them.

ASSEMBLY INSTRUCTIONS



CAVEAT

Note: Please only tighten any bolts once all bolts are placed correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

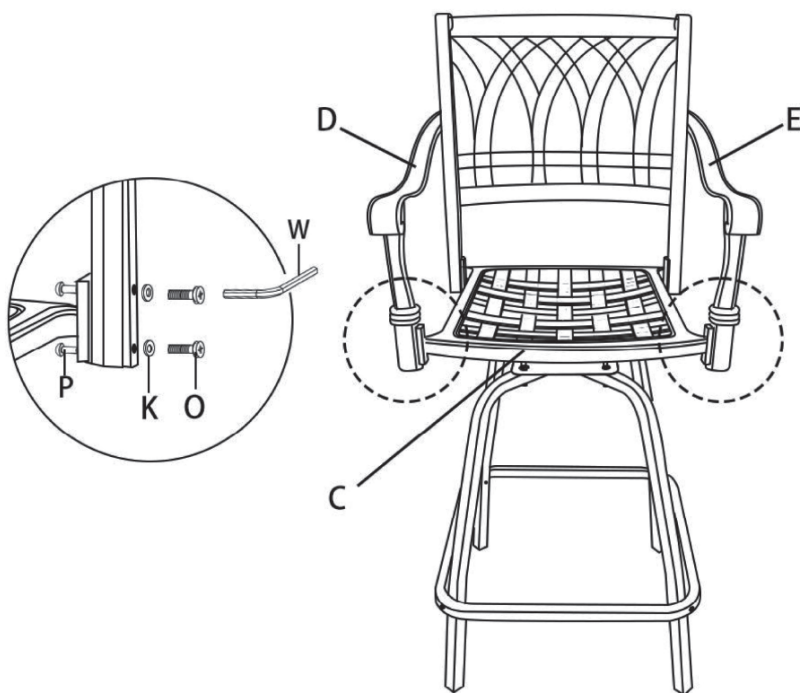

STEP 6

Attach 2 armrests (D&E) to the seat (C) using 4 bolts (O), 4 washers (K), 4 bolts (P). Do not over-tighten them.

Upon completing the entire assembly and bolting up, you can tighten down all screws.

CARE AND MAINTENANCE

Follow the instructions for the product's material to ensure it stays in the best shape as long as possible. The information below is a general guideline.

Don't hesitate to get in touch with us to learn more.

- Only rinse it thoroughly with clean water to wash away dirt and grime. Never use abrasive cleansers on the furniture since they can attack the surface and leave behind scratch marks.

- For stubborn grime and stains, use a soft sponge and mild soapy water.

Then dry it with a cloth or paper towel.

- Check the stability of the screws, nuts, and nut caps before each use.

Then, tighten them up after one to two months' use whenever required.

- Avoid improper use, and be careful not to scratch or damage the surface with sharp objects.

- When you move your furniture, lift it rather than pulling or pushing it to avoid damaging the floor, legs, and mounting.