
8 Drawer Tool Chest

ASSEMBLY INSTRUCTIONS

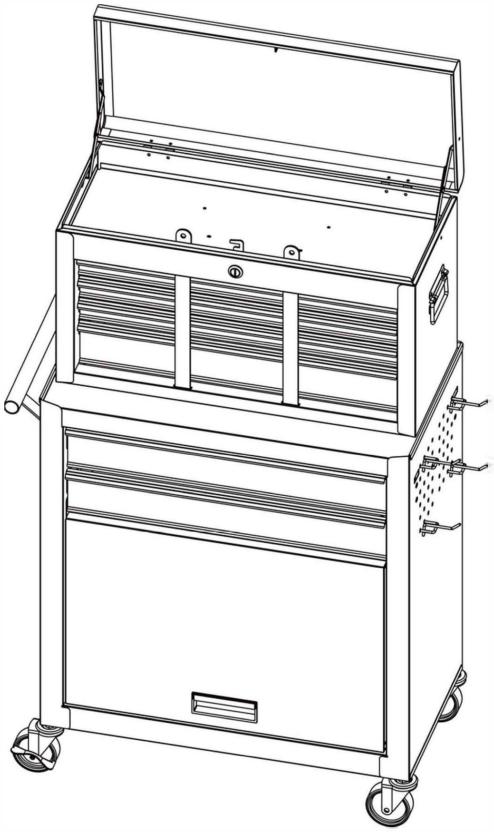

Please check the number of parts in the following accessory catalogue when unpacking. We have sent you more small parts for spare. If there is any missing or any questions about the installation. Please feel free to contact us. We will reply within 24 hours.

CARE AND MAINTENANCE

- Clean the item with a damp cloth and a mild detergent.
- Never use solvent, alkaline or acidic cleaning products as this can damage the surfaces of your tool box.
- DO NOT allow water and other fluids to remain on the work bench for any length of time.
- DO NOT OVERLOAD! The product has a maximum weight capacity of 330lbs.

⚠ ATTENTIONS


- Need two or more people to move, assemble, and install the product to avoid any injury.
- DO NOT leave children unattended near the product.
- DO NOT stand on the product or lean on the drawers or worktop.
- WEAR SAFETY GLASSES when removing or repositioning the slides. The tools could slip, which may cause personal injury.
- DO NOT alter the product in any manner. For example, do not weld external lock bars or attach unapproved electrical equipment. This may cause product damage, personal injury, or death.
- BE CAREFUL when opening more than one drawer. The product could become unstable and may tip, which may cause product damage or personal injury.
- High risk of tipping if the product is not installed correctly. Securely attach the product to the wall to avoid serious injury.
- We recommend wearing gloves during assembly.
- Do not deform parts by forcing during assembly.

Matters about the use of drawers

The stability of this item is primarily ensured by the proper distribution of the loads placed inside and in the drawers. To avoid any risk of tipping, here are some rules to respect:

- Place the heaviest loads in the lower compartment.
- Do not place any load in the upper drawers if there in no load in the lower compartment.
- Do not overload drawers, especially top drawers.

Sliding Drawers

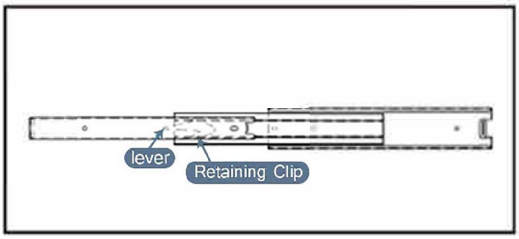


The ball slides have black retaining clips.
To remove a drawer, simultaneously release these clips by pushing up the right slide and down the left slide. Pull the drawer completely and take it out. To reinstall the drawer, replace it on its slides and push it completely.


⚠ NOTES


- Lubricate the top and bottom channels of the drawer slides at least twice a year.
- Do not open more than one loaded drawer at a time.
- The maximum loading capacity is 330lbs.


ACCESSORY CATALOGUE

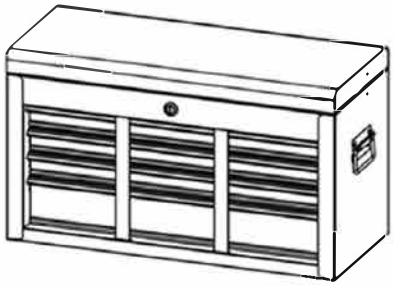Item no.	Description	Qty.
1		1
2		2
3		2
4		4
5		4
6		1


ACCESSORY CATALOGUE

Item no.	Description	Qty.
7		4
8		1
9		1
10		1

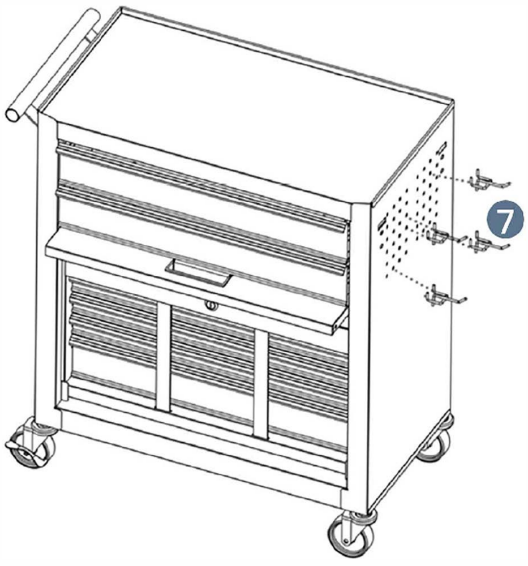

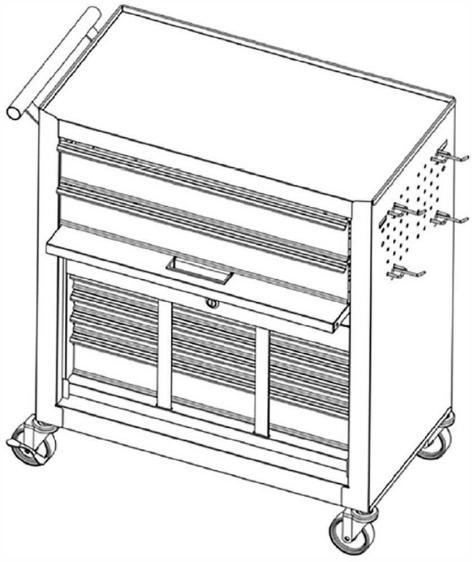

1.Removal of Assembly

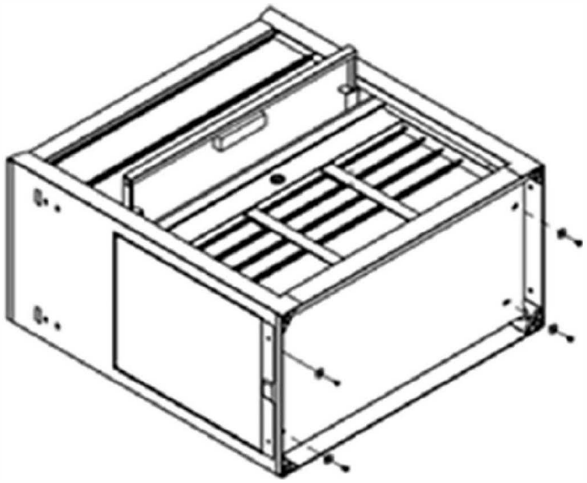

Place the cabinet on the back on a horizontal surface.


Unscrew the 4 bottom screws with a screwdriver.


Keep these screws for future use.

2.Take Out Top Part


Place the cabinet on a horizontal surface and gently pull the top part outside.

Then fix the side panel with the 4 supplied screws with a screwdriver.

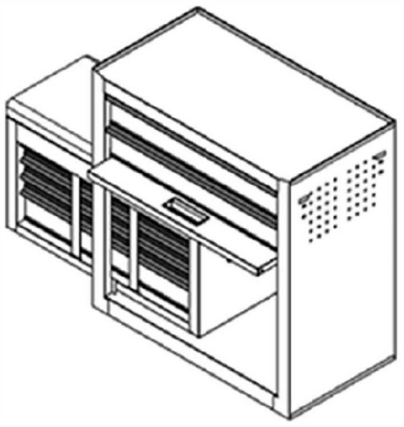

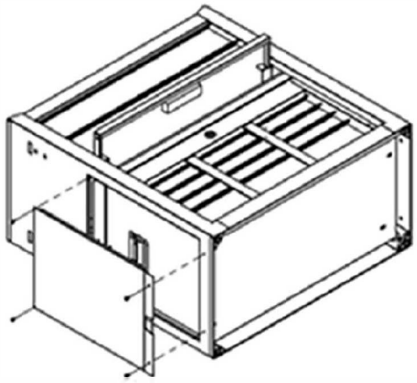


3.Assembly of Caster

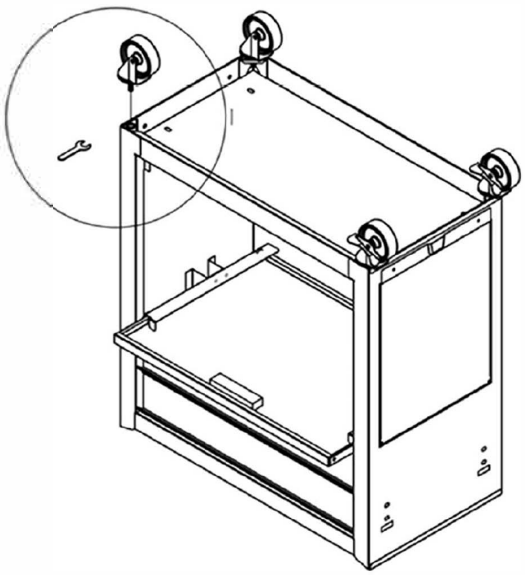

Insert the wheels into the bottom rivet net of the cabinet.

Tighten clockwise with a spare wrench.

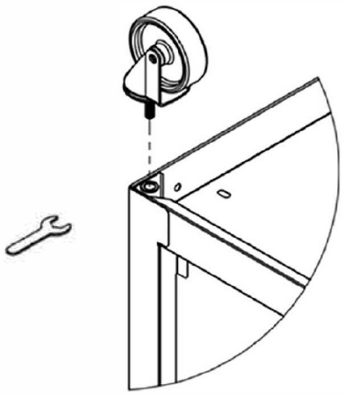


Two Casters With Brakes

Lock




Un lock




Locking System


Lock

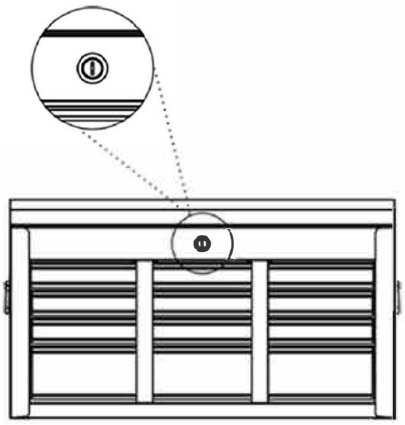


Open

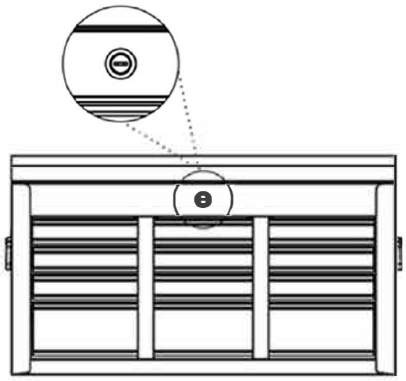

Drawers

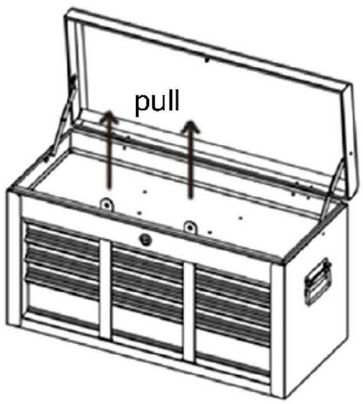

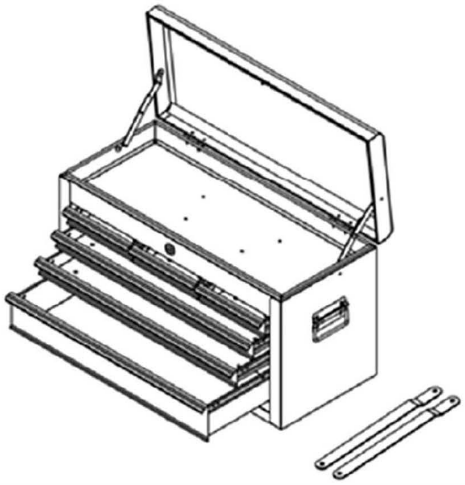

To unlock the drawers, open the tool chest. Using the key if it is closed. Then pull the drawers. To block the drawers, replace the posts and close the trunk.