



LDC473 LDC474 LDC475 LDC476 LDC477

USER MANUAL LED RECESSED SPOTLIGHT

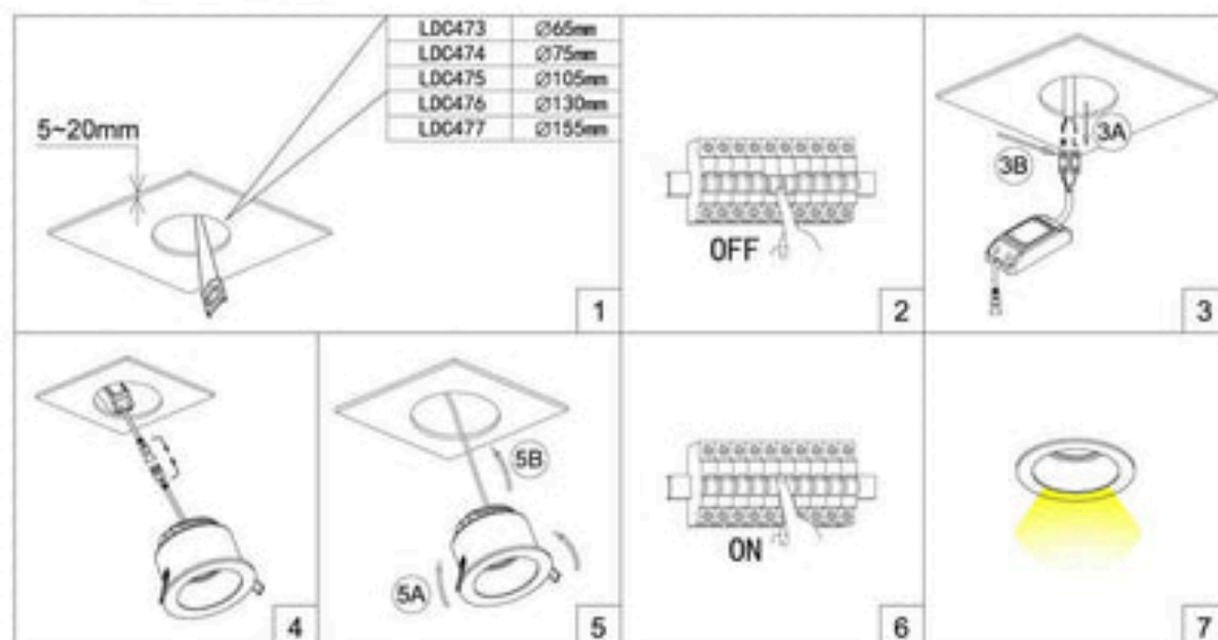

01. MAKE HOLE PATTERN
02. SWITCH OFF MAIN
03. CONNECT POWER-SUPPLY TO THE MAIN
04. CONNECT LAMP TO POWER SUPPLY
05. HOLD SPRINGS
06. PUT LAMP INTO CEILING
07. SWITCH ON THE MAIN AND LIGHT ON

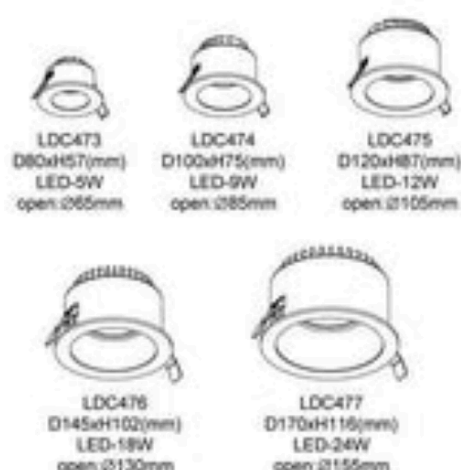

Lamp: CREE COB LED
 Color: 2700K/3000K/4000K/5000K
 Color rendering: Ra90
 Input: 220V-240V AC
 Current: Constant 500mA/250mA/300mA/
 450mA/600mA
 Frequency: 50/60Hz
 Watt: 5W/9W/12W/18W/24W
 Life span: 20,000hrs
 Operating temp: -20°C-+40°C
 Indoor use only
 IP20
 Dimmable: NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied
 by manufacturer for products guarantee