

### Features

- Brass construction
- Fixture-mount design
- Intended for urinal installations with 3/4" spud coupling connection
- Non-hold open piston technology for accurate activation
- Retrofit model requires a control stop and vacuum breaker
- 0.125 gpf (0.5 lpf) flow rate



**ADA** **CSA B651** **OBC**

### Codes/Standards

ASME A112.18.1/CSA B125.1  
CSA B125.3  
CSA B64  
ASSE 1037  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

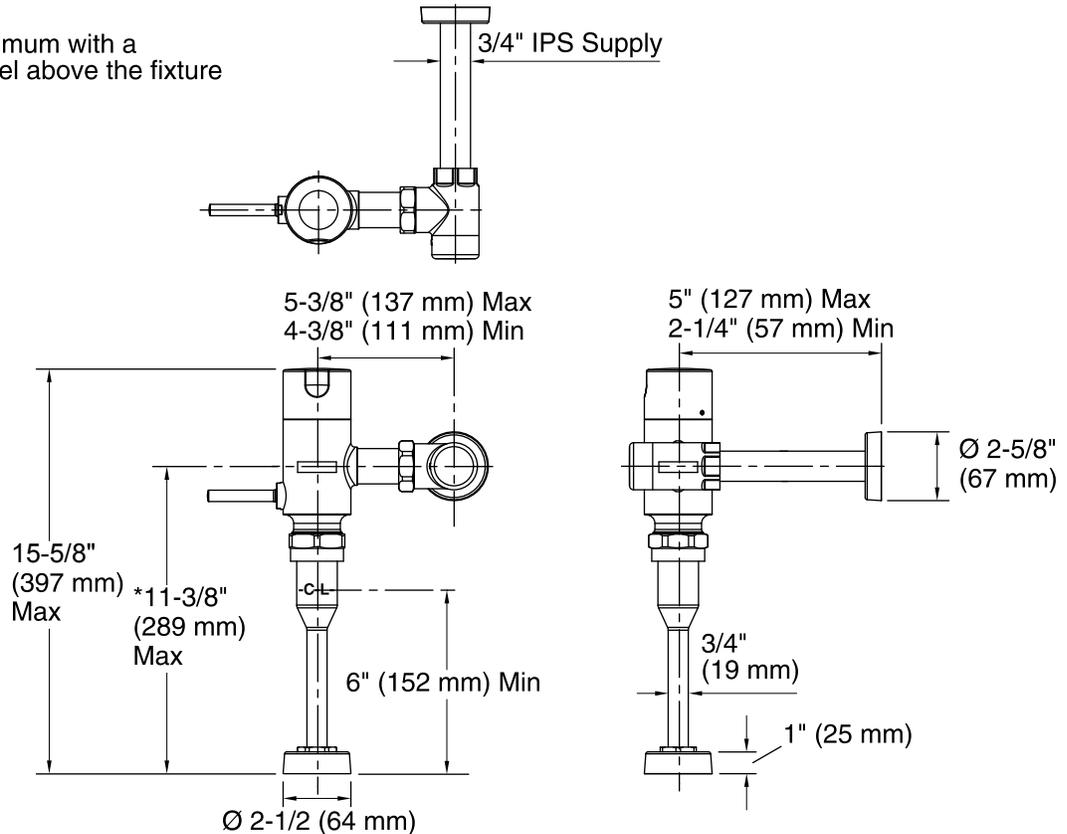

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 0.125 gal/min (0.5 l/min)

Pressure: 80 psi (5.5 bar)

### Notes

Install this product according to the installation guide.

**IMPORTANT!** Maintain a 6" (152 mm) minimum critical level above the fixture to prevent back-siphonage.

Operating pressure over 80 psi (552 kPa) is not recommended on most plumbing fixtures.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.