



09

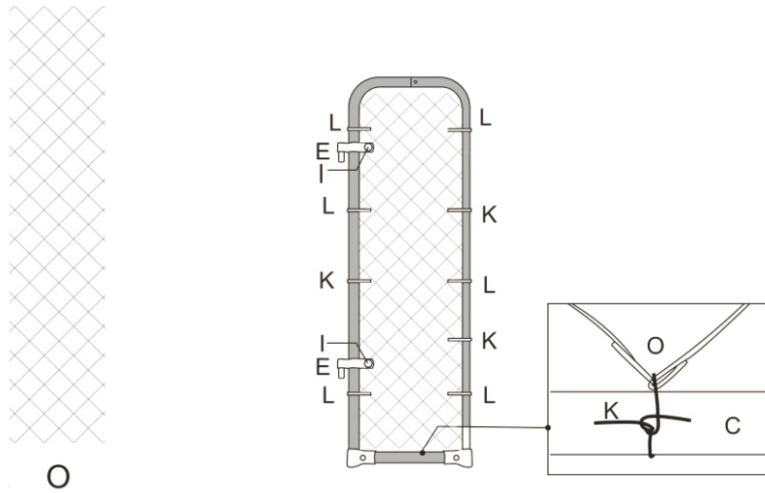


Install the chain-link mesh onto the gate frame. Then insert the two round rod into the edges of the chain-link mesh, and then use 4 pairs of hooks to fix the round rods and tube. Finally, use the bind-wire to fix the chain-link mesh to the gate frame to make the gate rigid and strong. (Note: loosen the clips on the post to allow adjustment and exact fitment)

DONE

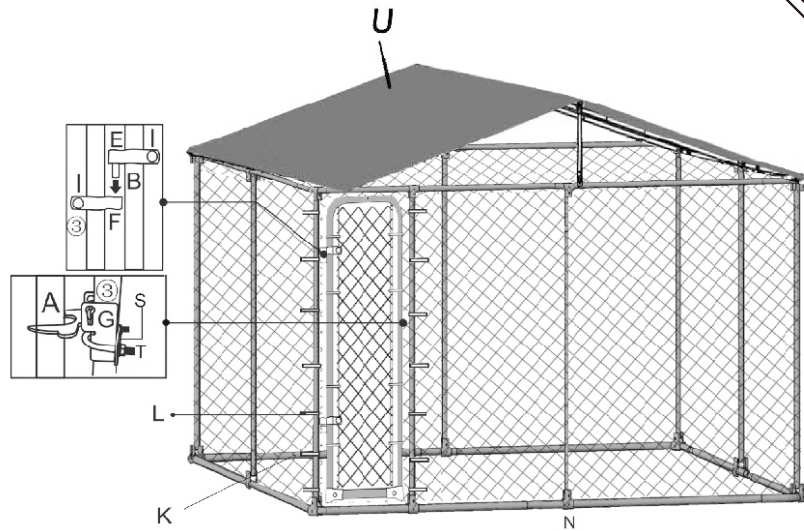

Use the door hinges (and the big set of screws) to fix the door to the frame. Then install the security-lock on the dog run. Tie bind wire to fix the top and bottom of the gate with chain-link mesh and make the gate safe and strong by using the screw gun with the drill to put a self-tapping screw through the pilot holes in the tubes-this also makes the dog run stronger.

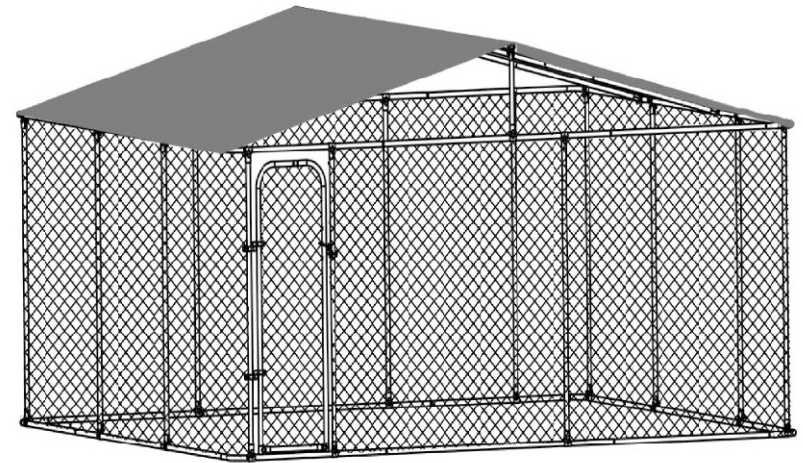

BOX 1-2		1/2 4.6x4.6x2.32m Dog kennel				
Model	Picture			Size	QTY	
A				295+1700mm	1	
B				325+1700mm	1	
C				497mm	1	
1				255+1319mm	8	
4				497mm	2	
5				1380mm	8	
6				1578mm	2	
7				1345mm	4	
8				1035mm	4	
10				1578mm	1	
Roof				4.6x4.8m	1	
V					1	
Model	Picture	Size	QTY	Model	Picture	QTY
D			76	K		1
E			2	L		1
F			2	Q		1
G			1	R		1
H		M8	38+2	S		1
I		M10	4	T		1
J			40+5	V		12

BOX 2-2		1/2 4.6x4.6x2.32m Dog kennel			
Model	Picture		Size	QTY	
N				1	
0				1	
2			1840mm	8	
3			1765mm	12	

