


JUMPKING[®]

Trampolines

User Guide

Made In China

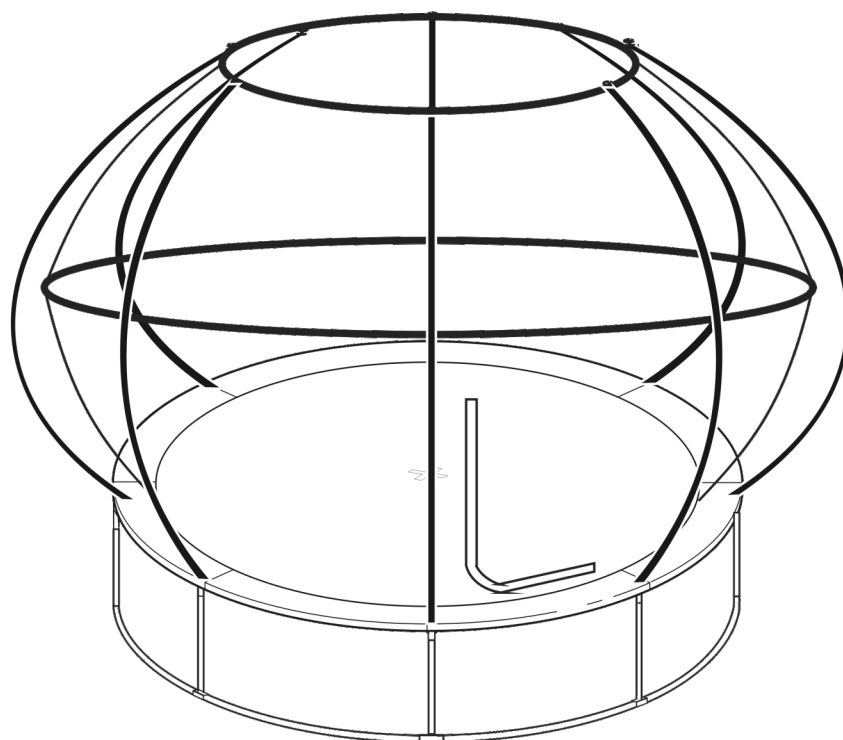

8ft (2.44m) ZorbPOD

with 10.5ft (3.20m) wide enclosure

**Got a Problem building your trampoline?
Call us on 0344 800 4060 and we can help**

Patent no: DE602006006495D1, EP1721640B1 and US7628731



WARNING: Read these assembly instructions carefully before attempting to assemble or use this product. Keep this user guide in a safe place for future reference.

IMPORTANT INFORMATION

. WARNING! ADULT SUPERVISION & GUIDANCE REQUIRED AT ALL TIMES.

- . Recommended age 6+ years.
- . No somersaults or flips - can cause serious injury.

WARNINGS!

- . Only for domestic use.
- . Maximum user weight limit 50 kg.
- . Not suitable for children under 36 months - small parts, choking hazard.
- . Outdoor use only.
- . The trampoline should be assembled by an adult in accordance with assembly instructions and checked in every instance before use.
- . Only one user. Collision hazard.
- . Always close the net opening before jumping.
- . Remove footwear before jumping on the trampoline.
- . Do not use the mat / jumping bed when it is wet.
- . Empty pockets and hands before jumping.
- . Always jump in the middle off the mat / jumping bed.
- . Do not eat whilst jumping.
- . Do not exit by a jump.
- . Limit the time of continuous usage (make regular stops).
- . Do not use in strong wind conditions and secure the trampoline.
- . The net should be changed every 1 year.

ADVISORY

- . This trampoline is not intended to be buried in the ground.
- . The following product dimension relate to this 8 ft round trampoline:
 - **Widest point of trampoline is 10.5ft (3.20m)**
 - Height from ground to top rail: 65 cm (0.65m)
 - Height from ground to top of enclosure: 265 cm (2.65m)
 - Height from top rail to top of enclosure: 200 cm (2.00 m)
- . The trampoline must be placed on a level surface at least 2m from any structures or obstructions such as fence, garage, house, overhanging branches, laundry lines or electrical wires.
- . Do not install the trampoline over concrete, asphalt or any other hard surface not at proximity of other conflicting installation, such as paddling / swimming pools, swings, slides or climbing frames.
- . Inspect trampoline / enclosure net before each use. Any damaged or worn parts must be replaced before using the trampoline (*see spare parts page 21*).
- . If an access ladder is used it should be removed when trampoline is not in use.
- . Make sure there are no children / animals / obstructions underneath the trampoline.
- . Access the trampoline through the door of the enclosure net only. Making sure you securely close it before bouncing.
- . Please do not use when windy or rainy this can cause you to slip and become injured.
- . Don't intentionally rebound off the enclosure net as this will weaken it.
- . Only attach manufacturer approved accessories to the trampoline and enclosure net.
- . Always jump in the middle of the mat and practice bounce techniques safety with adult supervision and guidance.
- . Jump without shoe.
- . In certain countries during winter period, the snow load and the very low temperature can damage the trampoline. It is recommended to remove the snow and store the mat and the enclosure indoors.

IMPORTANT PRECAUTIONS



- Do not land on your head or neck.
- Paralysis or death can result, even if you land in the middle of the jumping surface.
- To reduce the chance of landing on your head or neck, do not do somersaults (flips).
- Avoid bouncing when tired.




- Only **1 user** allowed at any one time.
- Multiple jumpers increase the chances of loss of control, collision and falling off. This can result in serious injury to head, neck, arms or legs.

JUMPING INSTRUCTIONS


Fundamental Bounce

1. Start from a standing position with your head erect and your eyes on the frame pad.
2. Swing your arms forward and up in a circular motion.
3. Bring your feet together and point your toes downward while in the air.
4. Keep your feet about 30 cm (15 in.) apart from when landing on the bed.




Knee Drop

1. Start bouncing from a standing position, keeping your eyes on the frame pad.
2. Land on your knees, keeping your back straight and your body erect.
3. Come back up to an erect position.




Hand and Knee Drop

1. Start bouncing from a standing position, keeping your eyes on the frame pad.
2. Land on the bed on your hands and knees.
3. Push with your hands and come back up to an erect position.




Seat Drop

1. Land in a sitting position with your legs parallel to the bed.
2. Place your hands on the bed beside your hips.
3. Push with your hands to return to an erect position.




Half Turntable

1. Start from the front drop position and push to the left or right with your arms to begin turning your body in the opposite direction.
2. Turn your head and shoulders toward the direction that your body is turning.
3. Keep your back parallel to the bed and your head up.
4. After completing a half turn, land in the front drop position.



Swivel Hips

1. Start with a seat drop.
2. Turn your head to the left or right and swing your arms up in the same direction.
3. Turn your hips in the same direction as your head and arms, completing a twist.
4. Land in the seat drop position.



CARE & MAINTENANCE

Regular care and maintenance of your trampoline is required. This will help prolong its life and reduce the possibility of injury. Neglecting this can lead to a risk for users.

Inspect your trampoline before each use using the checklist below as a guide. Take particular care in doing this at the start of each season and at regular intervals. Ensure all parts are intact and cannot become dislodged during play, tighten any screws or nuts and bolts where required.

IMPORTANT: If any faults are found, the trampoline **MUST NOT BE USED**. We advise that the trampoline is dismantled and placed in a dry place until new parts are fitted.

PART	CHECKLIST	OK	NOT OK
All Parts	Securely attached		
	Correctly positioned		
	No sharp edges or points present		
	No missing parts		
Springs	No damage (<i>bent / broken</i>)		
	No missing parts		
Frame / Enclosure Poles	No bent parts		
	No damage		
	No rusting or corrosion		
Bed / Enclosure Net / Frame Pad / Foam Tubes	No missing parts (e.g. V-rings / Ties / Zips etc.)		
	No sagging		
	No damage (Holes / Rips / Fraying / Tearing)		


Looking after your trampoline:

- **Use trampoline as advised on pages 2-3.** Excess weight and improper use of the trampoline will damage it and cause it to break easily.
- **Keep trampoline clean.** If any part becomes dirty, clean with a damp cloth and dry thoroughly. Do not use any abrasive cleaners as this could damage the product.
- **Store enclosure net and frame pad in a dry place when not in use.** Prolonged exposure to sun and harsh weather can shorten its life.
- **Keep bed in good condition by protecting it with a cover** (*available to buy from our website*). Common damage can be caused by water pooling, garden/outdoor debris landing on it, sparks from nearby bonfires or firework displays landing on it.
- **Keep animals/pets away from the trampoline,** their claws can damage it.
- **Protect from high winds.** A trampoline can act like a sail in strong winds. It can be blown over which can cause damage to the frame and surrounding areas. We recommend that it is moved to a sheltered location and secured to the ground (*tie-down kit available from our website*), or dismantled and stored away.
- **Dismantle and store away in a dry place if not being used for long periods.** Follow assembly instructions in reverse order making sure the springs are removed before dismantling frame.
- **Take care when moving trampoline.** To be lifted by 2 people. Lift slightly off the ground, keeping the frame horizontal. Never drag to move it as this can displace parts. Always check that parts are positioned correctly after moving.


BUILDING YOUR TRAMPOLINE

1. This is a 2 person build.
2. Time for build is approximately 2 hours.
3. Choose a good location:
 - On a level surface that is soft (*wood chippings, sand or grass*).
 - Ensure adequate overhead clearance. A minimum of 24ft (7.3m) from ground level, away from wires, trees and other possible hazards.
 - Ensure a clear space of 8.2ft (2.5m) around sides, away from walls, fences, structures, tarmac and other hard surfaces and play areas.


WHAT YOU WILL NEED




Description:
Cross-head screwdriver



Description:
Gloves




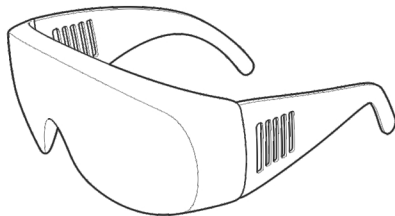



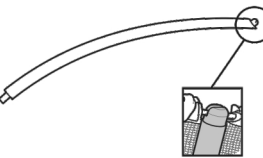



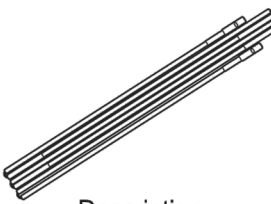
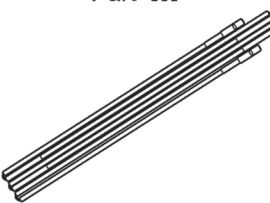





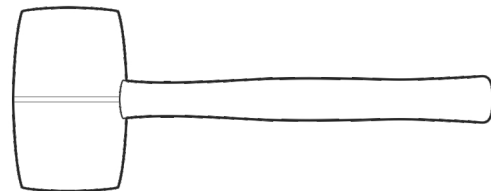Description:
Safety glasses





Description:
Mallet

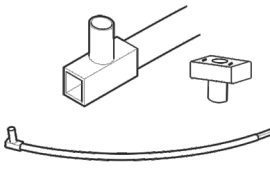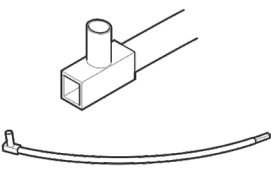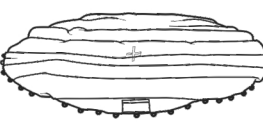
PARTS LIST

<p>Part A</p>  <p>Description: Top Tube with POD-connector Quantity: 8</p>	<p>Part B</p>  <p>Description: Bottom Tube with T-Connector Quantity: 8</p>	<p>Part C</p>  <p>Description: Leg extensions Quantity: 8</p>	<p>Part D</p>  <p>Description: Stitched bed Quantity: 1</p>
<p>Part E</p>  <p>Description: 7" Silver Springs Quantity: 40</p>	<p>Part F</p>  <p>Description: 6.5" Gold Springs Quantity: 16</p>	<p>Part G</p>  <p>Description: Frame pad Quantity: 1</p>	<p>Part H</p>  <p>Description: Top enclosure poles Quantity: 8</p>
<p>Part I</p>  <p>Description: Middle enclosure poles Quantity: 8</p>	<p>Part J</p>  <p>Description: Bottom enclosure poles Quantity: 8</p>	<p>Part K</p>  <p>Description: Self tapping screws and spring washers Quantity: 56</p>	<p>Part L</p>  <p>Description: Middle Black G3 poles Quantity: 2</p>
<p>Part M</p>  <p>Description: Top Black G3 poles (Small) Quantity: 2</p>	<p>Part N</p>  <p>Description: Enclosure netting Quantity: 1</p>	<p>Part O</p>  <p>Description: Cords Quantity: 4</p>	<p>Part P</p>  <p>Description: Spring tool Quantity: 1</p>

PARTS LIST

Part Q	Part R		
 <p>Description: Plastic Cap Cover</p> <p>Quantity: 8</p>	 <p>Description: POD-connector Plastic Cap</p> <p>Quantity: 8</p>		

STEP 1 : ASSEMBLING THE FRAME

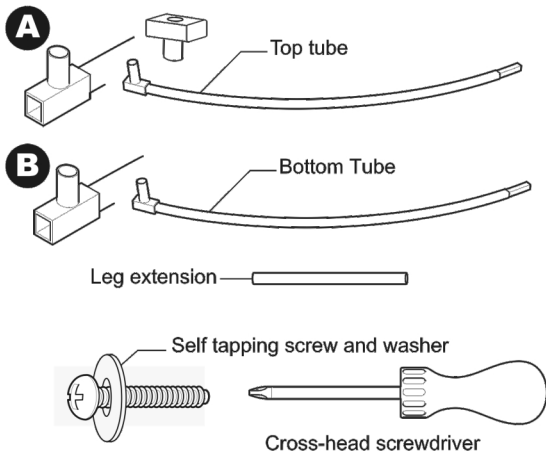

You will need the following parts to complete section 1:


8 x Top Tubes with POD-connector - **Part A**

8 x Bottom Tubes with T-connector - **Part B**

8 x Leg extensions - **Part C**

40 x Self tapping screws and washers - **Part K**

You will also need a cross-head screwdriver (*not supplied*).

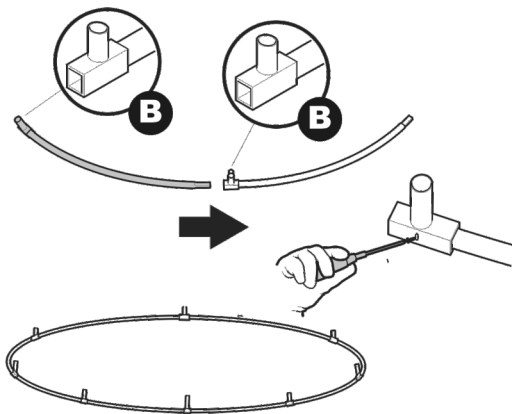


First we will complete one of the 8 sections of the bottom tube.

Slot the narrow end of the top tube with T-connector into T-connector.

Screw one of the self tapping screws through the slot in the T-connector and into the hole in the Bottom tube using the cross-head screwdriver.

Complete the bottom tube sections in circle.

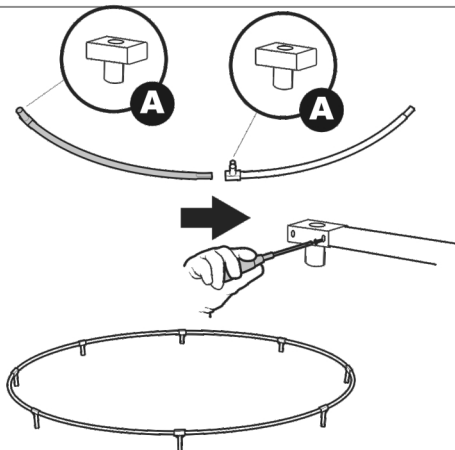


Then we will complete one of the 8 sections of the Top trampoline frame.

Slot the narrow end of the top tube with POD-connector into POD-connector.

Screw one of the self tapping screws through the slot in the POD-connector and into the hole in the Top tube using the cross-head screwdriver.

Complete the top tube sections in circle.

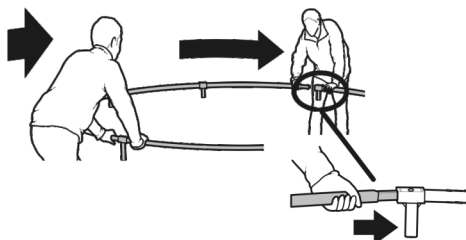


Important:

You need to slot the frame together, **this will take some force**. The easiest method is if the two people face each other.


Hold the top tubes either side of the T-connectors or POD-connectors and push towards each other until the loose end of the frame can be inserted into the T-connector or POD-connector.

STEP 2 : ASSEMBLING THE FRAME

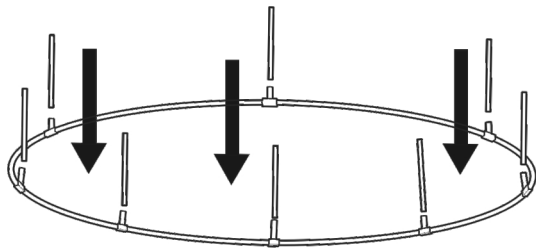


Insert the leg extensions into the T-connectors on the bottom rail.

Note: You may need to tap the leg extension in using a rubber mallet. Do not use a metal hammer on the metal tube as this may distort the end of the tube.



Screw one of the self tapping screws through the slot in the T-connector and into the hole in the leg extension using the cross-head screwdriver.

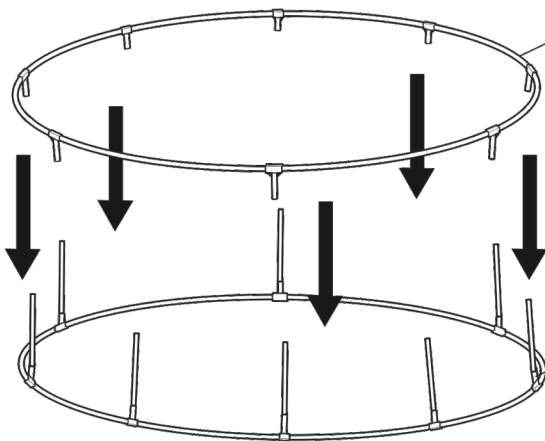


Top tube (Silver)


This step will require 2 people who must be wearing gloves.

Connect the top and bottom tube together as shown in the diagram.

Bottom tube (Black)



Cross-head screwdriver




Self tapping screw


You will also need a cross-head screwdriver (*not supplied*).

Slot the POD connector into the leg extension.


Align the hole in the bottom of POD-connector with the slot in the leg extension.

Screw one of the self tapping screws using the cross-head screwdriver.

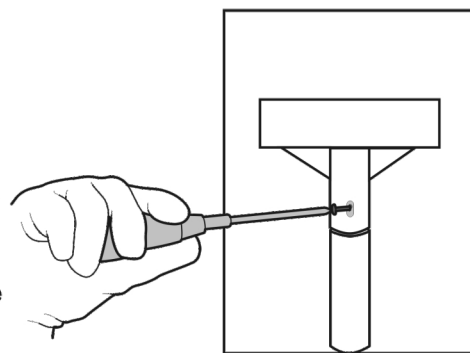



Attach the other two colored stitched V-Rings to the POD-connector using the same method as shown.

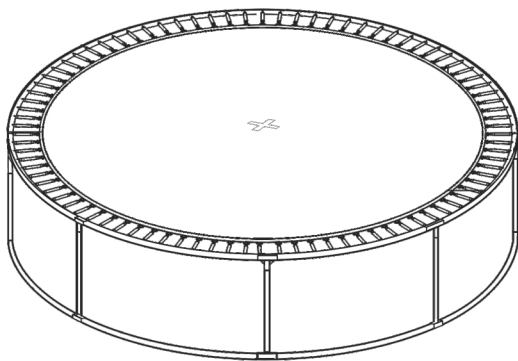


Continue to attach springs in the same sequence as above: in the middle of each section, making sure the next spring is attached on the opposite side to even out the tension.

Important: The stitched bed is designed like elastic to be bouncy, which means that during construction it may look like it won't fit. Please note that it will stretch to the correct size when attaching the springs, this may take some force.

The stitched bed is now fitted and you have completed step 3.


The trampoline base frame is now assembled.

STEP 3 : FITTING THE STITCHED BED

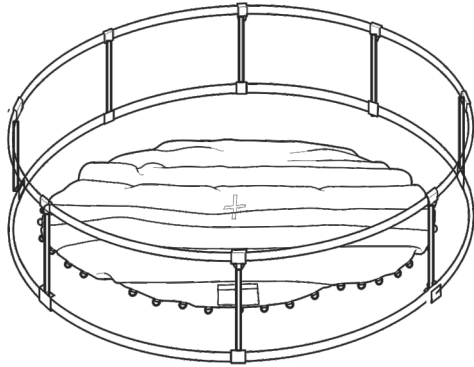


This step will require 2 people who must be wearing gloves and protective eye wear.

Lay the stitched bed (*with the V-Rings*) out inside the frame of the trampoline with the warning labels facing upwards.

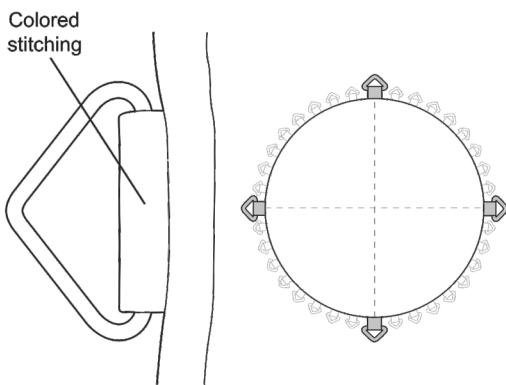


Locate the 4 V-Rings with the colored stitching. These will be at 90° to each other.

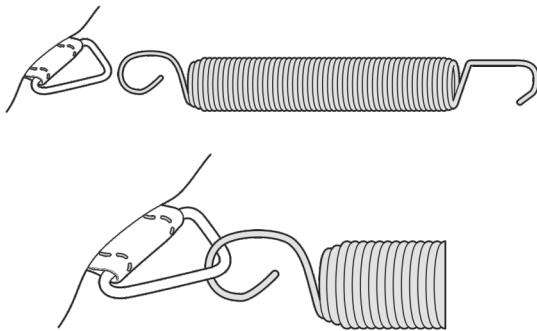

Slot one of the gold springs onto one of the colored stitched V-Rings as shown.

Important: gold springs must be slotted on the right way around.

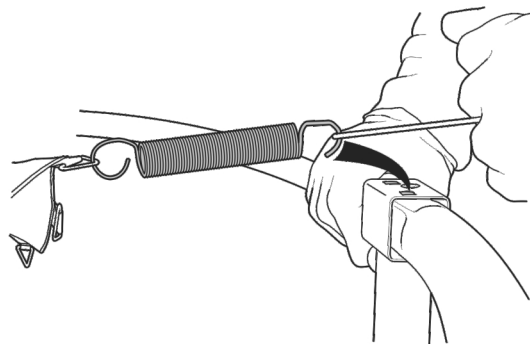


Attach a gold spring to the opposite colored stitched V-Ring.

Important: You will now need to use the spring tool to attach the spring to the frame.

Hook the spring tool onto end of gold spring, and pull until the gold spring can be slotted into the spring slot on the top of POD-connector.


IMPORTANT: Ensure the spring is fully inserted into the slot on the top of the frame.

STEP 4 : FITTING THE FRAME PAD

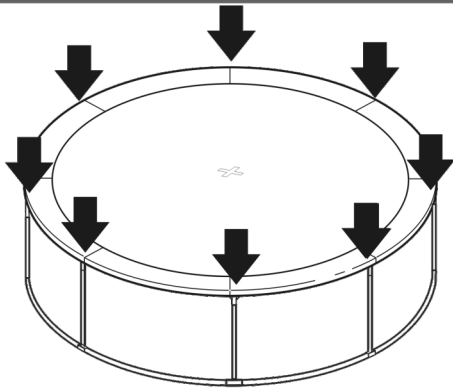


This step will require 2 people.


Lay the frame pad - **Part G** out over the edge of the frame with the ties facing downwards.

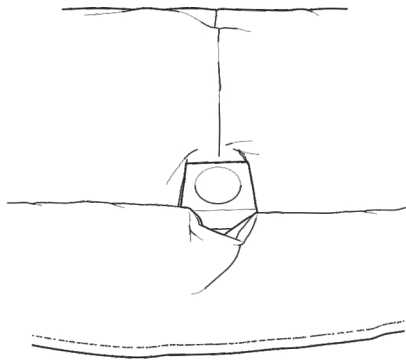

Align the openings in the frame pad with the POD-connector's on the frame.

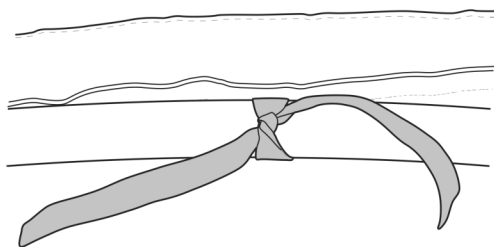

Tie the outer elastic straps on the underside of the frame pad around the top tubes of the frame.

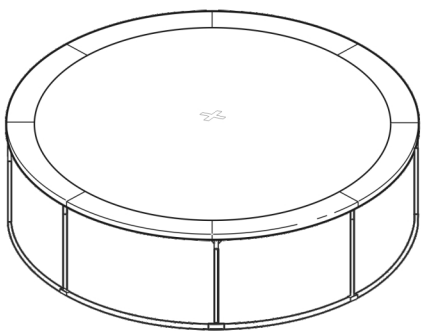

The frame pad is now fitted and you have completed step 4.


WARNING: The trampoline **MUST NOT** be used during construction.

STEP 5 : FITTING THE ENCLOSURE NETTING



Black G3 poles (small)


You will need the following parts to complete step 6:




Enclosure netting

2 x Top Black G3 poles (Small) - **Part M**


1 x Enclosure netting - **Part N**




Lay the enclosure netting out on the trampoline.

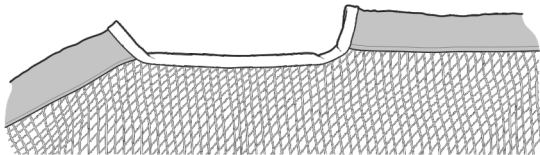


Find the sleeves that run along the top of the enclosure netting.




Slot the thin sections on the two black G3 poles into the metal ends so the poles become two long sections.

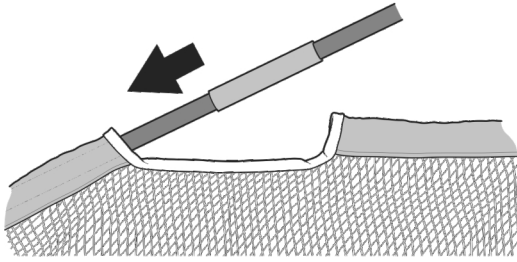

Slot one of the Black G3 poles through three of the sleeves on the top of the enclosure netting.

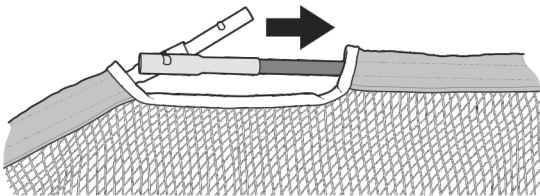


Slot the remaining Black G3 poles through the three other sleeves on the top of the enclosure netting.

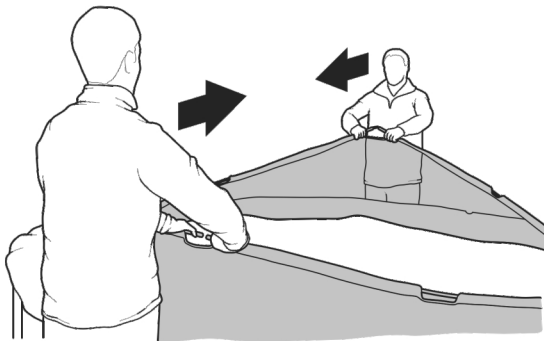

You will now join the two ends of the Black G3 poles together with the fitted pole connectors, this will require two people.

Both people hold two of the poles end sections and walk towards each other to bend the poles into a circle.

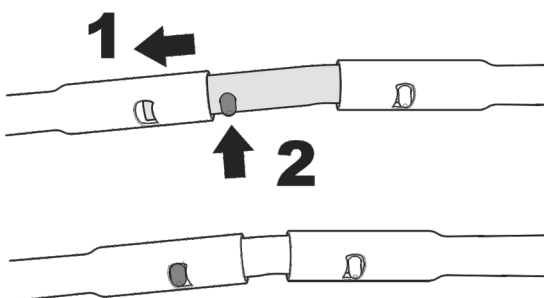


As soon as the poles are bent enough, insert the connectors into the socket on the other pole (1).

Push the pin inwards (2) and fully insert the connector.

Ensure the pin is protruding through the slot in the socket.

Proceed same step for Black G3 poles (small) on middle of enclosure mesh.

STEP 6 : FITTING THE ENCLOSURE TUBES

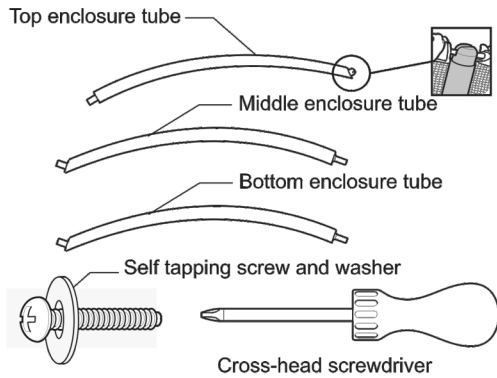

You will need the following parts to complete step 5:

8 x Top enclosure tubes - **Part H**



8 x Middle enclosure tubes - **Part I**

8 x Bottom enclosure tubes - **Part J**


16 x Self tapping screws and washers - **Part K**

8 x Plastic Cap Cover - **Part Q**


You will also need a cross-head screwdriver (*not supplied*).

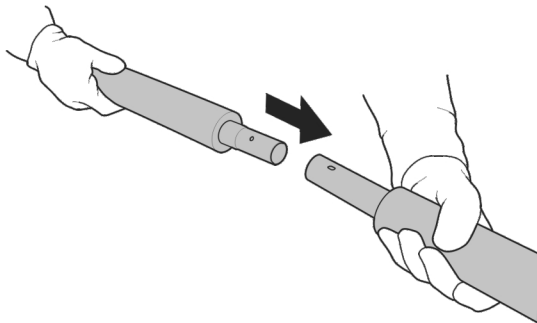

Slot the thin end of one of the middle enclosure tubes into the open end of one of the top enclosure tubes.

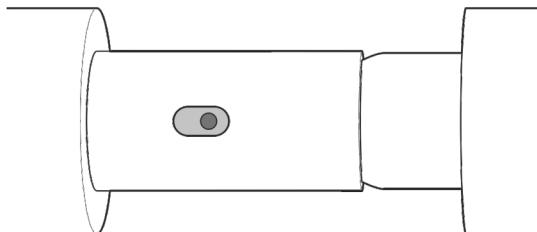


Align the hole in the enclosure tube.

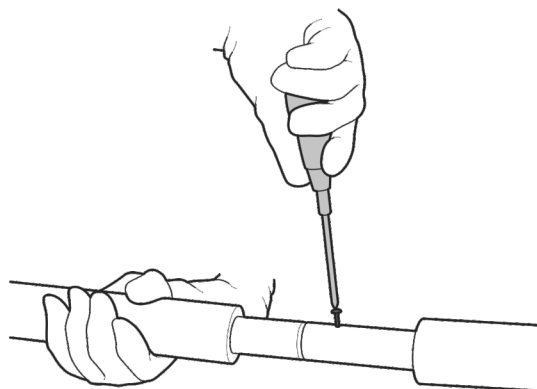


Screw one of the self tapping screws through the slot in the enclosure tube using the cross-head screwdriver.

Repeat for the remaining 7 Top and Middle enclosure tubes.

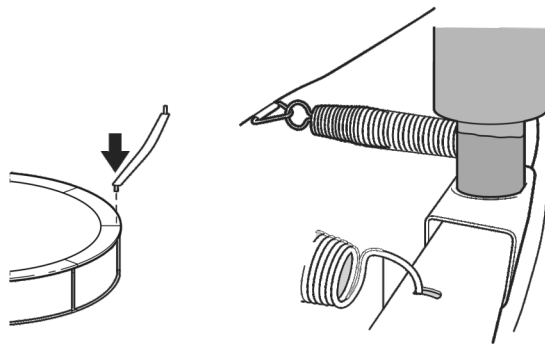


Slot the bottom enclosure tube into the tubes in the POD-connector tubes visible through the slots in the frame pad.

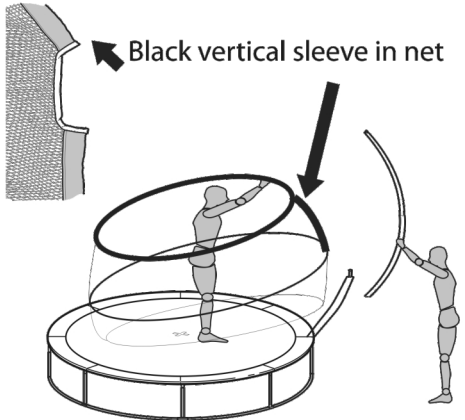


For this next step you will need:
Person A standing on the trampoline bed (inside G3 hoop) with cap covers.
Person B standing on the ground near the enclosure poles.

Person B threads 1 section of top/middle enclosure pole through the black sleeves in the net.
 Hold this whilst the next step is taking place.

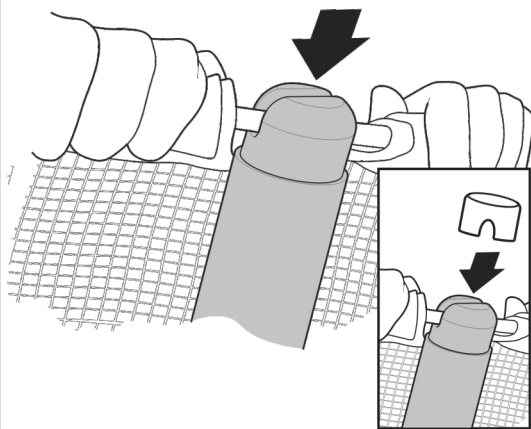


Person A will then slot one of the exposed sections of Black G3 pole into the cap on top of the enclosure pole.

Then push the Plastic cap cover (Part Q) over the cap until it clicks into place.

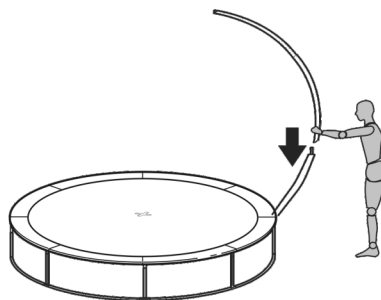


Person B - lift the middle enclosure pole and slot the bottom enclosure pole inside. (do not screw these 2 parts together yet)

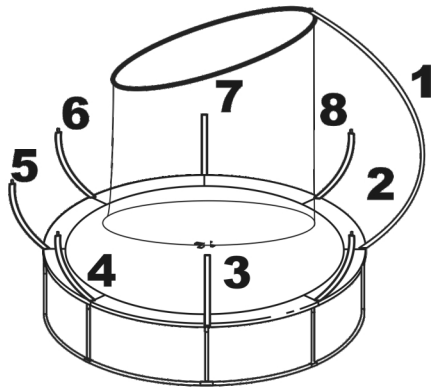

Repeat this step in a clockwise motion for all of the remaining poles.

Note: Due to height restriction, you may need to fit the G3 to the last 2 poles before inserting bottom enclosure pole.

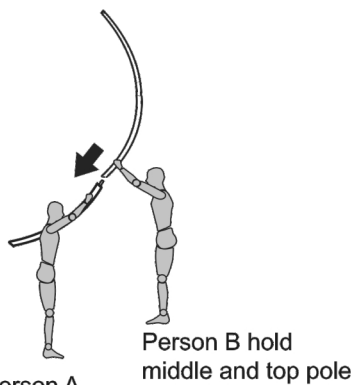


Person A hold bottom enclosure pole

Person B hold middle and top pole

Now that your G3 hoop is securely attached at the top, you need to thread the bottom enclosure pole through the bottom sleeve.

With Person A back on the ground. Person A removes bottom enclosure pole from POD-connector and separate from middle enclosure pole, with help of Person B

Person B then holds onto middle enclosure pole, whilst Person A threads bottom enclosure pole through bottom black sleeve in net.

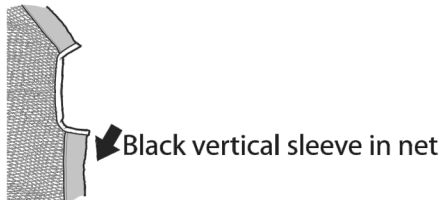


Black vertical sleeve in net

Now reassemble the enclosure poles and insert into the POD-connector.

Repeat this step in a clockwise motion for all of the remaining poles.

Now all parts can be screwed into place.

You have now completed Step 6.




STEP 7 : FITTING THE MIDDLE G3 POLE





Middle Black G3 poles

You will need the following parts to complete step 7:


2 x Middle Black G3 poles - **Part L**

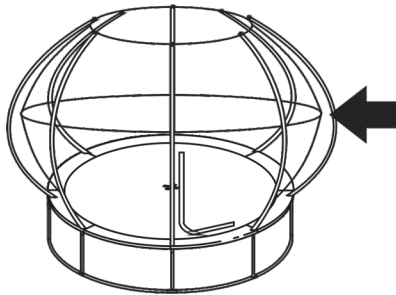


Find the sleeve that runs along the middle of the enclosure netting.

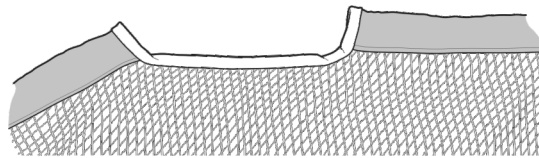

Slot together the G3 poles to become 2 long sections

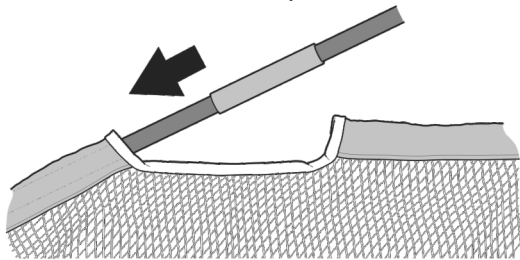


Unfasten the velcro strap to find opening. Slot 1 of the black G3 poles through the opening until out the opposite side.

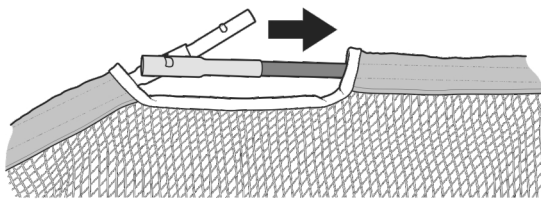


Slot the other Black G3 pole through the other side of the sleeve.

You will now need a person on either side of the trampoline, pushing towards each other whilst joining with connector.

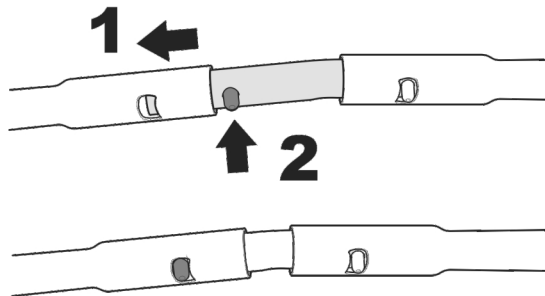


Fasten Velcro strap.

STEP 8 : ATTACHING THE BOTTOM OF THE NET

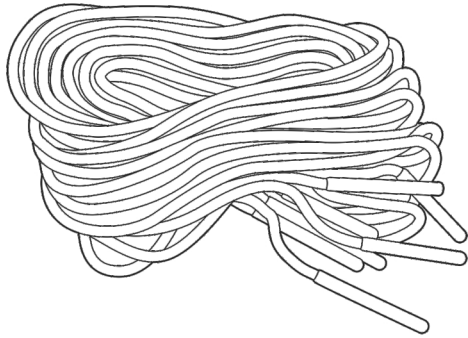


You will need the following parts to complete step 8:
4 x Cords - **Part O**.

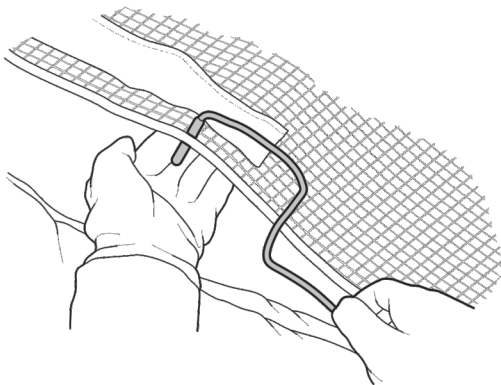

Push 1 end of a cord through a hole in the bottom of the netting.

Then tie this end to a V-ring on the bed.


Important: Keep the cord tight at all times.

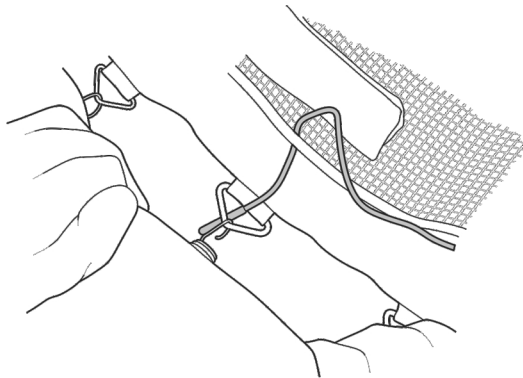

Slot the other end of the cord through the next V-ring.

Then slot back through the net and into the next V-ring. Continue to do this until you have used most of that cord and tie end to next V-ring.


Tie another cord to same V-ring and repeat until net is sewn in.

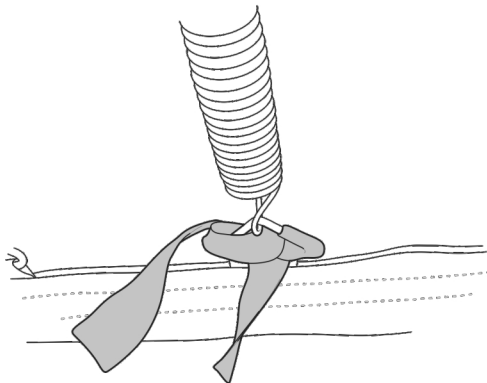

From the underside of the trampoline, tie the remaining elastic straps around the springs or through the V-Rings.


You have completed step 8 and the trampoline is fully assembled.

USING THE TRAMPOLINE

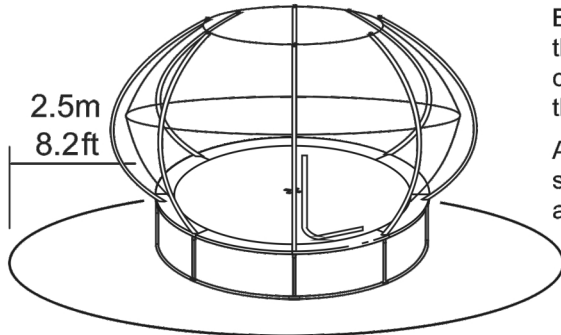


Before using your trampoline, check again that there is enough clearance around it. Maintain a clear space of 2.5 metres (8.2 feet) on all sides of the trampoline.

Also check that the area is free from walls, structures, fences, tarmac and other hard surfaces and other play areas.

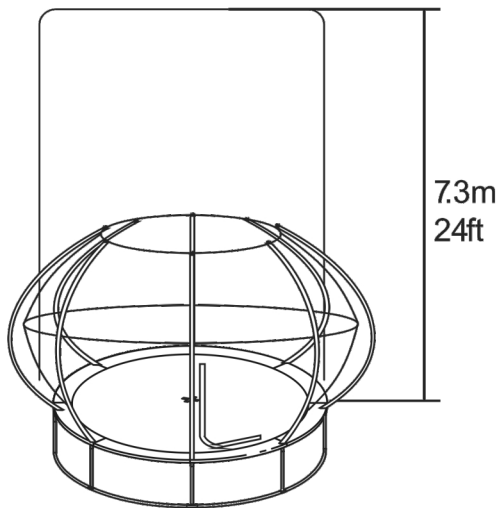

Ensure that there is 7.3 metres (24 feet) clearance above the trampoline.

Also check that there are no overhanging objects in the area above the trampoline.

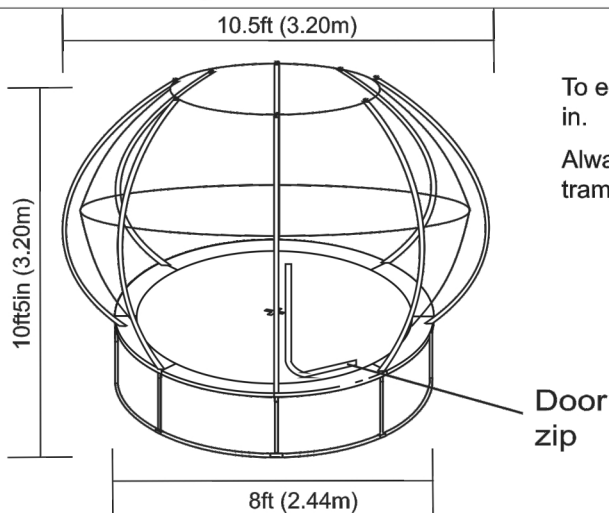

To enter the trampoline, unzip the door and climb in.


Always close the doorway before using the trampoline.

SPARE PARTS

To order replacement parts, you can email us on: customerservice@yjeurope.co.uk, or call our Customer Helpline on: 0344 800 4060.

To help us assist you, please provide the following information when calling:

- The PRODUCT DESCRIPTION: **8 FT (2.44M) ZORBPOD TRAMPOLINE**
- The KEY No. and DESCRIPTION of the part (see parts list below).
- The quantity needed.
- The desired method of shipping.

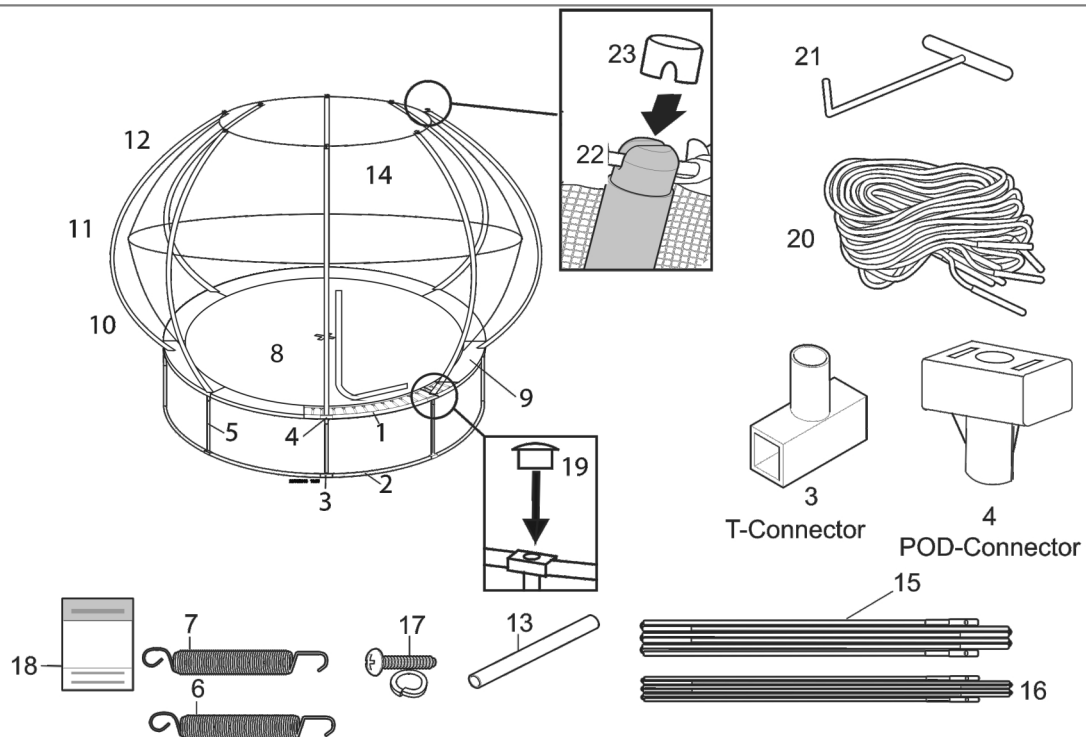

Key No.	Description
1	Top tube with POD-connector
2	Bottom tube with T-connector
3	T-connector(B marking)
4	POD-connector(A marking)
5	Leg extension
6	7" length spring
7	6.5" length gold spring
8	Jumping mat
9	Safety frame pad
10	Bottom enclosure pole
11	Middle enclosure pole
12	Top enclosure pole

Key No.	Description
13	Enclosure foam sleeve
14	Enclosure mesh
15	Middle Black G3 FRP pole
16	Top Black G3 FRP pole (Small)
17	Screw and spring washer
18	User manual
19	Connector plastic cap
20	PP rope
21	Spring tool
22	Plastic cap
23	Plastic cap cover

For a full range of accessories and replacement parts call 0344 800 4060 or visit our web site at: www.jumpking.eu