
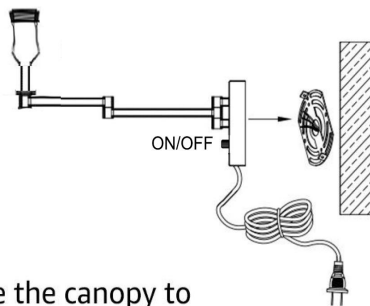



# INSTALLATION INSTRUCTIONS

## Connect Power Using Plug

1. Secure the base plate using screws.



2. Secure the canopy to base plate with two screws.

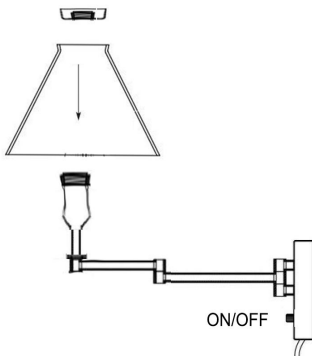


3. Fix the lampshade with screws and install a bulb with E26 base (maximum 60W).

Note: if your wall has a Ground Wire(copper/green), then please connect it with the Fixture Ground Wire. If not, then just leave the Fixture Ground Wire as it is, no need to connect anything.

## Connect Power Using Wires


1. Secure the base plate with screws and cut the plug to an appropriate length.

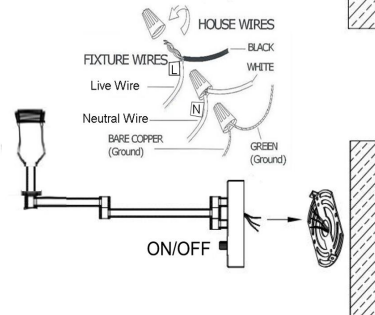

Note:

- 1)Connect the Neutral Fixture Wire(N) with the Neutral Supply Wire(N)from the Building.
- 2)Connect the Live Fixture Wire(L) with the Live Supply Wire(L) from the Building.
- 3)Connect the Bare Fixture Wire(G) from the back plate with the Bare or Green insulated wire(G) from the Building.

2. Connect wires and fasten the lamp to base plate with the two screws.

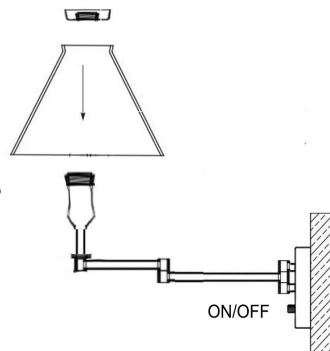

3. Fix the lampshade with screws and install a bulb with E26 base (maximum 60W).