















CARE AND MAINTENANCE

Store outdoor furniture indoors or cover well when it is not in use. Dust regularly with small brush or vacuum. Spills should be taken care of immediately before they harden or stain with a slightly dampened sponge.

NOTICE

Please make sure that you have all parts indicated before you begin assembly of this item.

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Back		1x
B	Seat		1x
C	Side		2x
D	Right Leg		2x
E	Left Leg		2x
F	Joint bar		2x
H1	Allen Bolt L	 M6x75	1x
H2	Allen Bolt M	 M6x60	4x
H3	Allen Bolt S	 M6x45	1x
H4	Allen Screw	 M6x50	4x
H5	Allen Bolt S1	 M6x35	8x
H6	Allen Bolt S2	 M6x30	4x
H7	Wrench		1x
H8	Allen Key		1x

Product Dimension: 82.68"W x 29.13"D x 28.74"H

Weight capacity : 600 lbs


Warning : Do not stand on the bench

Warning : Do not torque bolts / screws

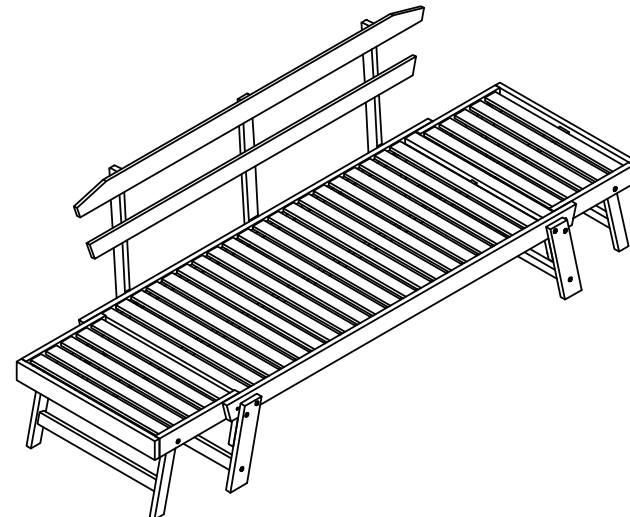


PREPARATION


Before beginning the assembly of the product, make sure all parts are present. Compare the parts with the package contents list and hardware contents list. If any parts are missing or damaged, do not attempt to assemble the product. Tool required for assembly (included): Allen Key and Wrench.

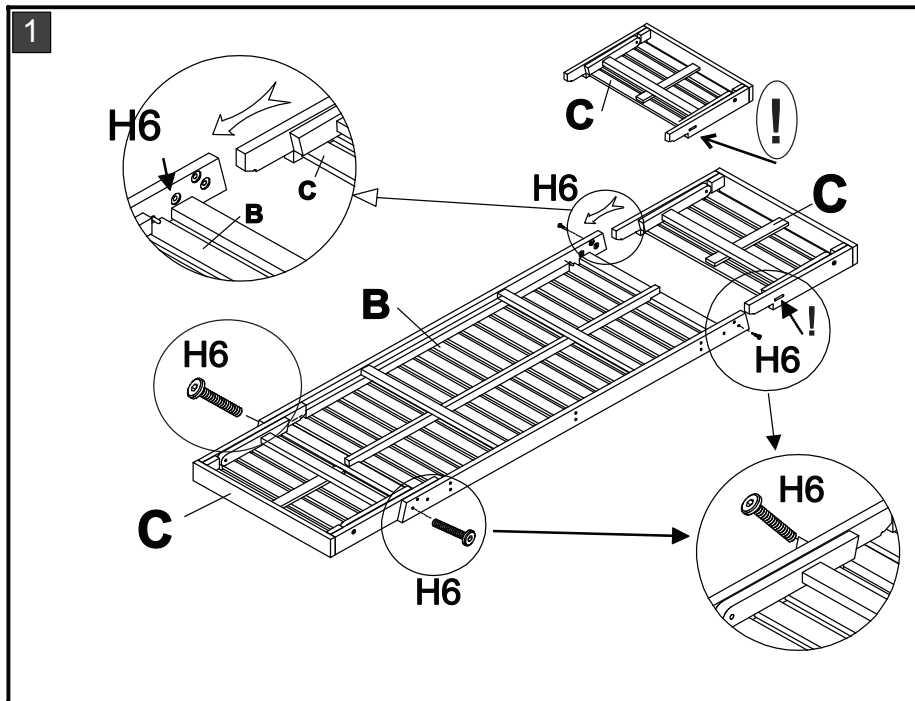


Step 1: attach the side (C) to the seat (B) both side as shown on the picture. Then use the Allen Bolt (H6) to tighten all sides by using the Allen Key (H8). Make sure the Allen bolt S2 (H6) come inside the hole of the side back (C) as shown on the picture.

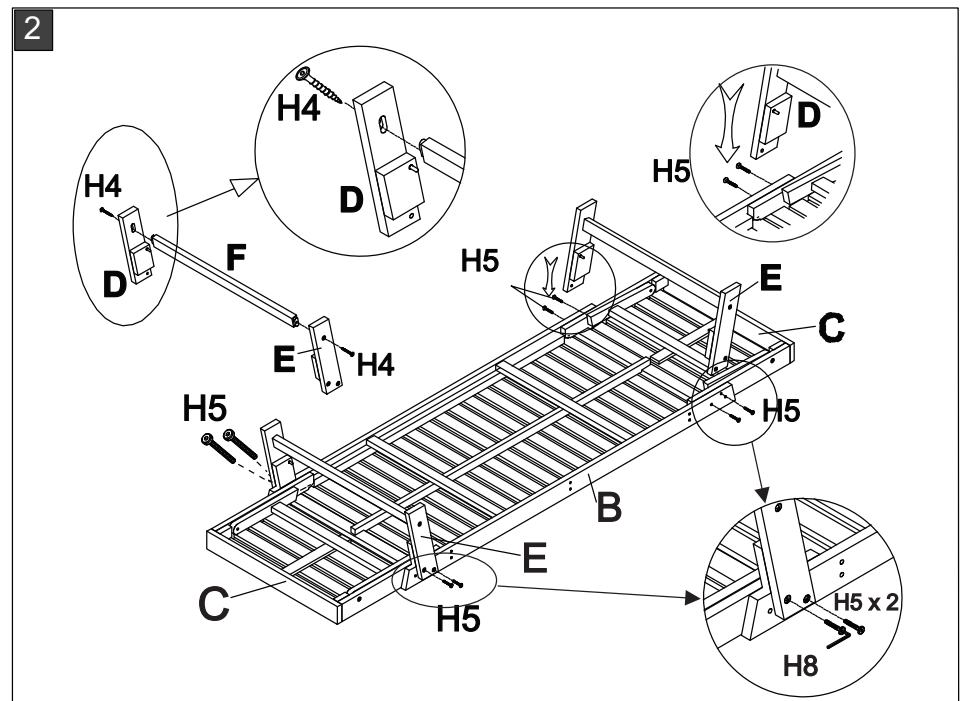

Step 2: attach the Right Leg (D) and Left Leg (E) to the Joint bar (F) as shown on the picture. Use the Allen Screw (H4) to attach it together and tighten by the Allen Key (H8). Then put these legs to the seat (B), using the Allen Bolt S1 (H5) and tighten all by using the Allen Key (H8) as shown on the picture.

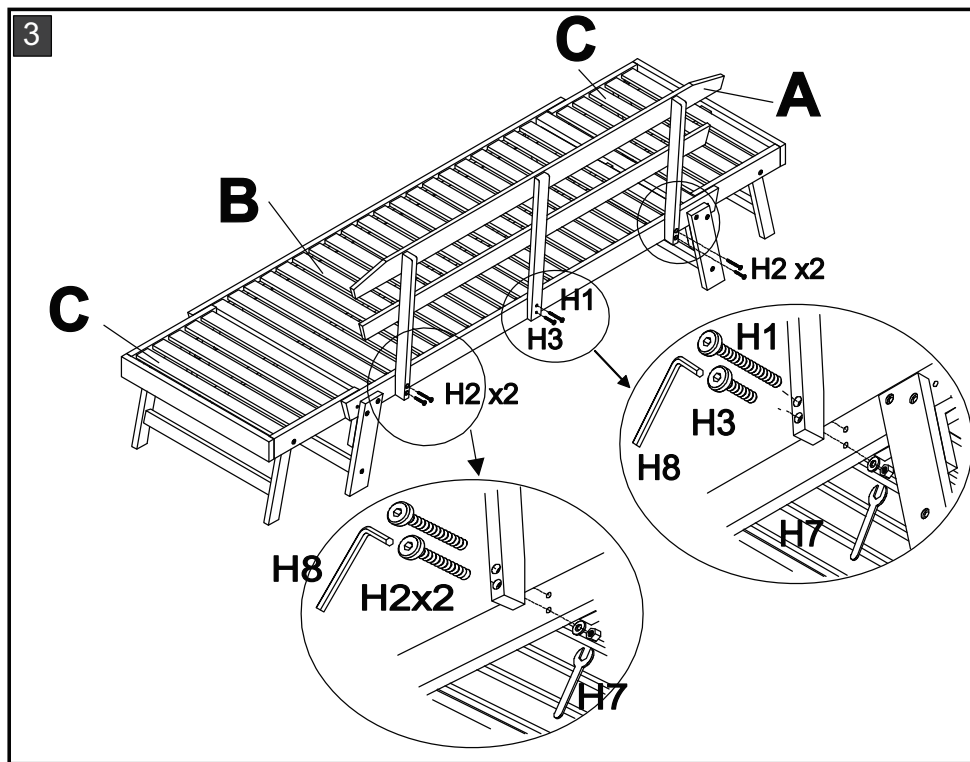

Step 3: attach the back (A) to the seat (B) as shown on the picture. Then use the Allen Bolt L (H1) and the Allen Bolt S (H3) in the middle , positons left and right use Allen bolt M (H2) and tighten by the Allen Key (H8) and the Wrench (H7) as shown on the picture. Make sure put correct positions to use the Allen Bolt (H1) ,the Allen Bolt S (H3) and the Allen Bolt M(H2) as shown on the picture.

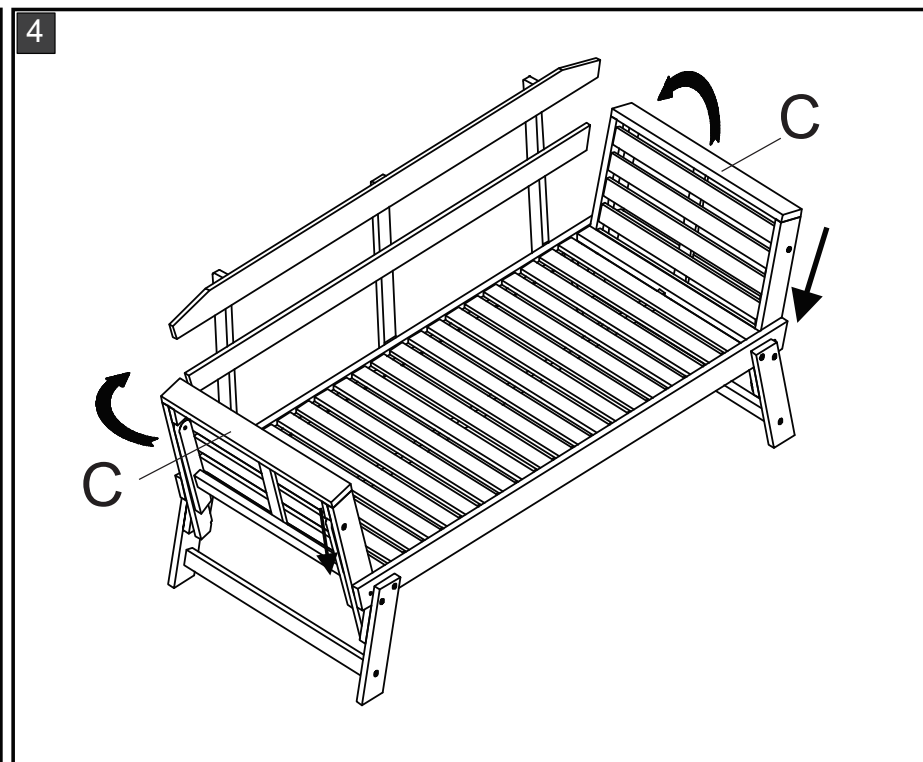

Step 4: Lift up the Side (C) as shown the picture and put down to lock the side on the seat (B) then can use this lounger same as this bench.