

ASSEMBLY AND INSTALLATION INSTRUCTIONS


WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

Fig.1



Fixture Wires Black or Smooth	House Wires Black or (Hot)
Fixture Wires White or Ribbed	House Wires White or (Neutral)
Fixture Wires Bare or (Ground)	House Wires Green or Bare Copper (Ground)

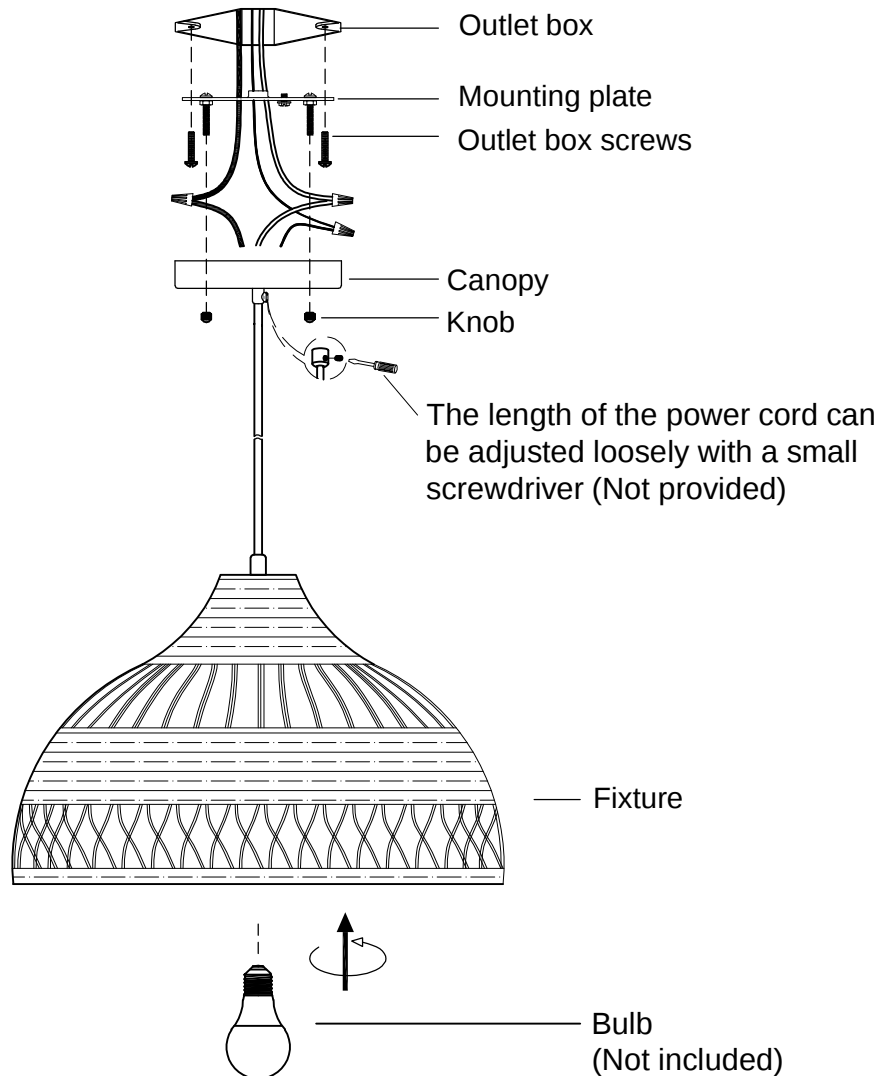

1. Shut off the power at the circuit breaker and remove existing fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.
3. Secure mounting plate to the outlet box using outlet box screws.
4. Adjust the fixture wire length by loosen the plastic screw and pulling the wire as desired. Secure the plastic screw, The rest of the wire is hidden inside the canopy, and then fix the plastic
5. Connect the fixture wires to supply wires as shown in Fig.1, making sure that all wire connectors are secured. If your outlet box has a green or bare copper ground wire, connect the fixture ground wire to it. Otherwise, connect the fixture's ground wire directly to the back plate using the green screw provided. After wires are connected, tuck them carefully inside the switch box.
6. Fasten the fixture through the mounting screw on the mounting plate with the knob.
7. Install the bulb (not included). Please follow the wattage label located on the fixture body.
Do not exceed the recommended wattage.