


# INSTALLATION INSTRUCTION

SKU:

WEIGHT

2.1kg

LIGHTS

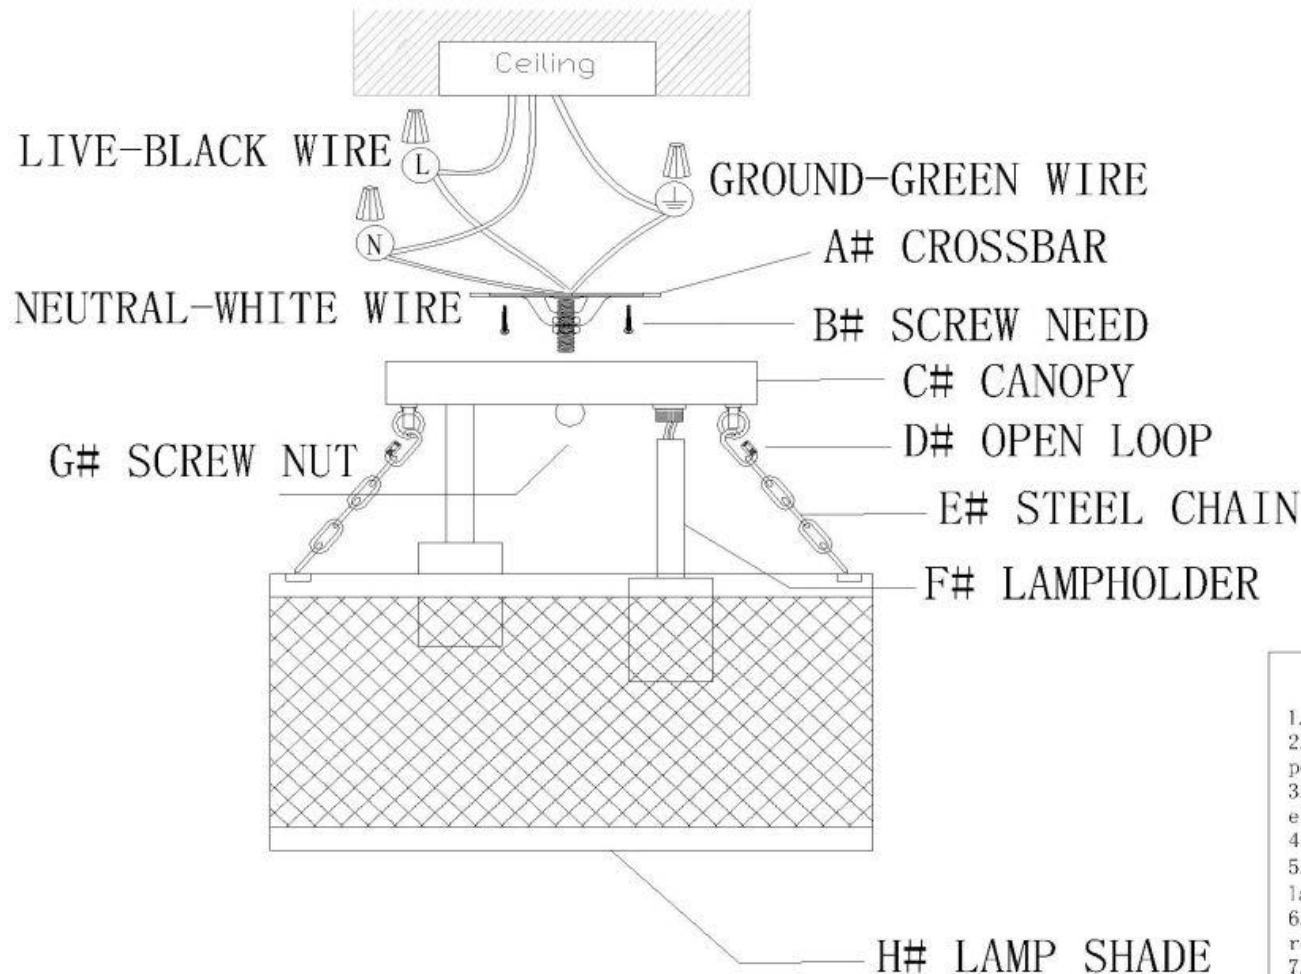

FRONE VIEW

## ASSEMBLE OF FIXTURE

1. Fix the CROSSBAR(A#) to the ceiling by the SCREW(B#)
2. Slowly pass wire go through CANOPY( C# ), then thread The LAMPHOLDER (F# ) onto Protruding screw thread from CANOPY ( C# )
3. Connect the LAMP SHDE(H#) and CANOPY (C#) by STEEL CHAIN (E#).
4. Fix the lamp fixture onto the Crossbar (E#) by SCREW NUT(G#).

## NOTE

1. Electrical appliances must only be connected by competent persons.
2. Before commencing installation work disconnect the mains cable from the power supply-removing the fuse or turning switch to "OFF"!
3. Do not attach lamps to surface which are damp, freshly painted, otherwise electrically conductive.
4. Use the subjection system according to the weight of the lamp.
5. Be sure to always use the correct type of bulb. (See information on the label)
6. Cleaning is limited to the outer surfaces, shades or protective glass, reflectors and covers.
7. Do not touch the bulb without any protective measures. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.
8. If the light is with crystal or glass, please follow below steps.  
Check the packed bags with numbers then open them.  
Hang the crystals to the right places according to the illustration.