


Field Tile Size



Walnut - WAL
ELMW00WAL636 - 6"x36" Honed

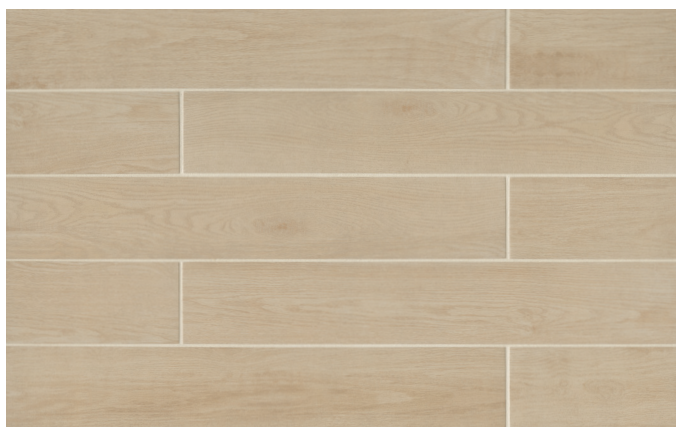


Light Oak - LIG
ELMW00LIG636 - 6"x36" Honed



Oak - OAK
ELMW00OAK636 - 6"x36" Honed



Grey - GRE
ELMW00GRE636 - 6"x36" Honed

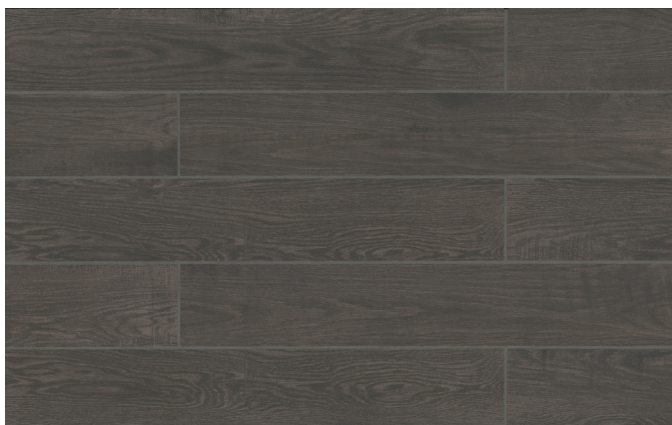


Anthracite - ANT
ELMW00ANT636 - 6"x36" Honed

Woodmark

Glazed Porcelain

Photo Features 6"x36" Field Tile - Honed in Light Oak.


SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		ELMWO0***636	6"x36"	Field Tile - Honed	6	8.72

ANSI TECHNICAL SPECIFICATIONS


	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	N/A	Unaffected	N/A	Pass (1,300 ISO)	≤ 0.5%	Unaffected

Shade Variation




APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	●	◻	◻	●	◻	
Light Commercial	●	◻	◻	●	◻	
Commercial	●	◻	◻	●	◻	



LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ⊘ Applications & ANSI Technical Specifications do not apply
- * Special Order only



Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook for installation guidelines.

The TCNA does not rate products for exterior floors. Project specifier must determine product suitability for exterior floor applications by evaluating specific project conditions, type of use, traffic, drainage, expected contaminants (such as water, oil, grease, etc.), wear, maintenance, and manufacturer's specifications and guidelines. Use caution-product may not be suitable for pool decks. Not suitable for ramps. No polished tiles; only textured surfaces may be suitable. Use of a leveling system is strongly recommended.

Images and product samples are representative of a product's potential characteristics. There is no guarantee that the sample product or images will 100% match the product received. Field and trim tile may not be an exact match. We reserve the right to make changes to product specifications at any time without notice. Tiles are subject to variations in color, shade, sizing, surface texture and finish. Prior to installation, installer must blend tiles from several different boxes to achieve an even distribution of color range. Installer must conduct a dry mock layout under proper lighting conditions prior to installation. It is the consumer's responsibility to inspect the product prior to installation to ensure satisfaction. Once installed, the product is deemed accepted. Reference the most current TCNA Handbook, ANSI, manufacturer's specifications, and the Bedrosians Care & Maintenance guide for installation, outdoor use, care and maintenance information. Improper installation, application, and/or use voids warranty. Please visit www.bedrosians.com for current product information.





Woodmark

Glazed Porcelain


Photo Features 6"x36" Field Tile - Honed in Oak.

SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		ELMWOO***636	6"x36"	Field Tile - Honed	6	8.72


ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥ 0.42	N/A	Unaffected	N/A	Pass (1,300 ISO)	≤ 0.5%	Unaffected




APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	●	◻	◻	●	◻	
Light Commercial	●	◻	◻	●	◻	
Commercial	●	◻	◻	●	◻	



LEGEND

- ◻ Product rated for Interior & Exterior use
- Product rated for Interior use only
- † May be suitable for Exterior Floors
- ⊘ Applications & ANSI Technical Specifications do not apply
- * Special Order only



Minimum grout joint must be 3/16 inch. Please refer to the most current TCNA Handbook for installation guidelines.

The TCNA does not rate products for exterior floors. Project specifier must determine product suitability for exterior floor applications by evaluating specific project conditions, type of use, traffic, drainage, expected contaminants (such as water, oil, grease, etc.), wear, maintenance, and manufacturer's specifications and guidelines. Use caution-product may not be suitable for pool decks. Not suitable for ramps. No polished tiles; only textured surfaces may be suitable. Use of a leveling system is strongly recommended.

Images and product samples are representative of a product's potential characteristics. There is no guarantee that the sample product or images will 100% match the product received. Field and trim tile may not be an exact match. We reserve the right to make changes to product specifications at any time without notice. Tiles are subject to variations in color, shade, sizing, surface texture and finish. Prior to installation, installer must blend tiles from several different boxes to achieve an even distribution of color range. Installer must conduct a dry mock layout under proper lighting conditions prior to installation. It is the consumer's responsibility to inspect the product prior to installation to ensure satisfaction. Once installed, the product is deemed accepted. Reference the most current TCNA Handbook, ANSI, manufacturer's specifications, and the Bedrosians Care & Maintenance guide for installation, outdoor use, care and maintenance information. Improper installation, application, and/or use voids warranty. Please visit www.bedrosians.com for current product information.

