
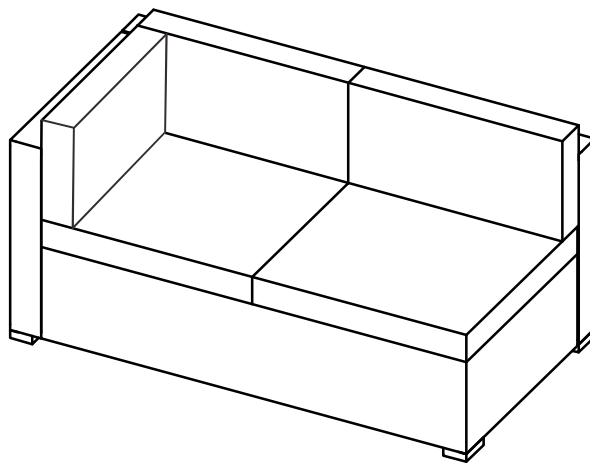







Outdoor Wicker Corner Loveseat with Interchangeable Arm








PART LIST




A 	B 	C 	D 	E 
Interchangeable Arm Panel 1 PC	Back Panel 1 PC	Seat Panel 1 PC	Side Panel 1 PC	Cover of Seat Cushion * 2 PCS
F 	G 	H 	I 	J 
Core of Seat Cushion 2 PCS	Cover of Back Cushion * 2 PCS	Core of Back Cushion 2 PCS	Cover of Side Cushion * 1 PC	Core of Side Cushion 1 PC

*Please note cushion covers will ship separately.

HARDWARE LIST


#1 	#2 	#3 	#4 	#5 
M6*30mm	M6*35mm	M6*50mm	M6mm	D 18mm
Short Bolt 3 PCS	Medium Bolt 4 PCS	Long Bolt 11 PCS	Nut 15 PCS	Washer 25PCS
#6 	#7 	#8 	#9 	#10 
D 12mm	M6mm	M6mm		
Small Washer 4 PCS	Wrench 1 PC	Allen Key 1 PC	L Foot 2 PCS	Plastic Clip 2 PCS

EXTRA HARDWARE LIST

#1	#2	#3	#4	#5
				
M6*30mm	M6*35mm	M6*50mm	M6mm	D 18mm
Short Bolt 1 PC	Medium Bolt 1 PC	Long Bolt 1 PC	Nut 1 PC	Washer 1 PC
#6				
				
D 12mm				
Small Washer 1 PC				


Step 1. Lay back panel (part B) down on a soft flat surface, such as carpet, as shown below. Attach interchangeable arm panel (part A) to left or right side (depending on preference) of back panel (part B) using long bolts(part #3),washers(part #5),nuts (part #4),wrench(part #7) and allen key (part #8).

NOTE:Please do not fully tighten bolts until unit is fully assembled.

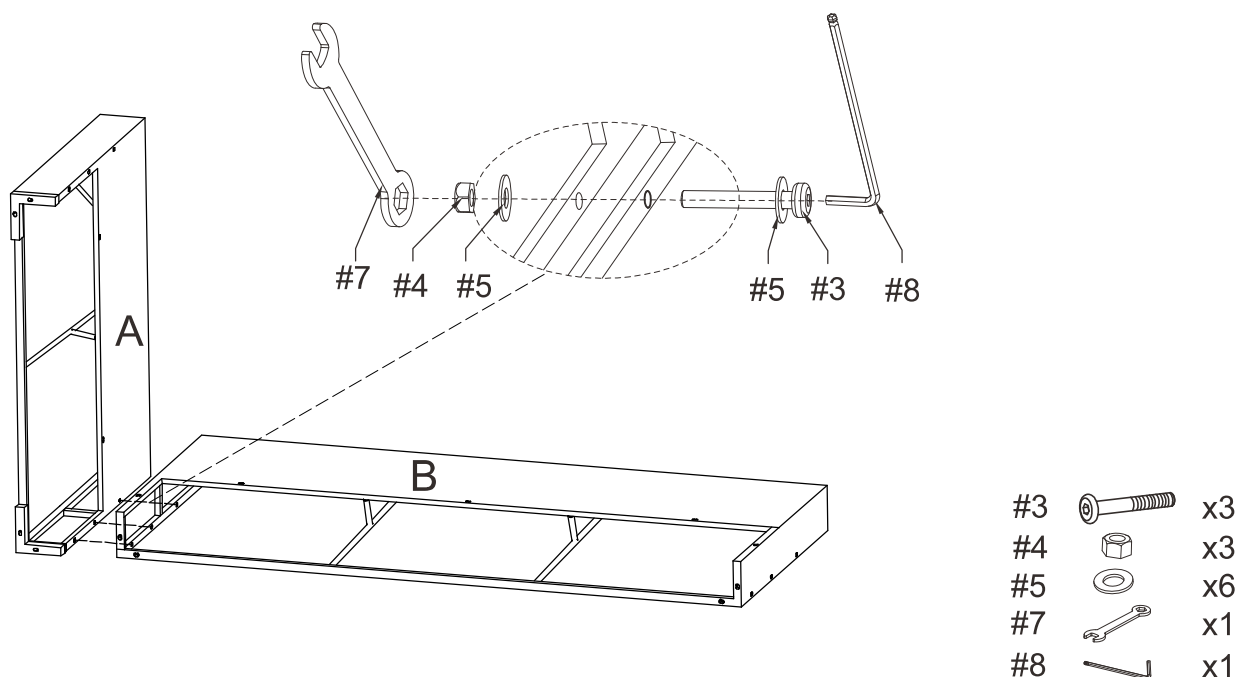


Step 2. Attach seat panel (part C) to assembled unit (parts A&B) using long bolts (part #3), washers (part #5) ,nuts (part #4),wrench (part #7) and allen key (part #8).

NOTE:Please do not fully tighten bolts until unit is fully assembled.

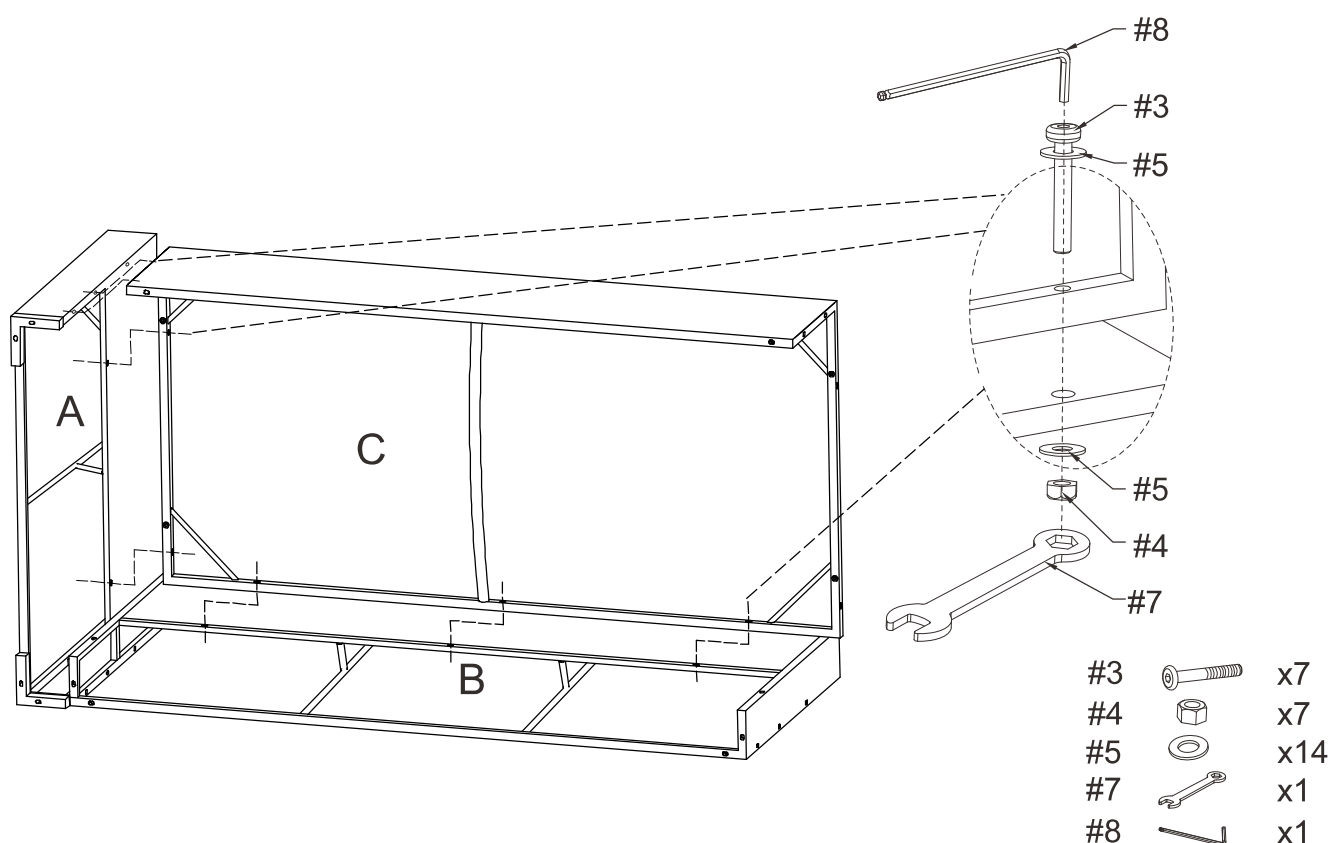


Step 3. Attach side panel (part D) to back panel (part B) and seat panel (part C) using short bolts (part #1), long bolt (part #3), washers (part #5), nuts (part #4), wrench (part #7) and allen key (part #8).

NOTE: Please do not fully tighten bolts until unit is fully assembled.

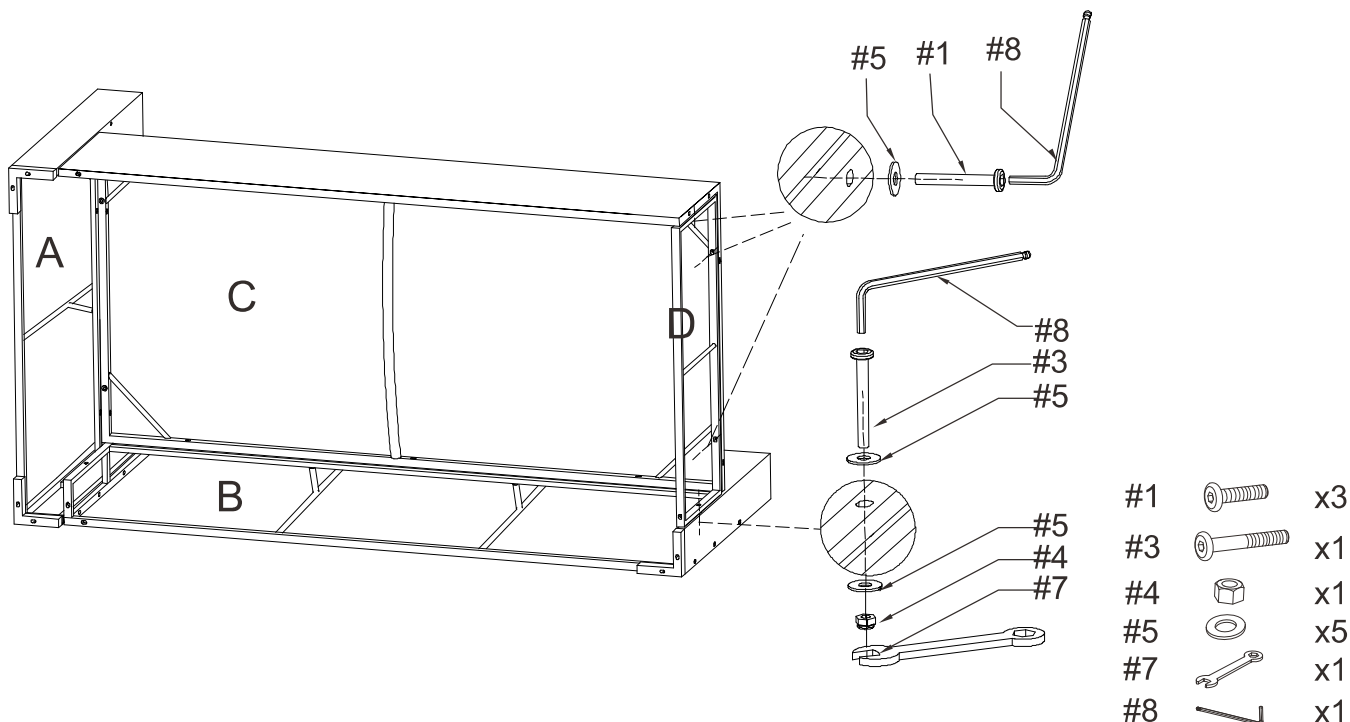


Step 4. Attach L foot (part #9) to assembled unit (parts B,C&D) using medium bolts (part #2) small washers (part #6), nuts (part #4), wrench (part #7) and allen key (part #8).


NOTE: Please fully tighten all bolts at this time.

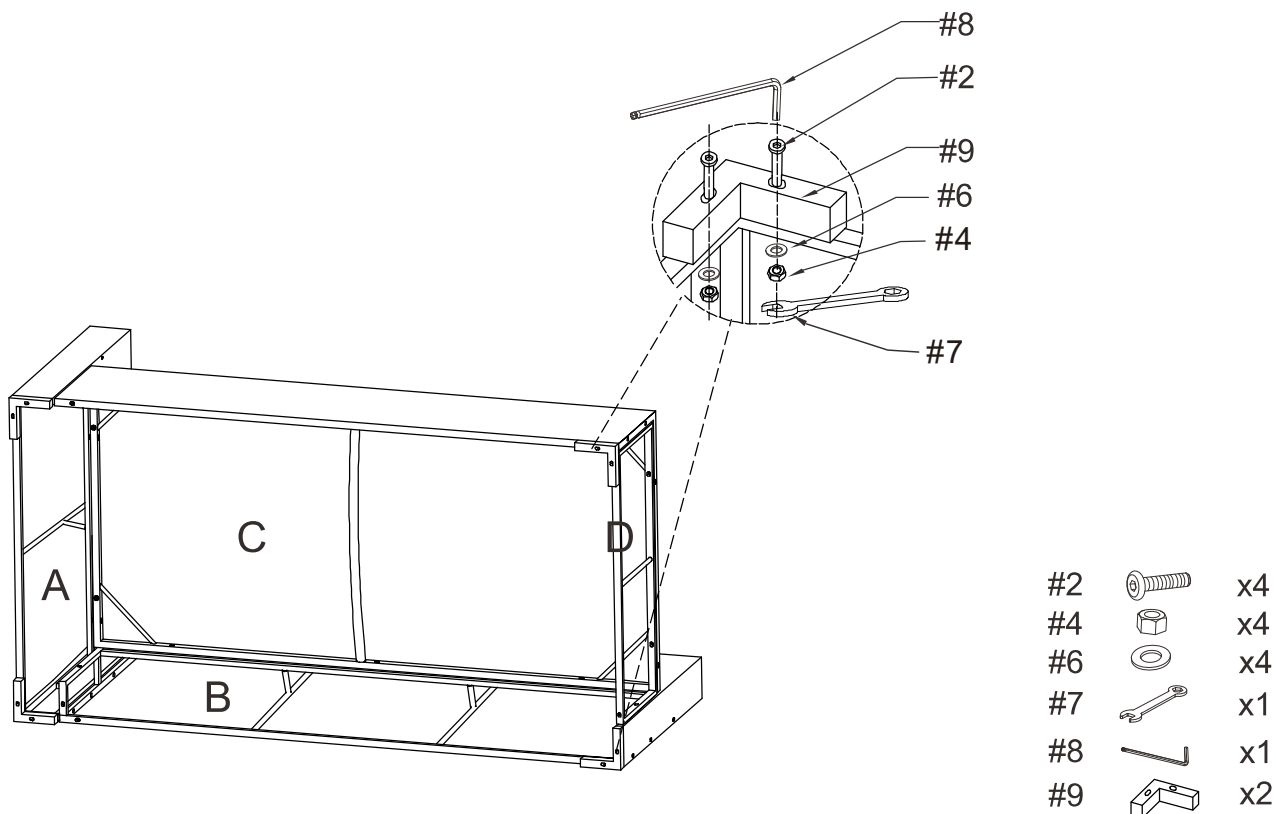

Step 5. Insert core of seat cushion (part F) into cover of seat cushion (part E).
Insert core of back cushion (part H) into cover of back cushion (part G).
Insert core of side cushion (part J) into cover of side cushion (part I).

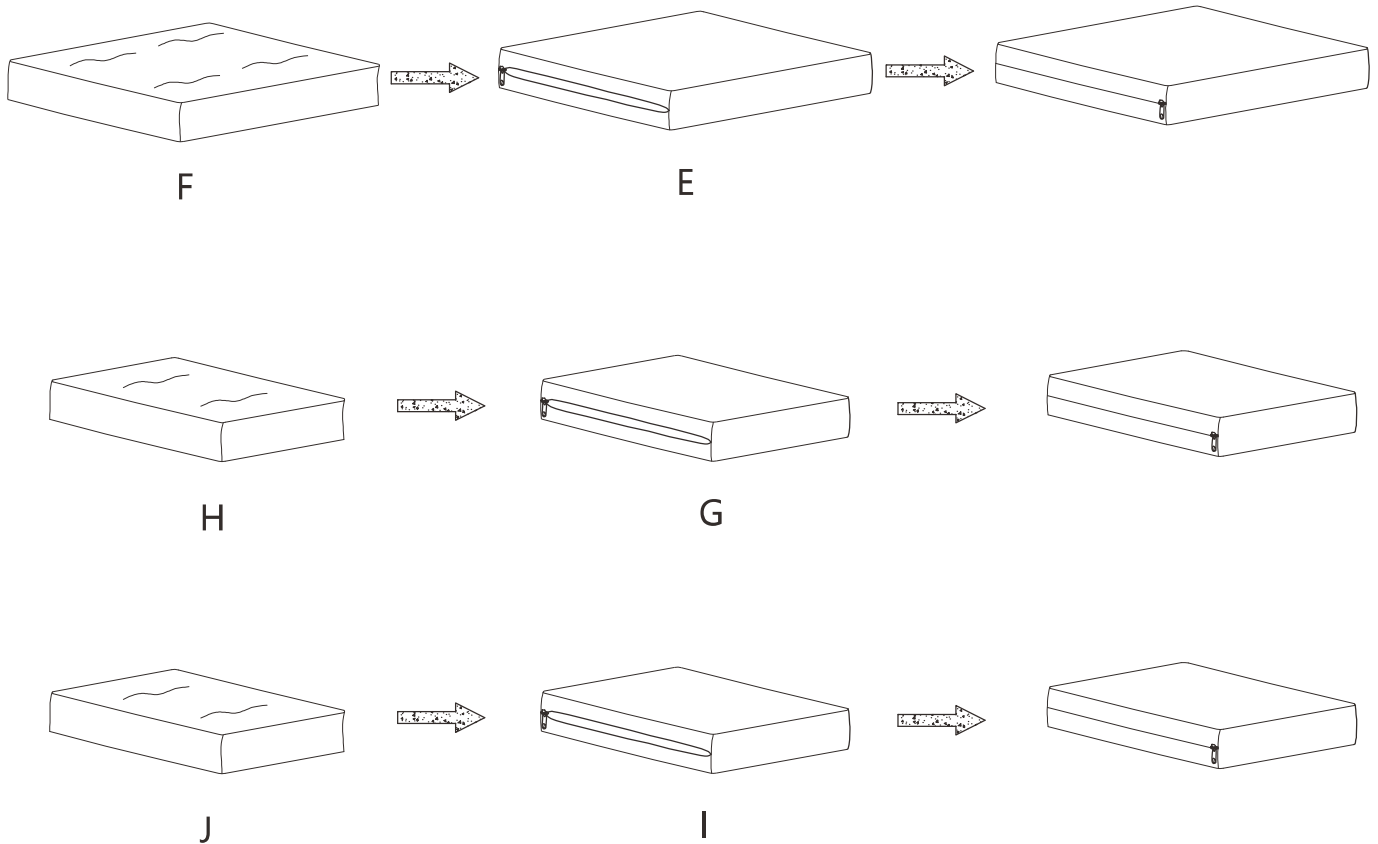

Step 6. Carefully turn the assembled loveseat upright and add cushions as shown below.

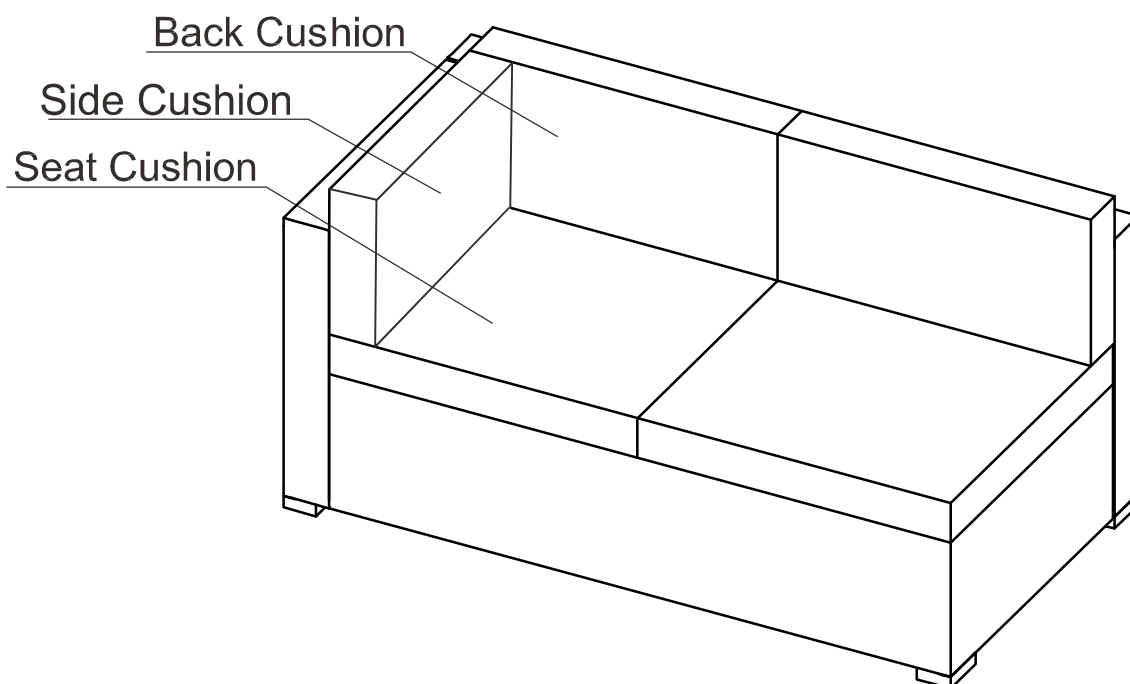

Step 7. Use plastic clips (part #10) to secure additional units together as shown.

