INSTALLATION GUIDE

WARNINGS AND CAUTIONS

Released Date:2026-01

READ AND SAVE THESE INSTRUCTIONS

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Tum off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

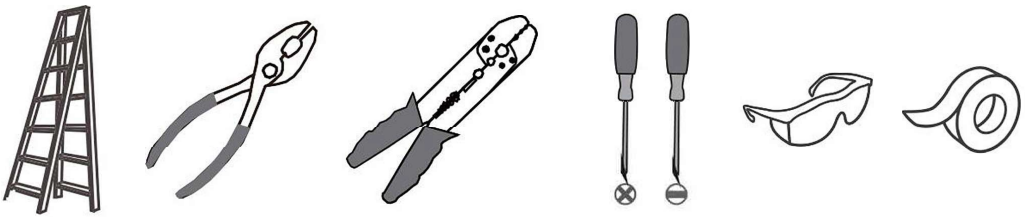

CARE AND MAINTENANCE

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance contact our After Customer Care at
we will reply you in 24 hours.


PACKAGE CONTENTS



C Ceiling Canopy
x 1




D Threaded Tube
x 4

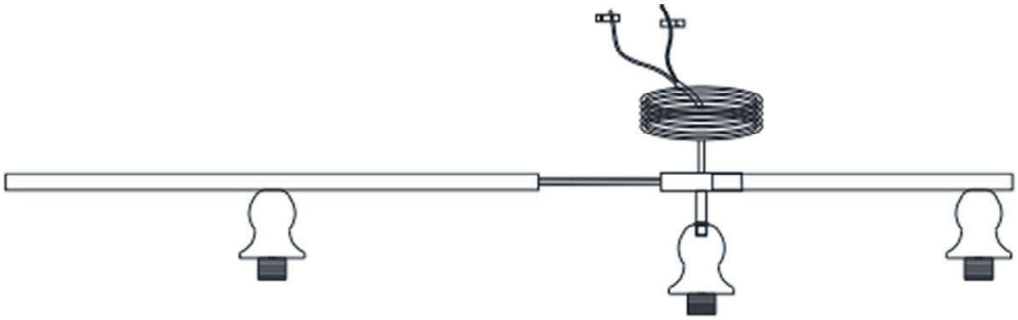


A Fixture Body with Wire A
x 1



E Fixed bend pipe
x 2




F Fixture Body with Wire B
x 1




B Glass Shade
x 5

PACKAGE CONTENTS (PARTS BAG 1)



AA Wire Connector
x 4



BB Screw
x 4



EE Mounting Bracket
x 1



CC Wall Anchor
x 4




DD Mechanical Screw
x 2

INSTALLATION


1

1. Unscrew the screws on Fixture Body with Wire A and Fixture Body with Wire B
2. Pass the wires from both fixture bodies through the Fixed bend pipe

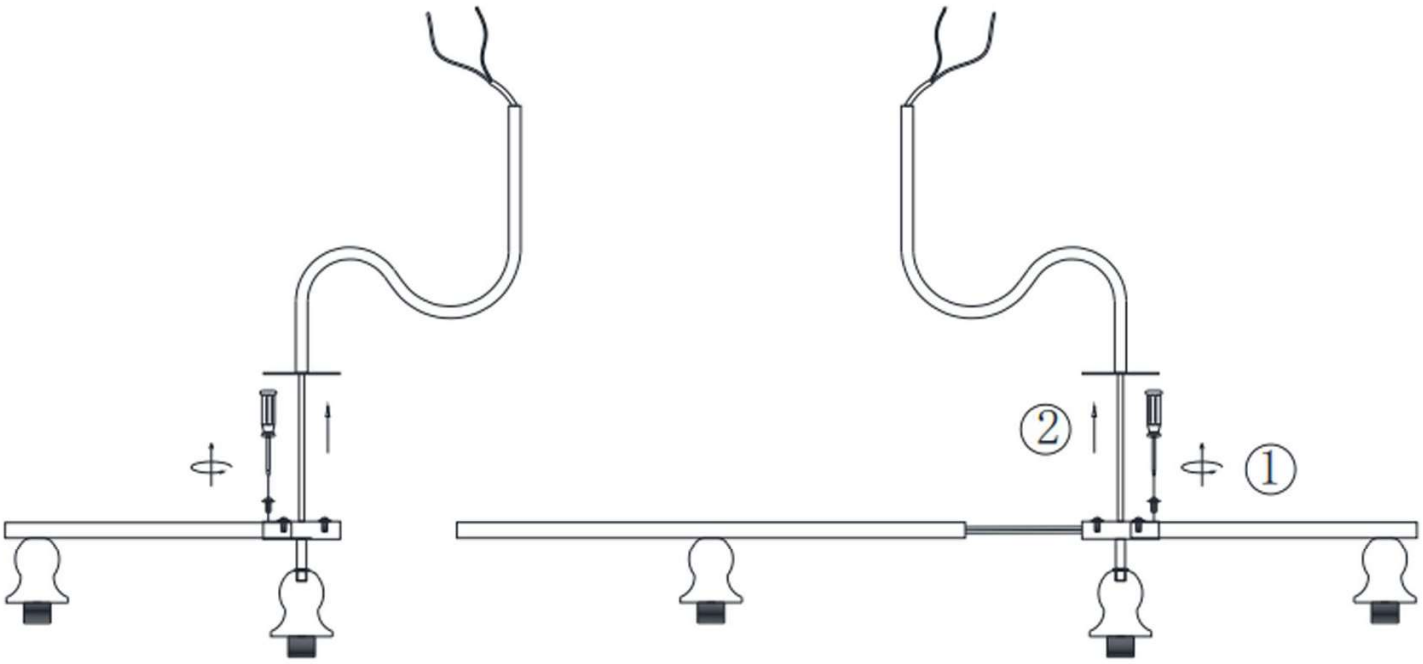

2


1. connect the socket rod shown in Diagram 1 to Fixture Body with Wire A
2. Insert the Fixed bend pipe into Fixture Body with Wire A as shown in Diagram 2
3. Use screws to secure the 2 parts together

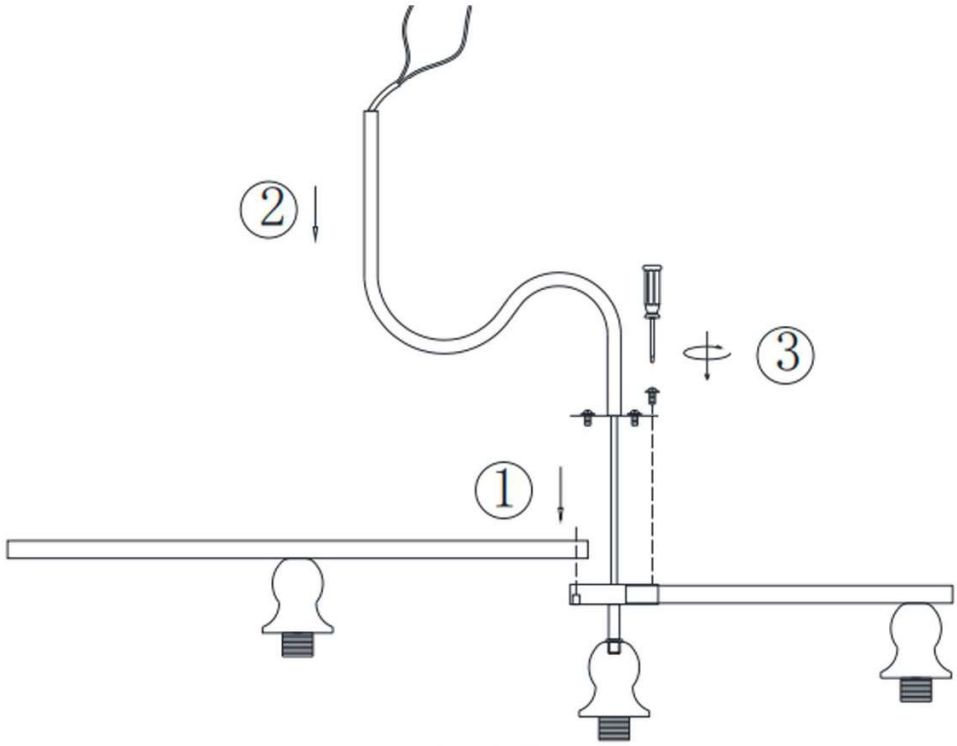

INSTALLATION

3


1. Connect the socket rod used in Step 2.1 to Fixture Body with Wire B as shown
2. Insert the Fixed bend pipe into Fixture Body with Wire B as shown in Diagram 2
3. Use screws to secure the two parts together

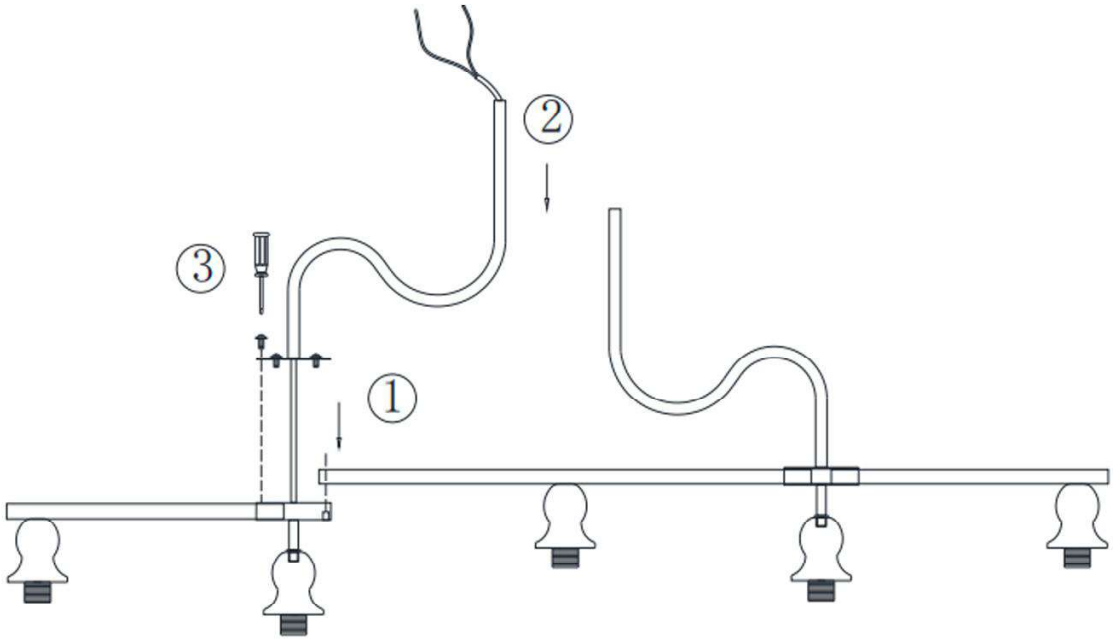


4

1. Choose the appropriate length and use 2 or 4 Threaded Tubes


2. Pass the power wire through the Threaded Tube and ceiling canopy then tighten the Threaded Tube to the Fixed bend pipe

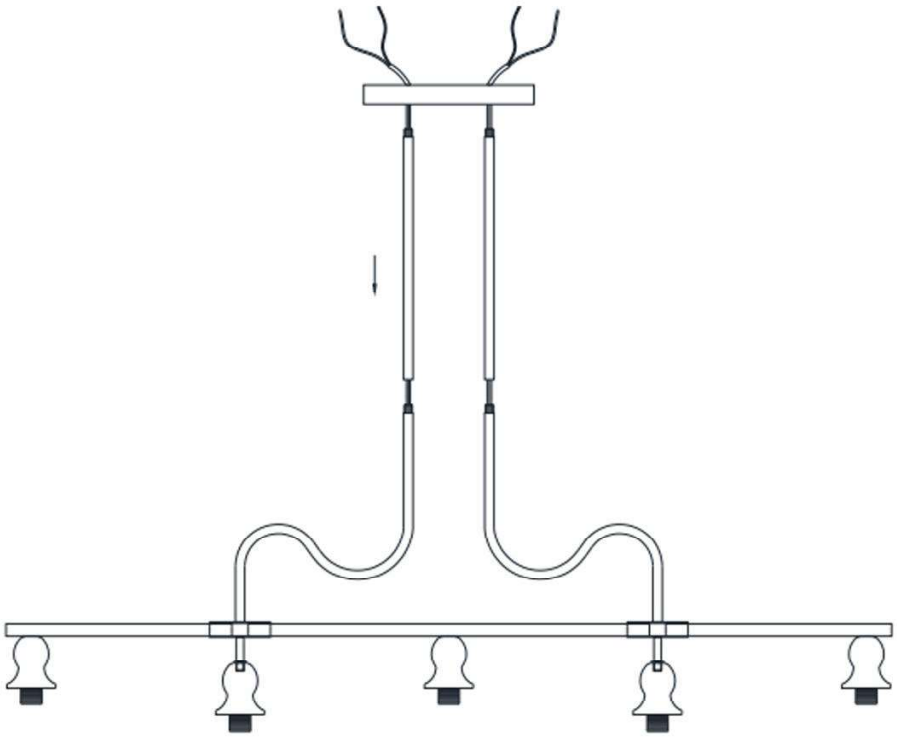


5 Insert the disc, washer and nut in order through the power wire and Threaded Tube, and tighten them

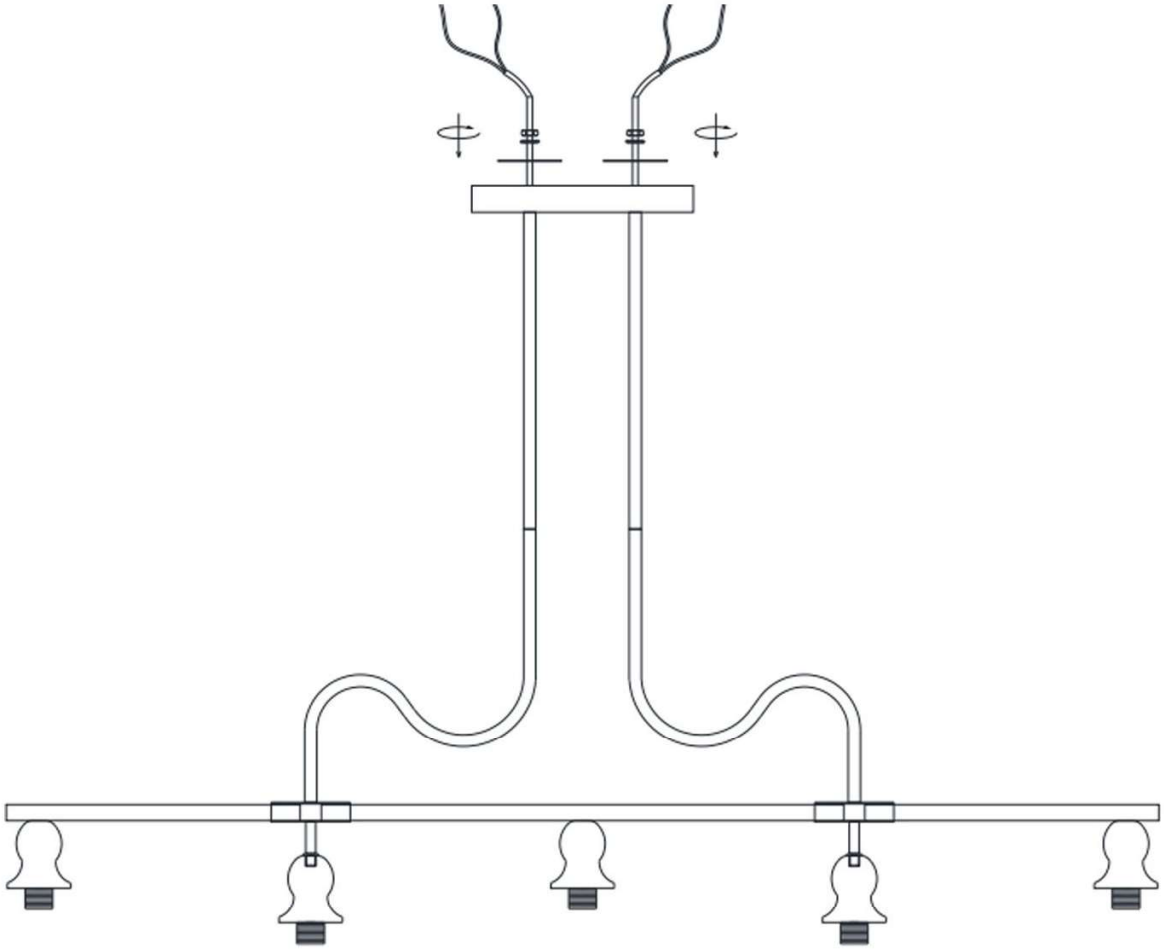


6 1. Unscrew the nuts ❶ on both sides of the ceiling canopy
2. Take out the mounting bracket ❷

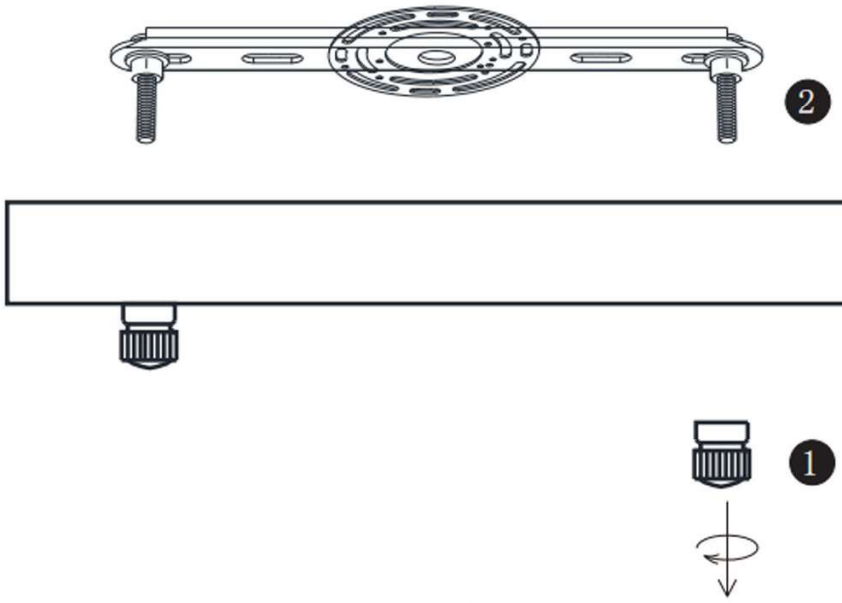


7 Install the Mounting Bracket

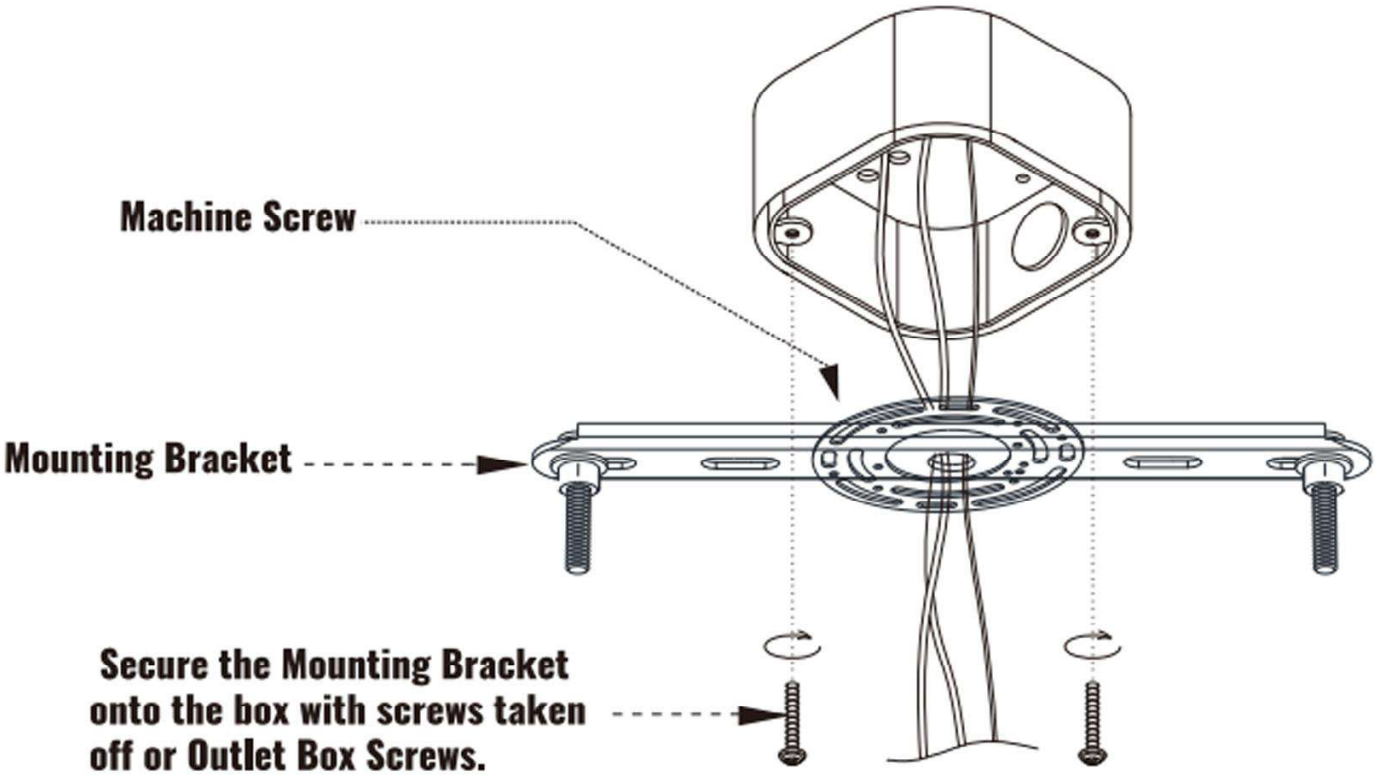

8 Wiring

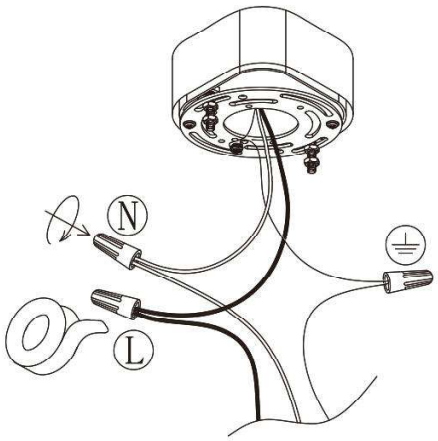


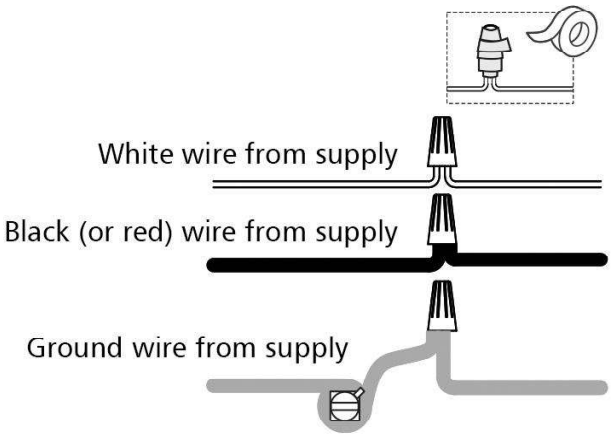

Step 1: Connect the wires from the fixture to the house supply wires nuts, ground wire (green, green/yellow, or bare) to ground wire, neutral wire(white)to neutral wire, and hot wire (black) to hot wire. Wrap the connection with electriacl tape.

Step 2: Spread apart the wires so that the hot wrires are on one side of the outler box and the neutral wires are on the other side.

9 Fix the canopy onto the Mounting Bracket with Cap Nut

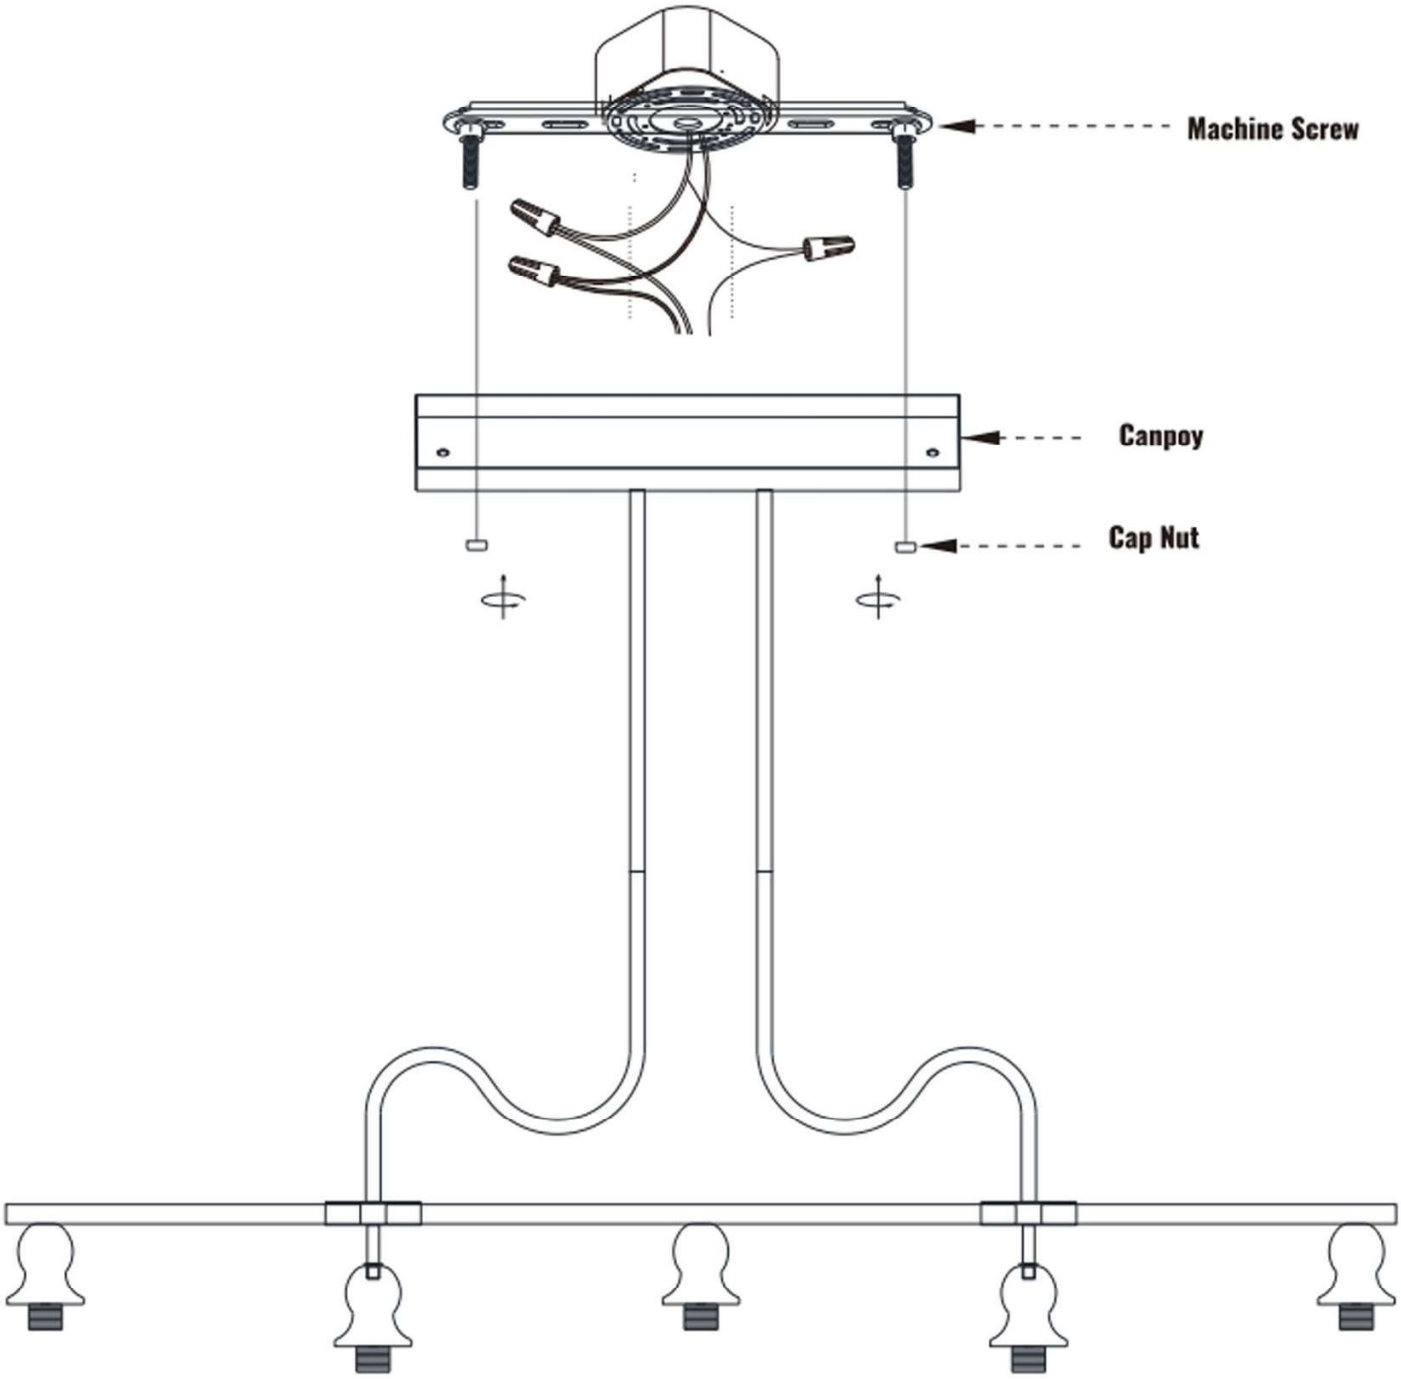

10 Place the glass onto the lamp head, twist the lamp head ring, and install the E12 bulbs (bulbs not included)

