


Assembly & Installation Instructions

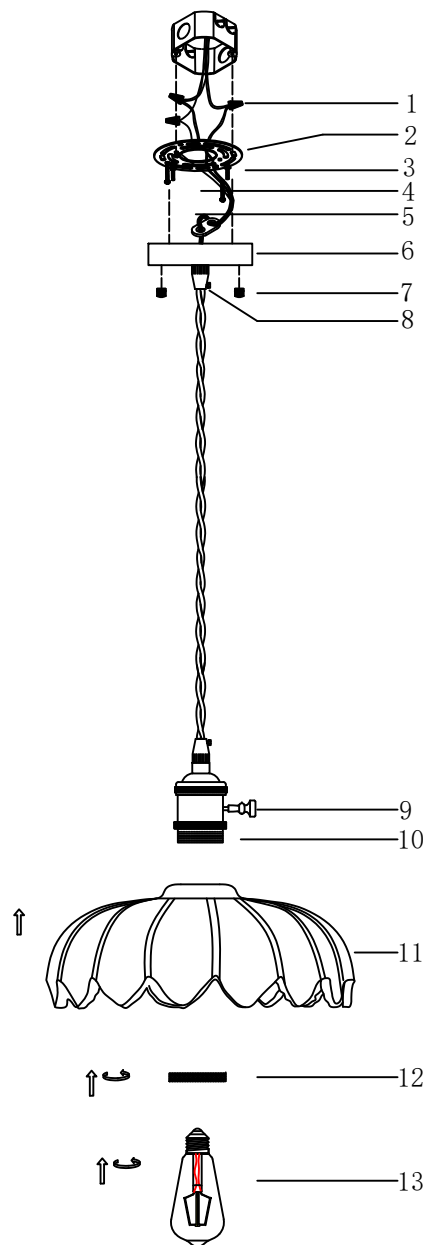

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

- A: Turn off the power supply first.
- B: Loosen the plastic screw (8) to adjust the wire length to the desired height, then tighten the screw securely.
- C: Secure the mounting bracket (2) to the junction box with mounting screws (3).
- D: Connect the wires using wire nuts (1) as follows:
Fixture BLACK wire to home LIVE wire.
Fixture WHITE wire to home NEUTRAL wire.
Attach the fixture ground wire (5) and home ground wire to the mounting bracket using the green screw.
- NOTE: The bare wire can NOT be exposed to prevent leakage.
- E: Secure the canopy (6) to the mounting bracket (2) using the nuts (7).
- F: Use the socket ring (12) to fix the glass shade (11) onto the lamp holder (10).
- G: Install the bulb (not included) (13).
- H: Restore power and operate the fixture using the knob switch (9) located on the lamp holder.