



Anthem+™ | K-28214-ASC

Digital control

Features

- Digital control with easy-to-read icons and configurable touch screen
- Control steam along with temperature and flow for up to 12 shower outlets from a simple, intuitive interface
- Turn the large KOHLER® dial for easy temperature and flow rate adjustment
- Nine user-definable presets let you save your favorite shower settings
- Use with the KOHLER Konnect® app to unlock additional Anthem system features, Kohler-developed experiences, and system updates
- System warm-up and pause feature
- Includes optional flow restrictor, limiting total flow to 1.75 gpm (6.6 lpm), for installations where water conservation or CEC compliance is desired
- Connect up to four controls within your digital shower system
- Pair with optional Anthem remote on/off button; sold separately
- Requires Anthem+ system controller module and an Anthem digital thermostatic valve (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-19-2026 19:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



UL 1951
CSA C22.2 No. 14
CSA C22.2 No. 68
ADA
ICC/ANSI A117.1

Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

Valves

Required Valves: Digital, Thermostatic

Material

- Premium material construction for durability and reliability

Recommended Products/Accessories

K-28213 Remote on/off button for digital thermostatic valve

Required Products/Accessories

- K-28209 Two-port digital thermostatic valve
- K-27756 System controller module

or

- K-28210 Three-port digital thermostatic valve
- K-27756 System controller module


or

- K-28211 Four-port digital thermostatic valve
- K-27756 System controller module

or

- K-28212 Six-port digital thermostatic valve
- K-27756 System controller module



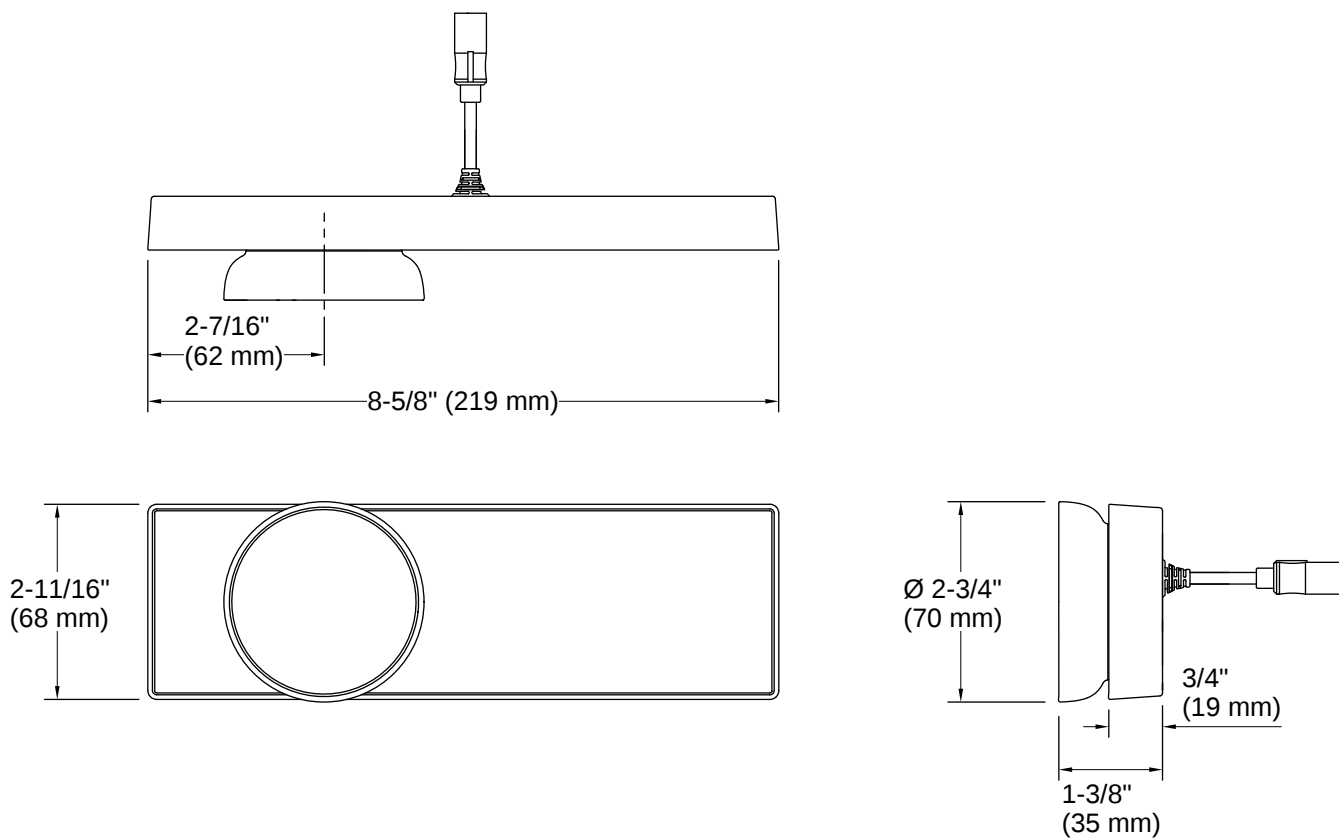

Installation

- After digital control is connected to system controller, valve, and power source, follow on-screen prompts for easy setup; no Internet needed
- Wall-mount

Installation Notes

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.

