

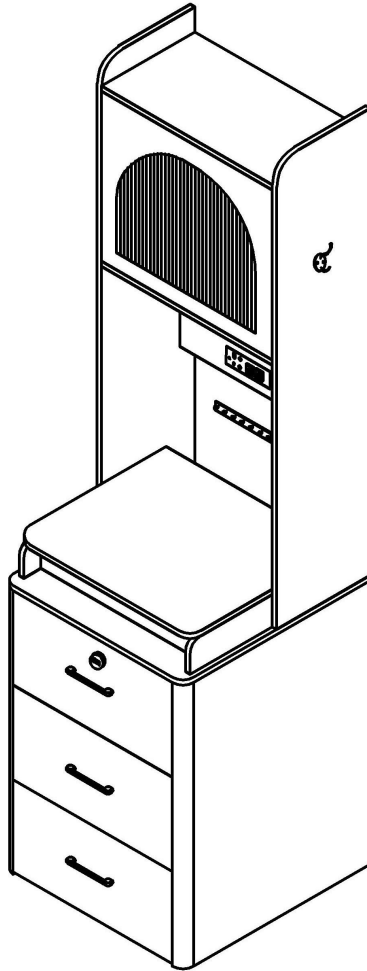
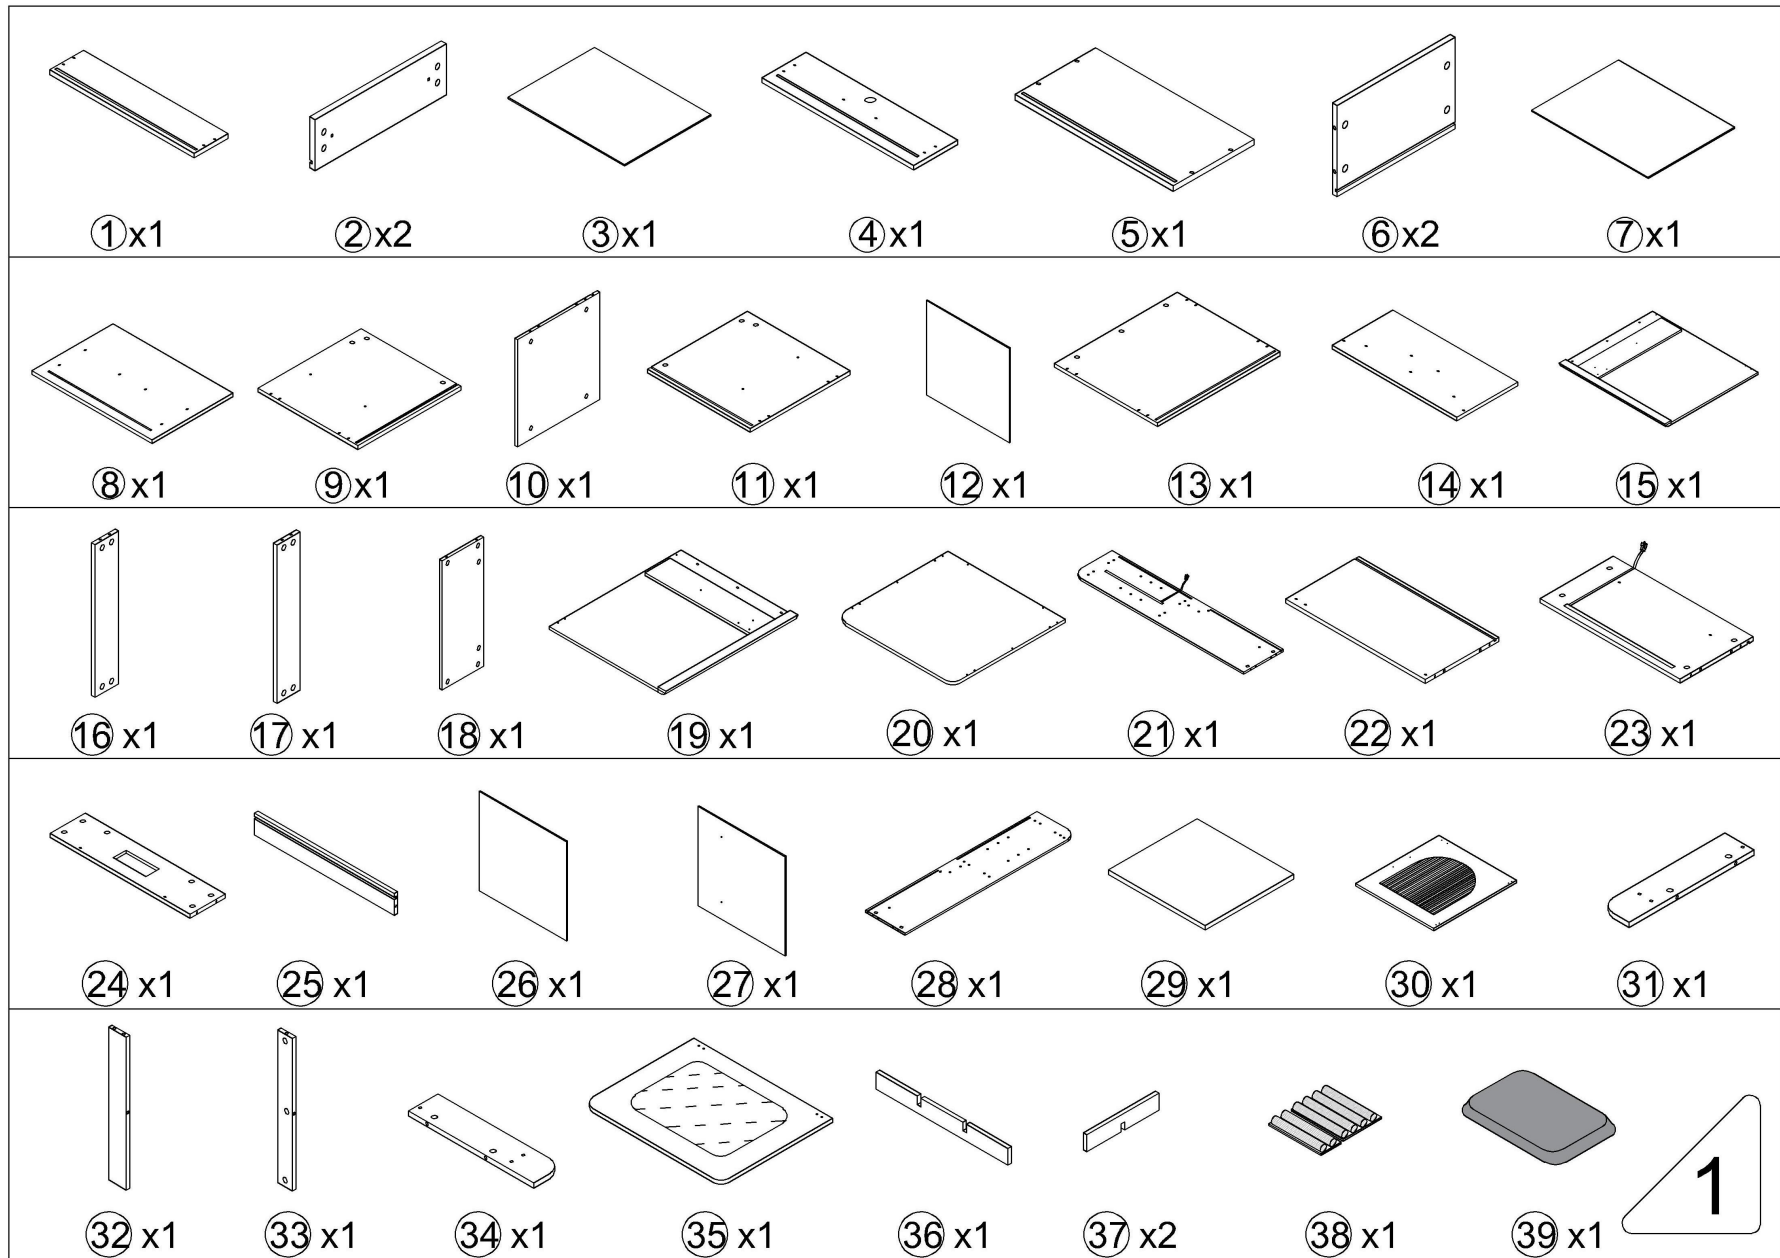

















Product Installation Instructions






A		Two In One Screw (6x28mm)	83pcs +6pcs	J		Non-slip pads	11pcs +3pcs
B		Two In One Nut (10x12mm)	83pcs +6pcs	K		Fixing clip & Screw (3x16mm)	12pcs +2pcs
C		Wood Chipping (6x30mm)	30pcs +4pcs	L		Hook & Screw (3x12mm)	4pcs +1pcs 2pcs
D		Handle & Screw (4x16mm)	8pcs +2pcs 4pcs	M		Laminate Support Nail	4pcs +1pcs
E		Guide & Screw (3x12mm)	20pcs +4pcs 4pcs	N		Double Sided Tape	2pcs
F		Magnetic Attraction & Screw (3.5x12mm)	2pcs +1pcs 1pcs	O		Crystal Hook & Screw (3.5x14mm)	2pcs +1pcs 1pcs
G		Iron Sheet & Screw (3x10mm)	2pcs +1pcs 1pcs	P		Password Locks & Tools	1pcs
H		Cabinet Door Hinge & Screw (3x10mm)	8pcs +2pcs 4pcs	Q	Anti Fall Hardware  x2  x2  x2  x4		
I		Power Socket & Screw (3x10mm)	2pcs +1pcs 1pcs				






**1pcs**





Double-head screwdriver, use as required

2

Product structure decomposition

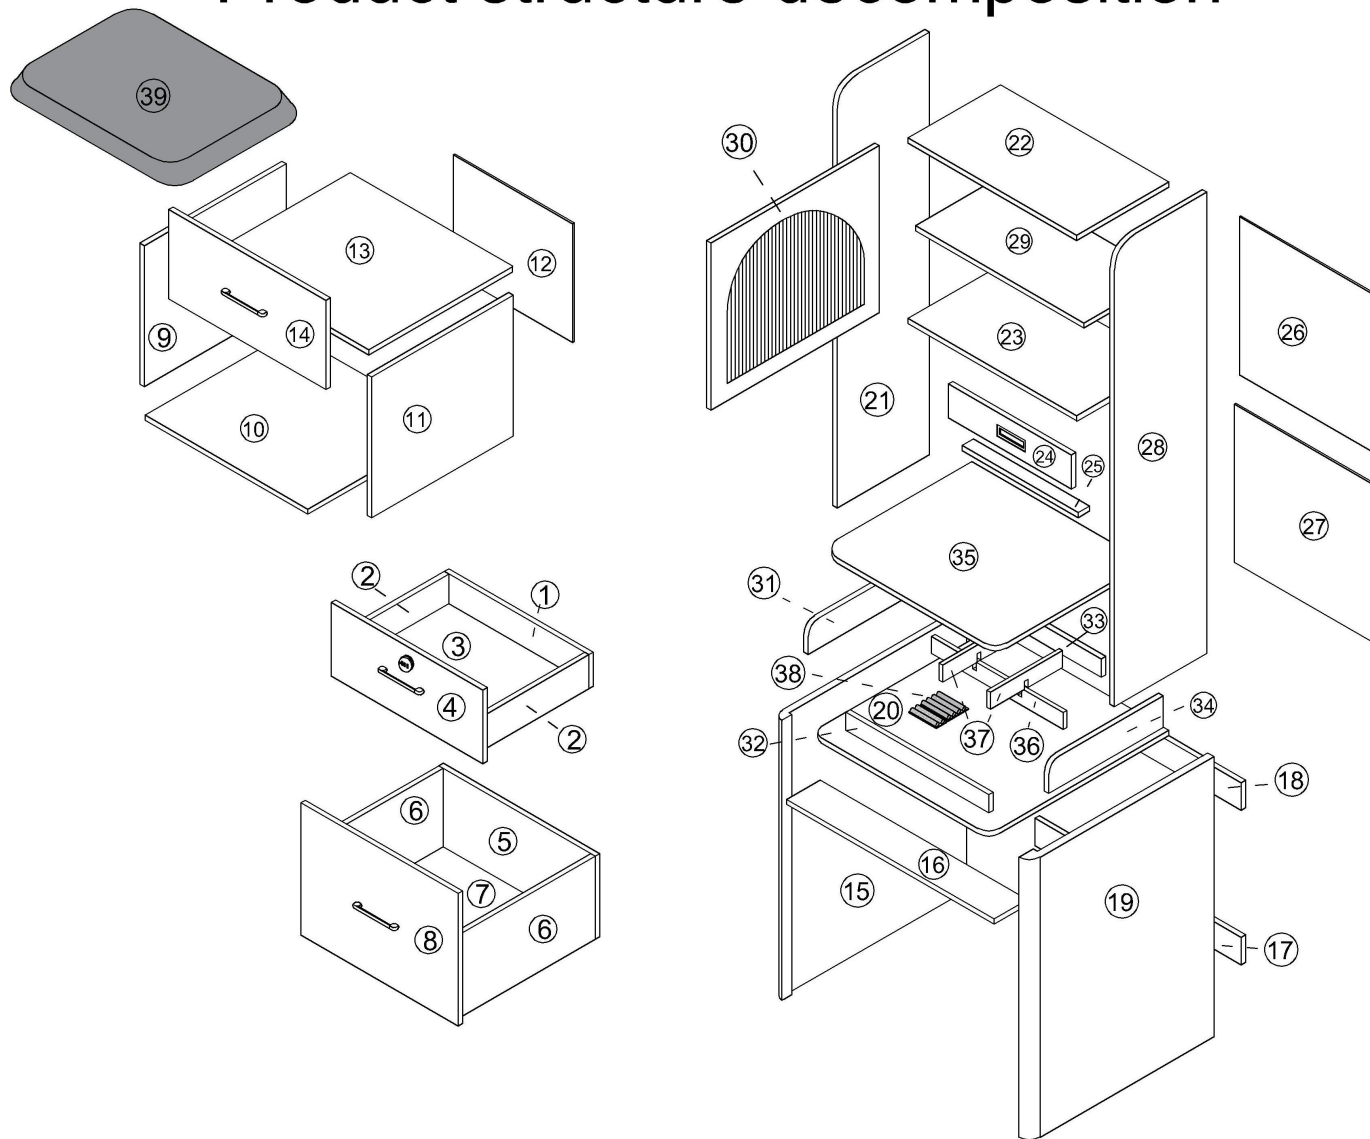


A		29pcs
B		29pcs
C		8pcs
D		6pcs
E		3pcs
E		14pcs
E		4pcs
J		4pcs
K		4pcs
N		2pcs
P		1pcs

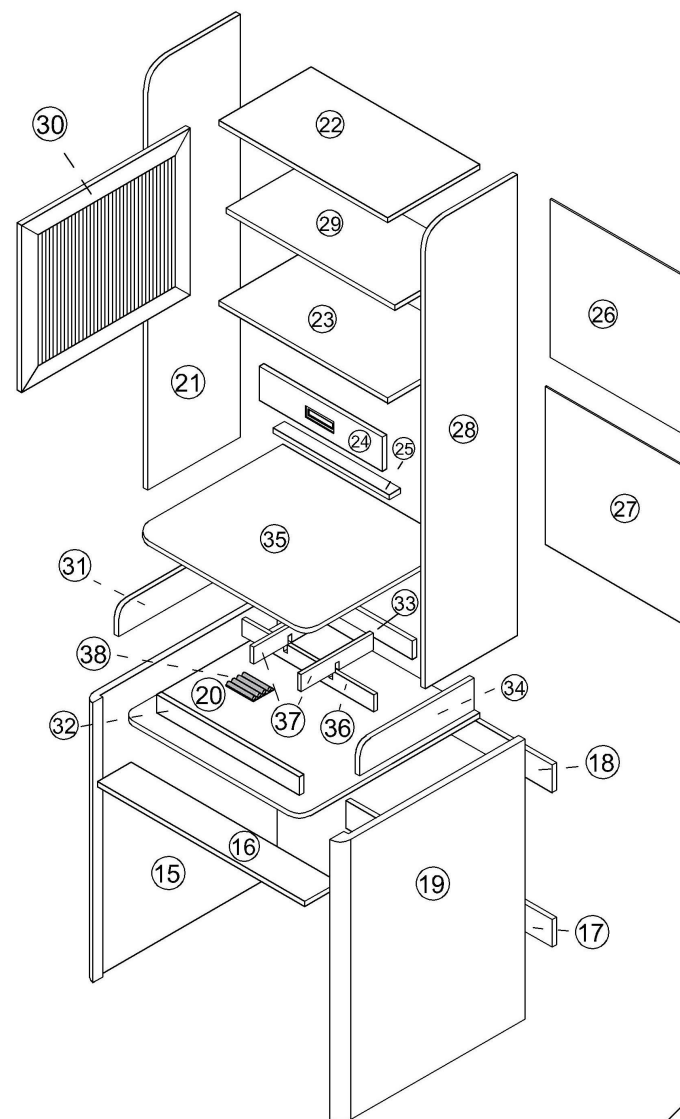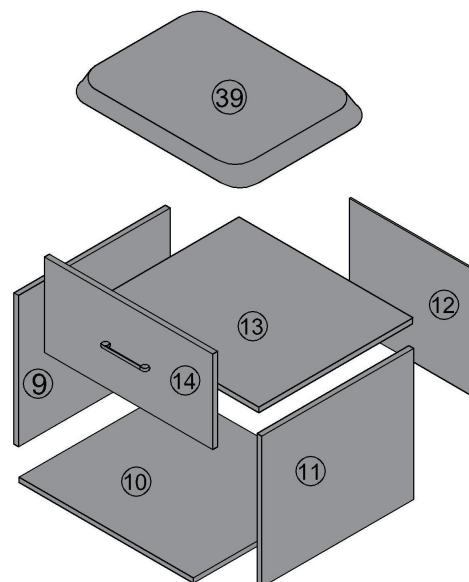


Use parts ① and ②



Step1

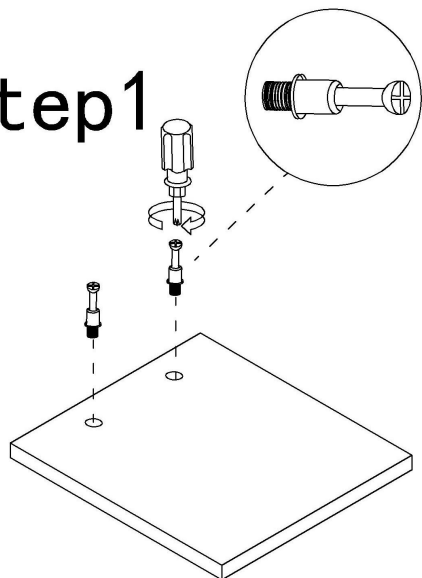


Step2

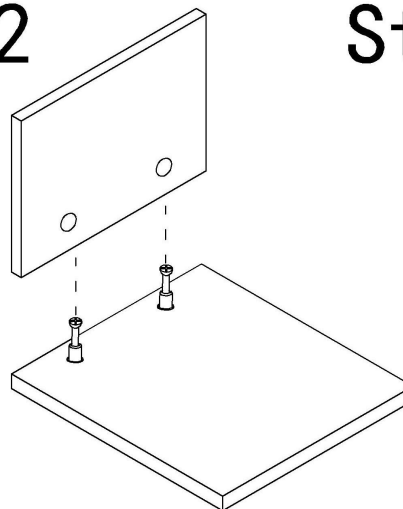

Step3

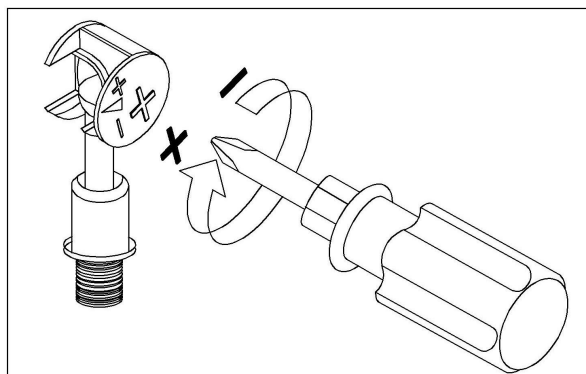
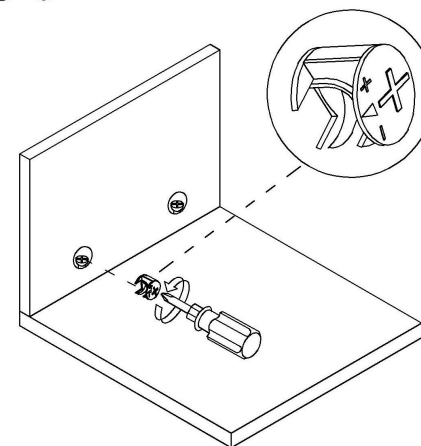


Use a screwdriver to lock in the direction of the "+" sign




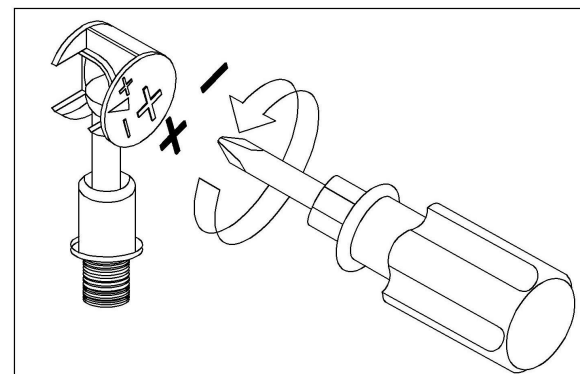


Disassemble along the direction of "-" sign

Step 1

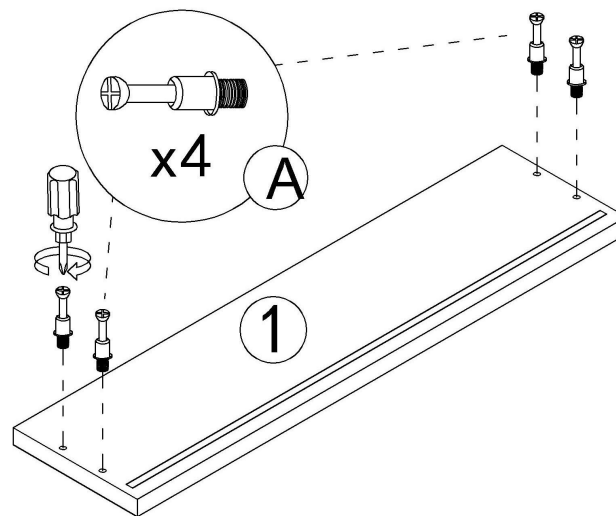


Step 2


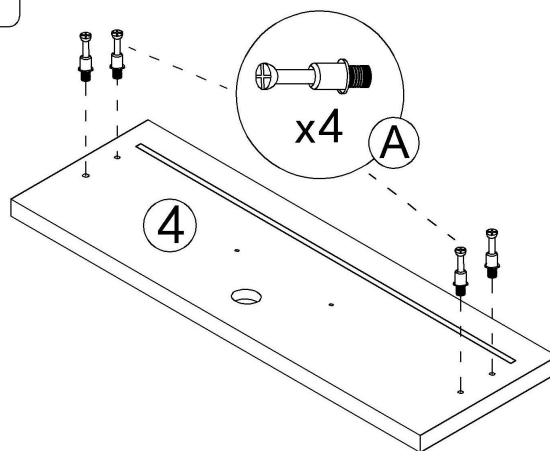


6

Step 3

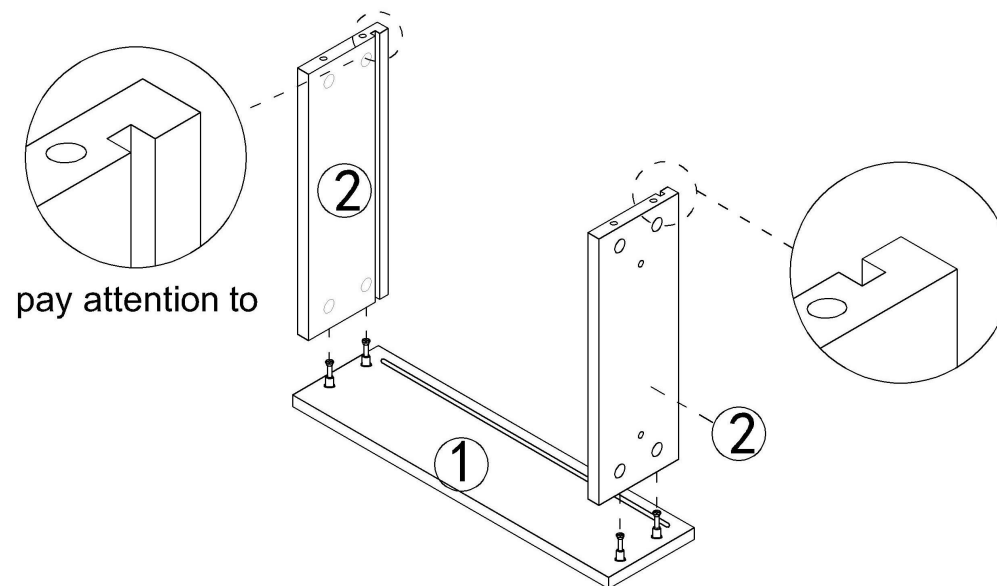


Step 4

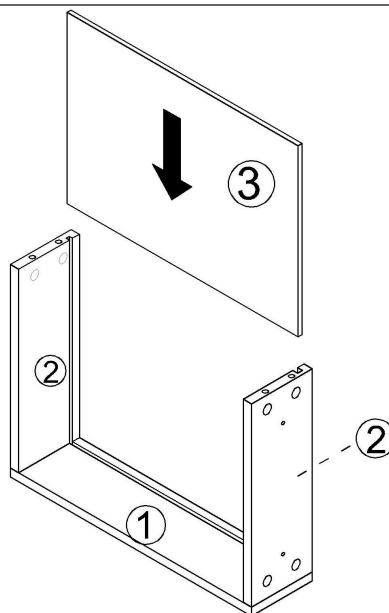


③ x1

The decomposition of the lock

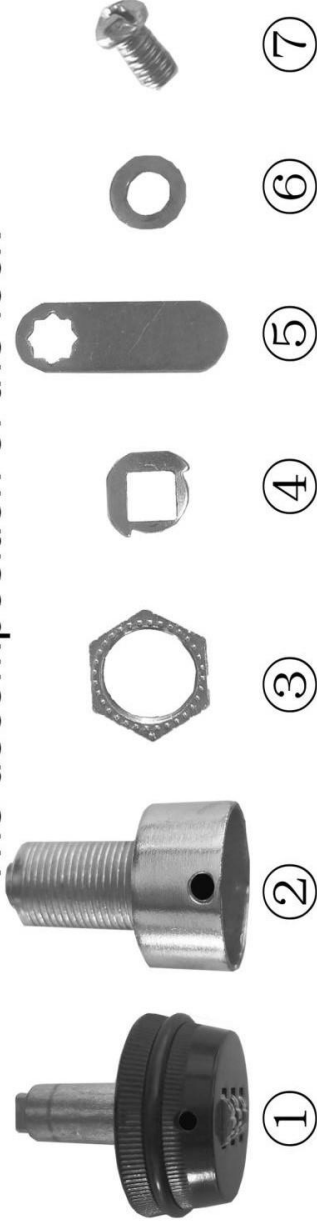


Step1

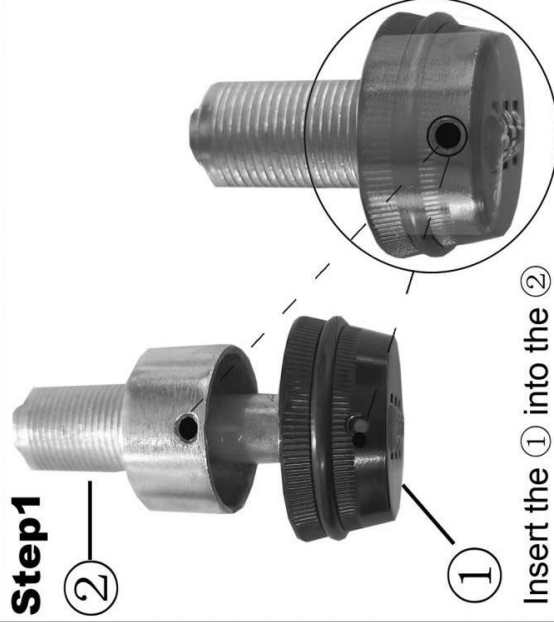

Insert the ① into the ②
Align the two holes

Step2

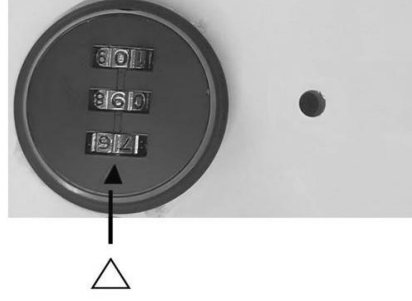


Insert the lock
Note the triangle icon is on the left

Step3




Scramble the password before screwing
Tighten part ③ with a wrench.

Step4

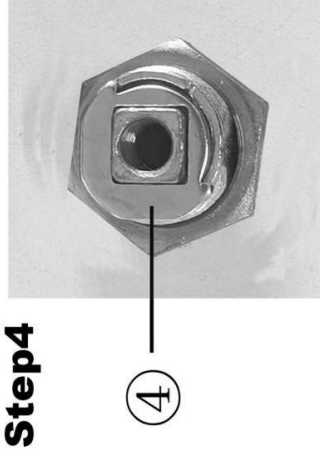



Insert part ④ Rough side down

Step5


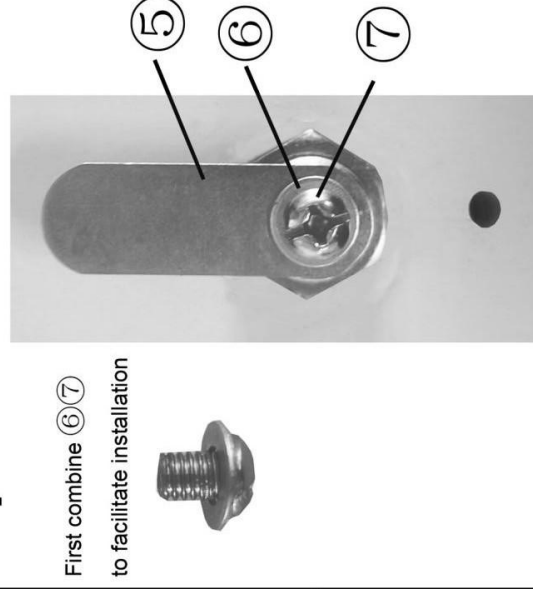


Place the parts in the order of ⑤⑥⑦,
tighten them with a screwdriver.


Step 5

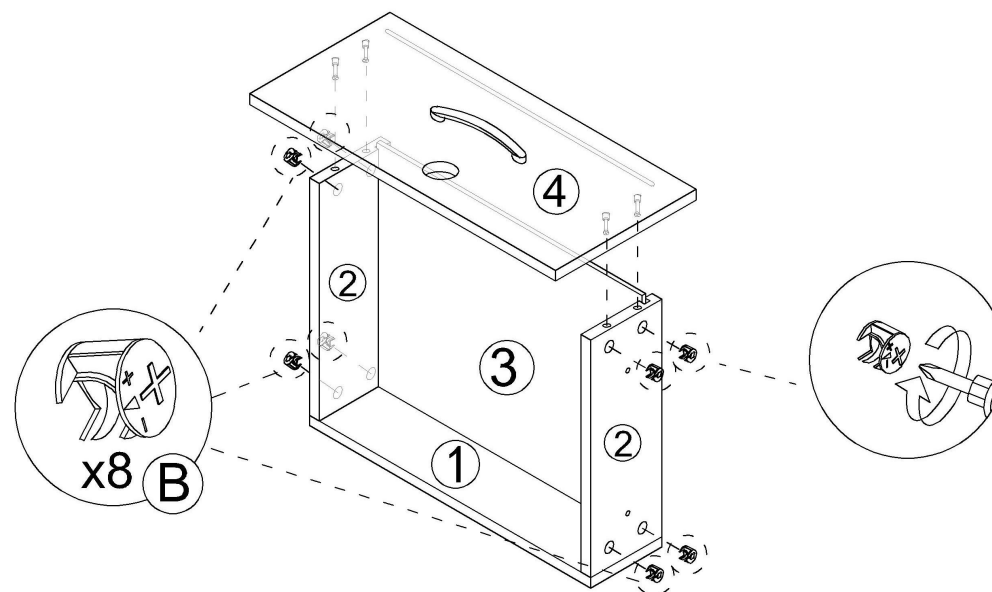


Step 6

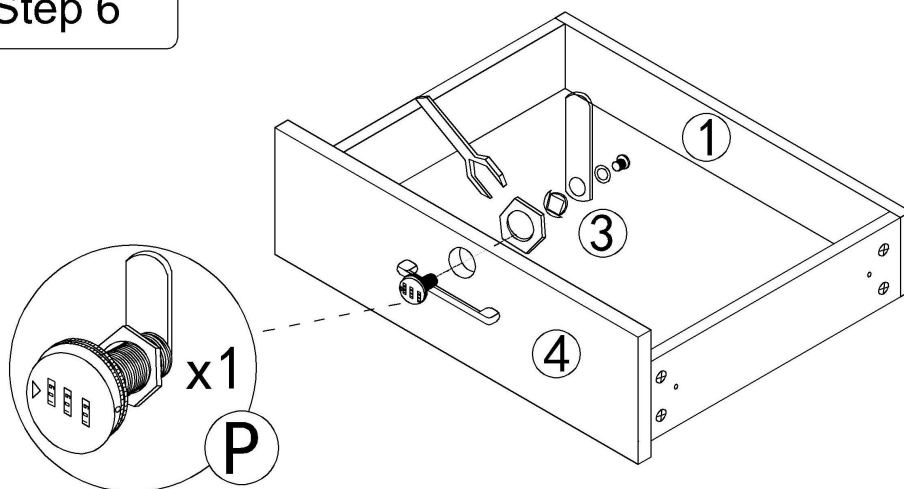

Unlock



lock



How to Change the Password?




The initial password is 000.

- (1). Open the drawer.
- (2). The reset password hole is on the side of the lock.
- (3). When changing the password, use a stick to press the top, and then change the password.

TIPS : The lock password can only be set once, please use your book or cell phone to write down to the new password after setting.



Step 6

Drawer rail breakdown diagram

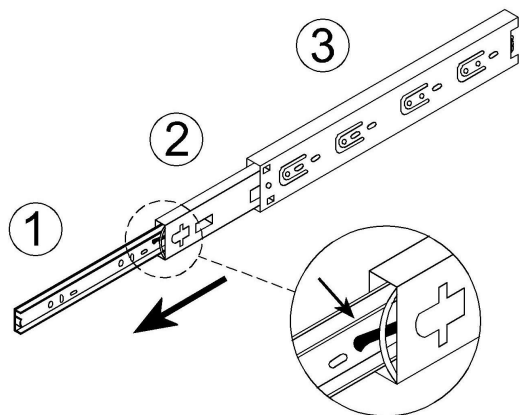



Step 1 : Pull the rails apart

Step 2 : Push the nylon buckle outward ①

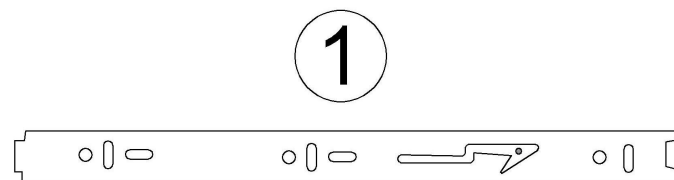

2

3

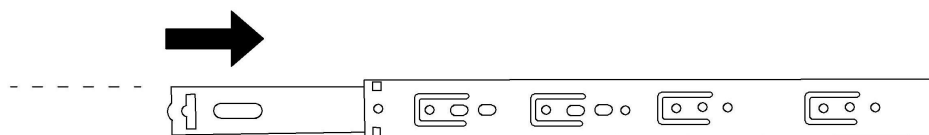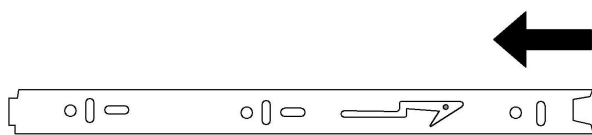





1

2



3

9






Step 7

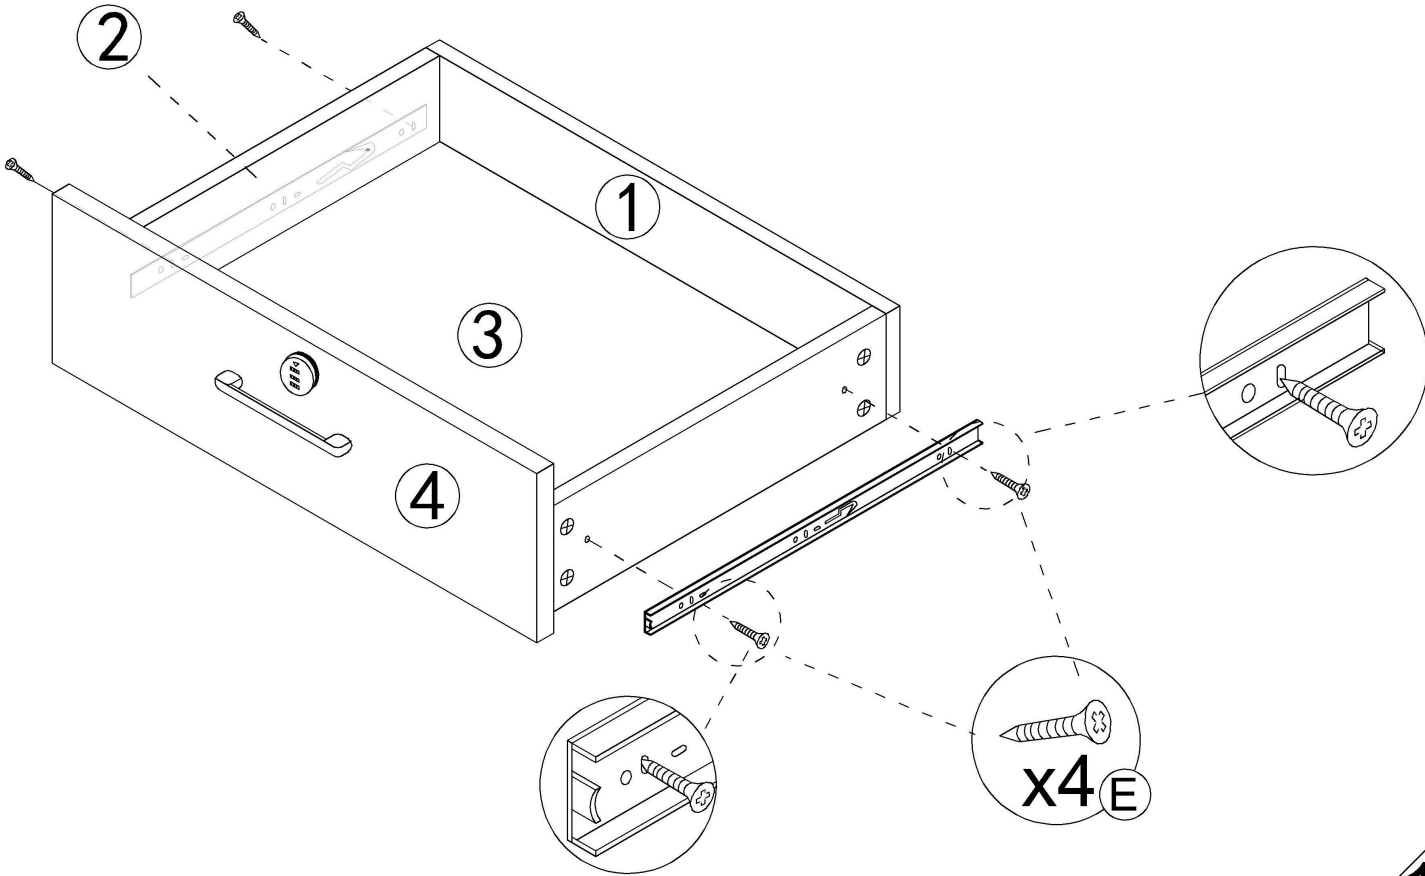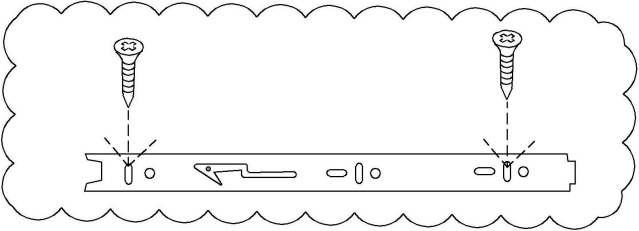


Step 8

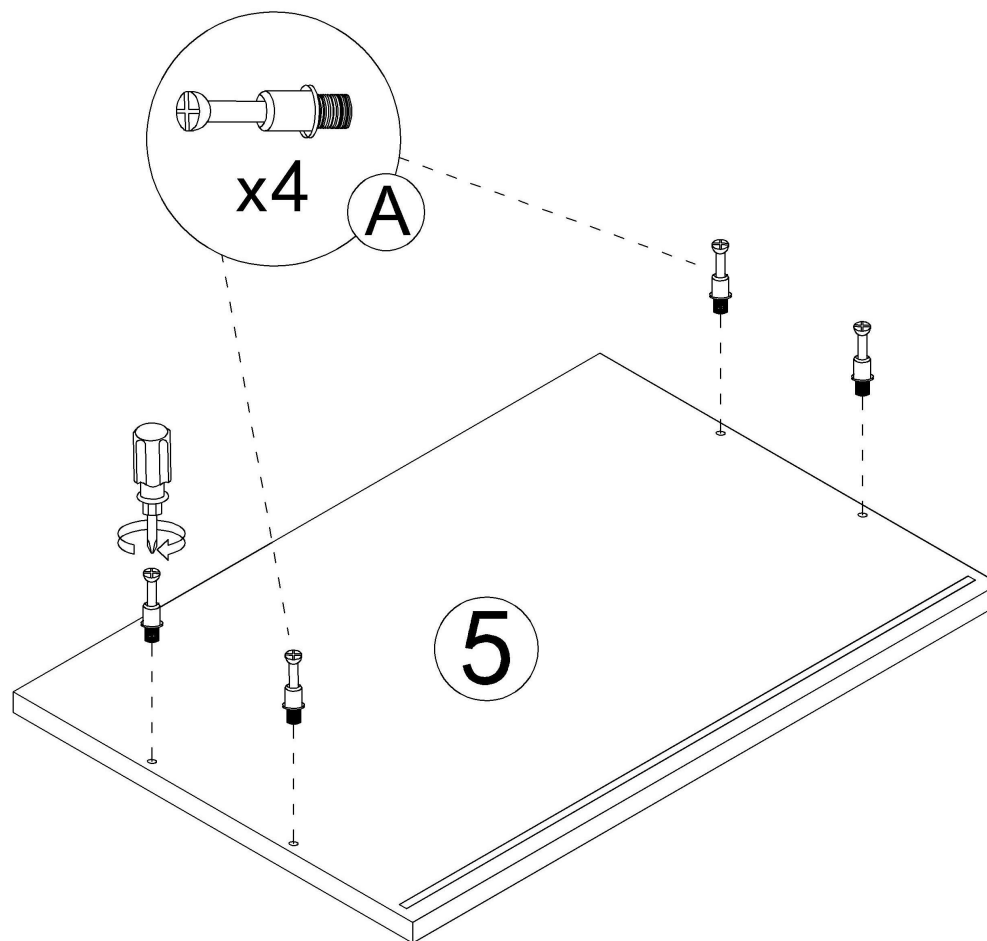


Step 9

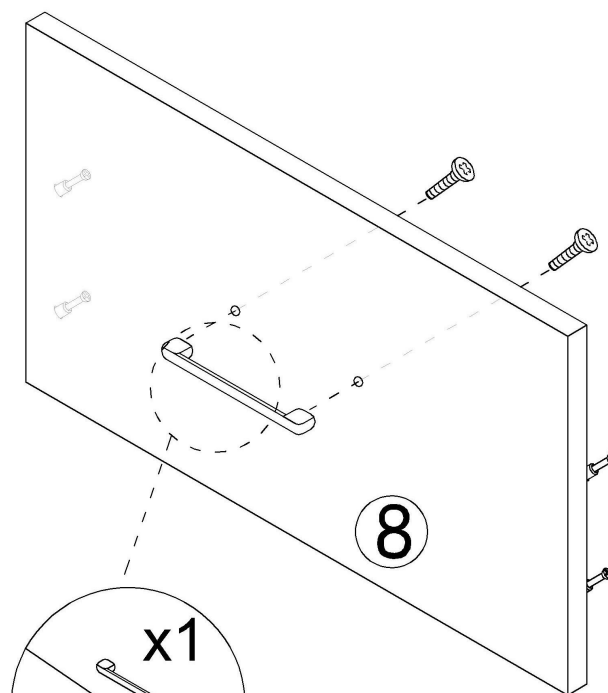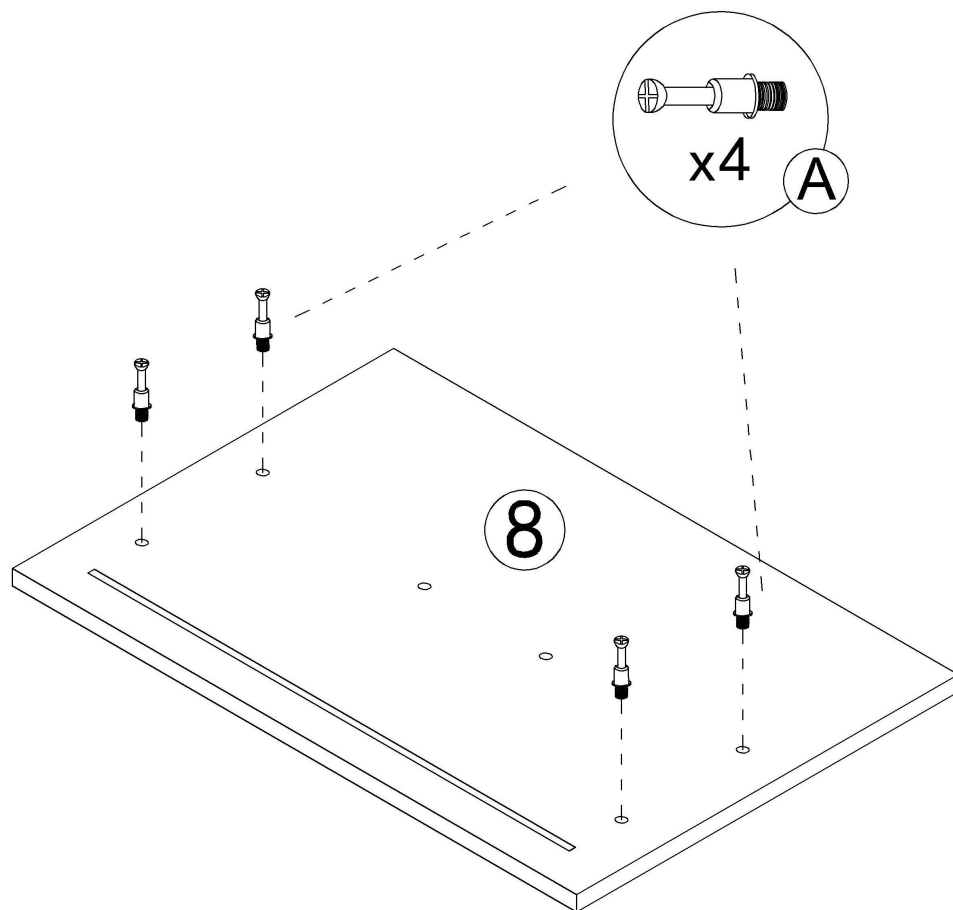



Step 10

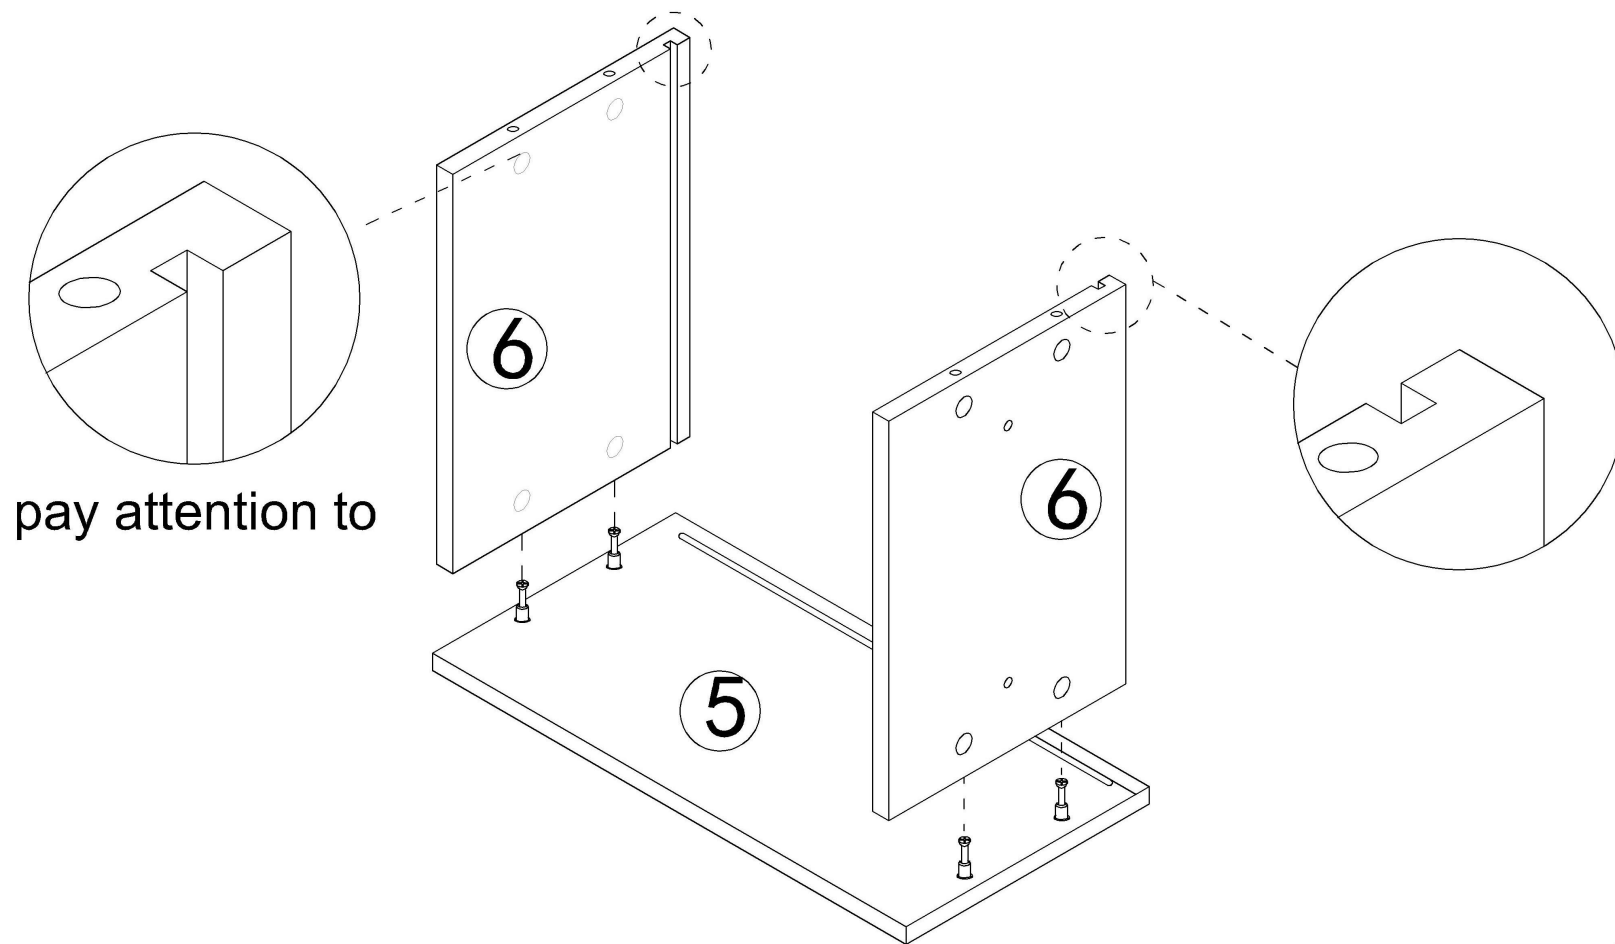

Step 11




pay attention to

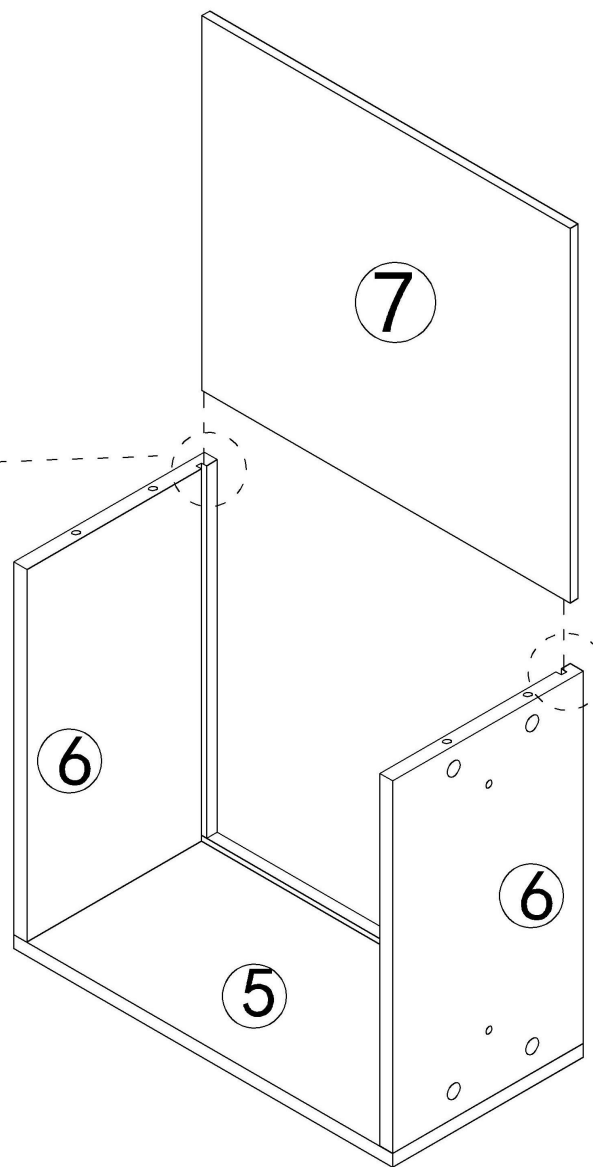




⑦ x1

Step 12





B  x8

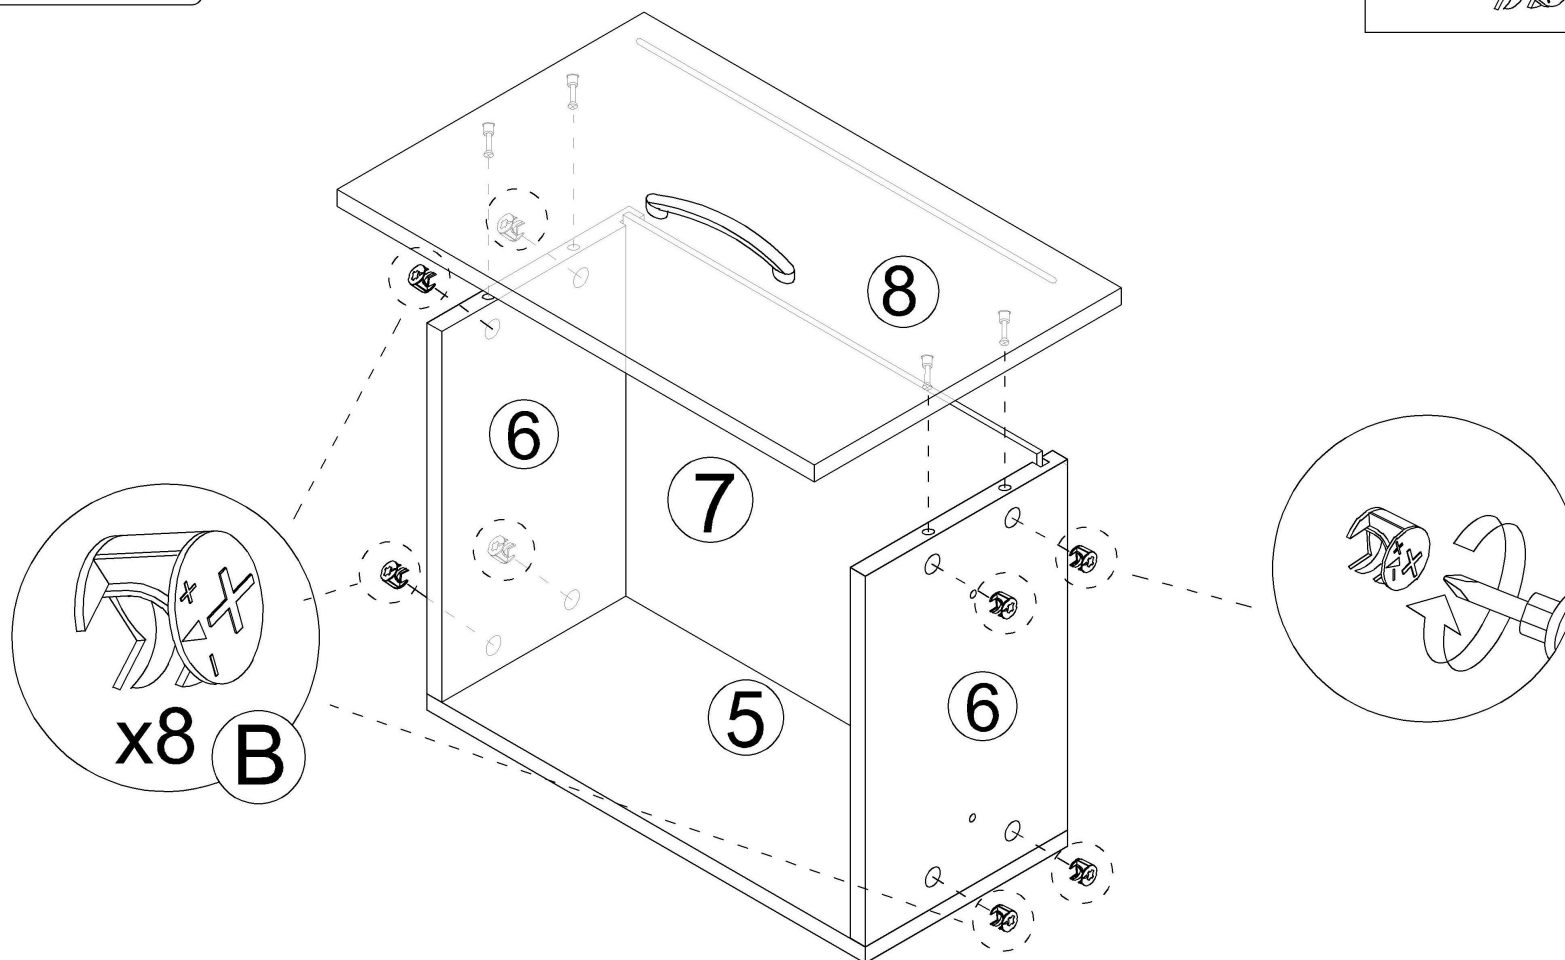




Step 13

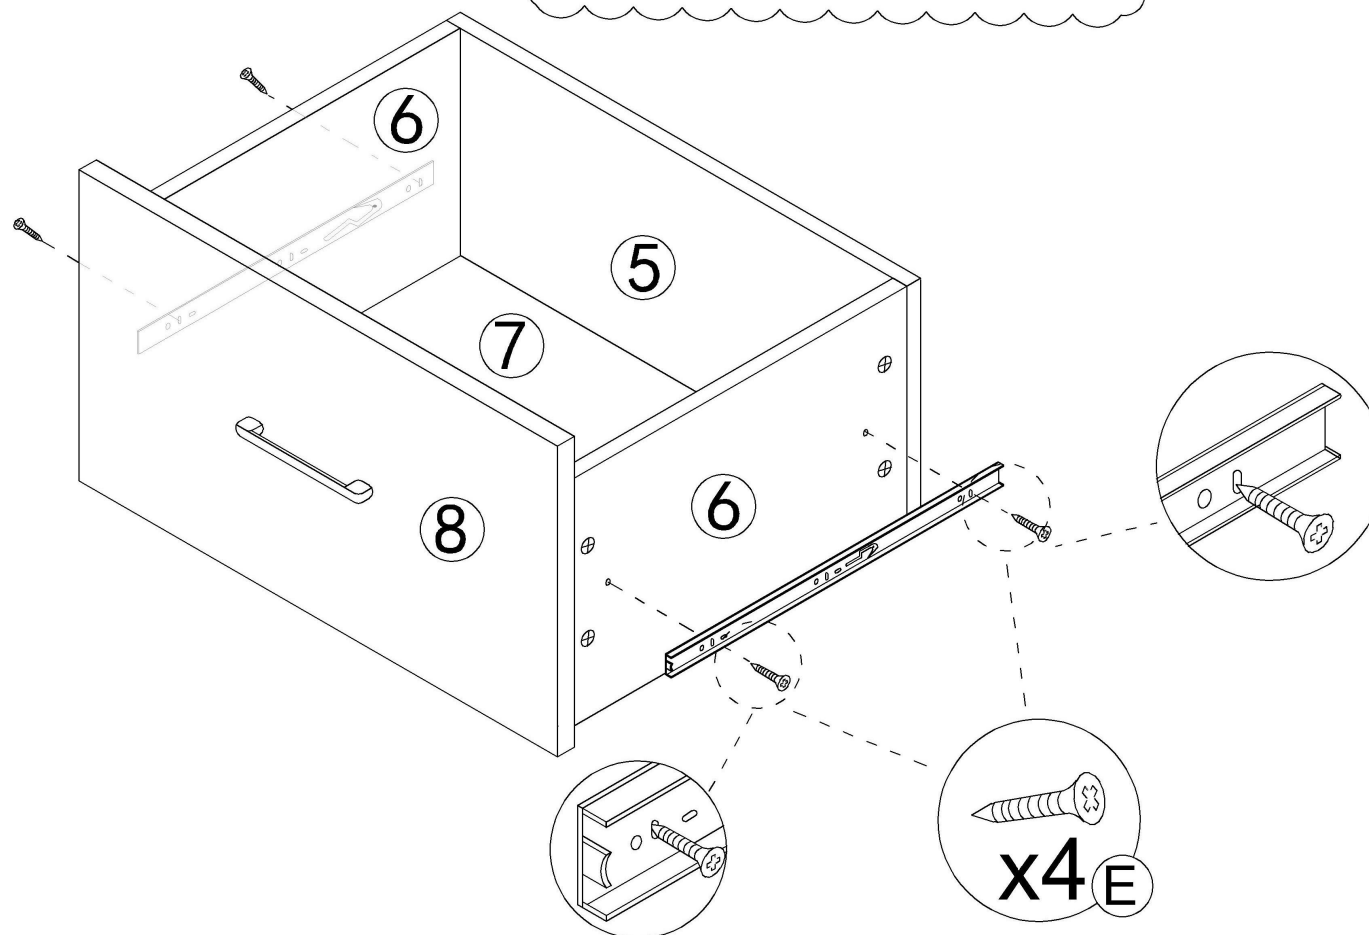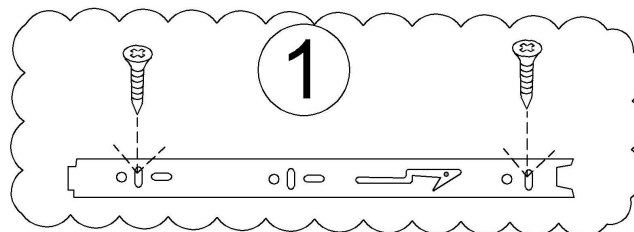

Step 14

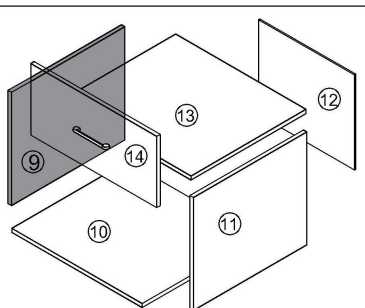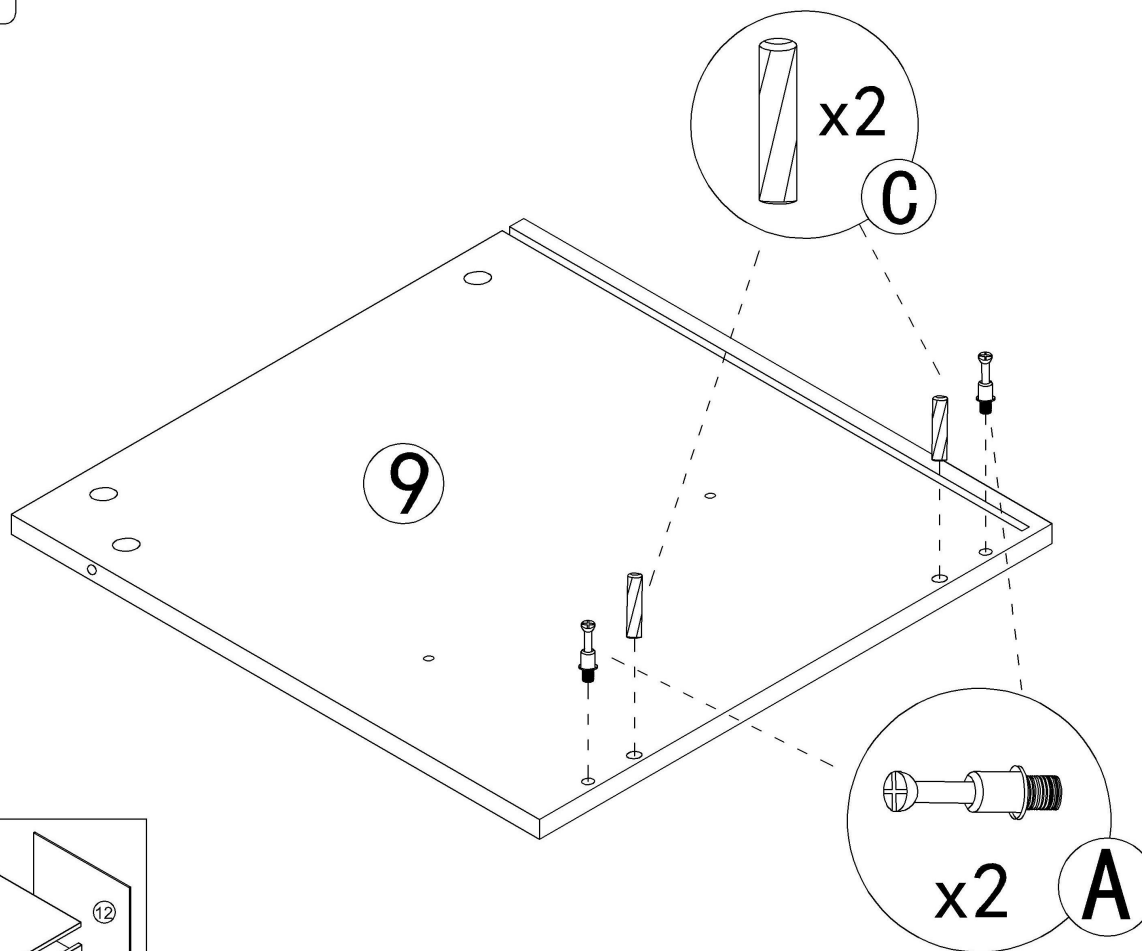

Step 15

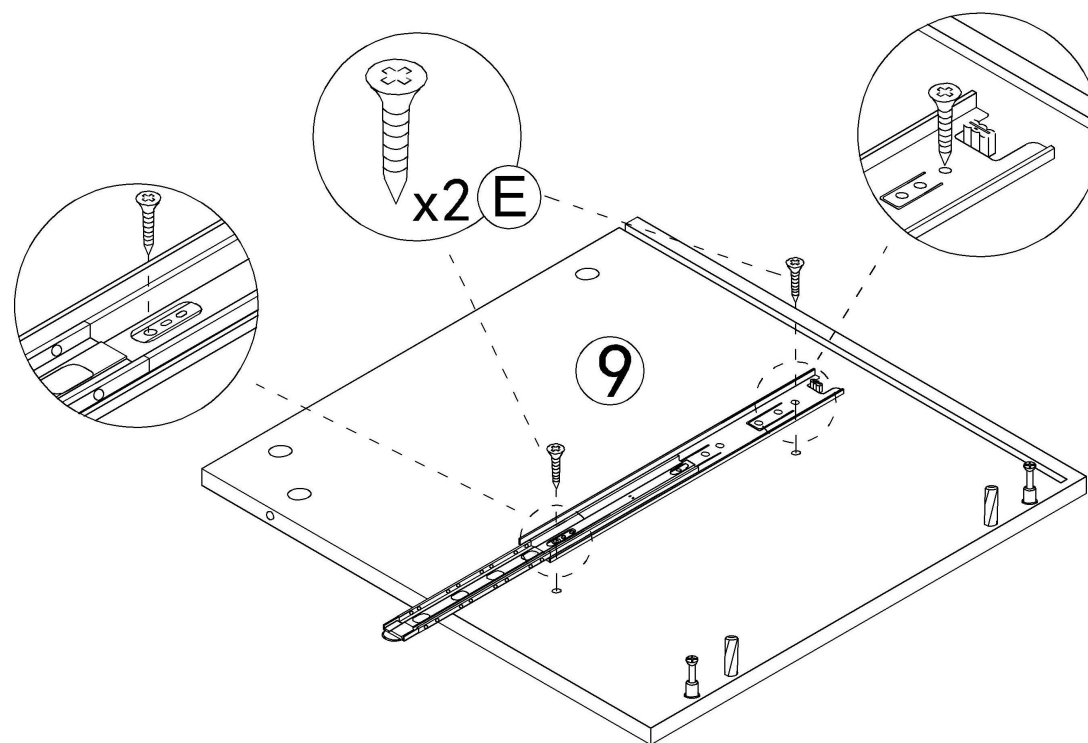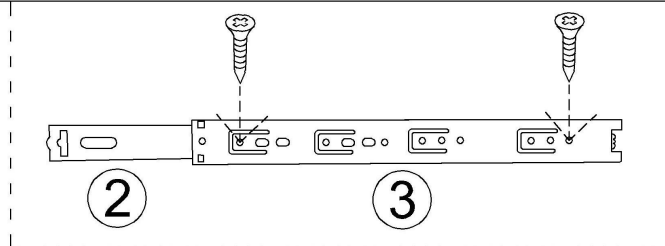


Step 16

Ⓔ







x1





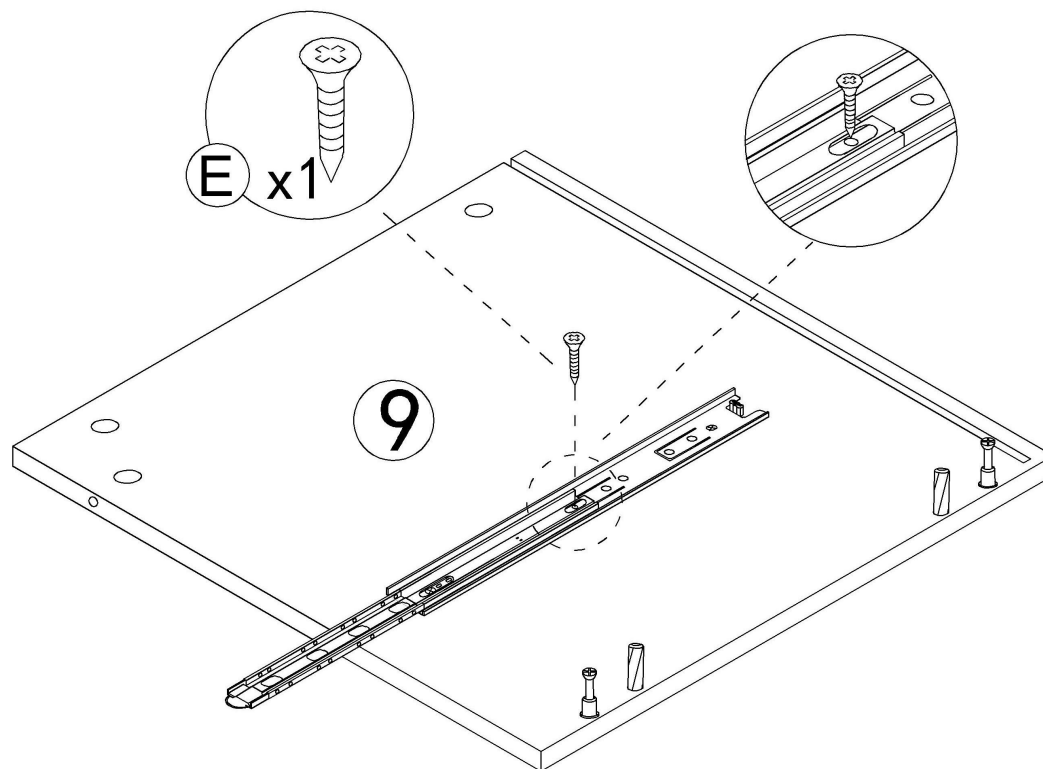


This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 17

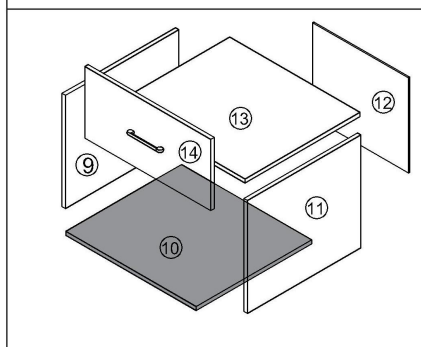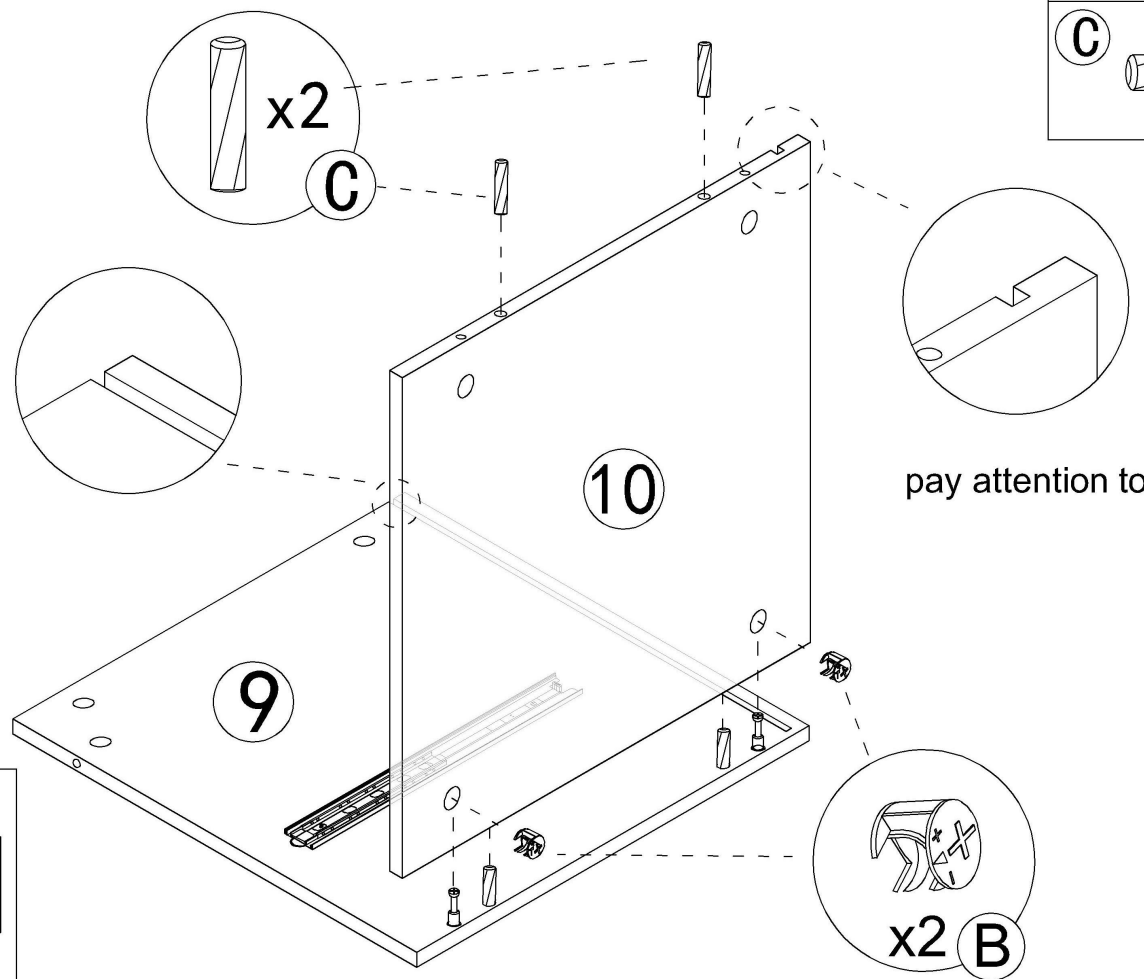

Step 18

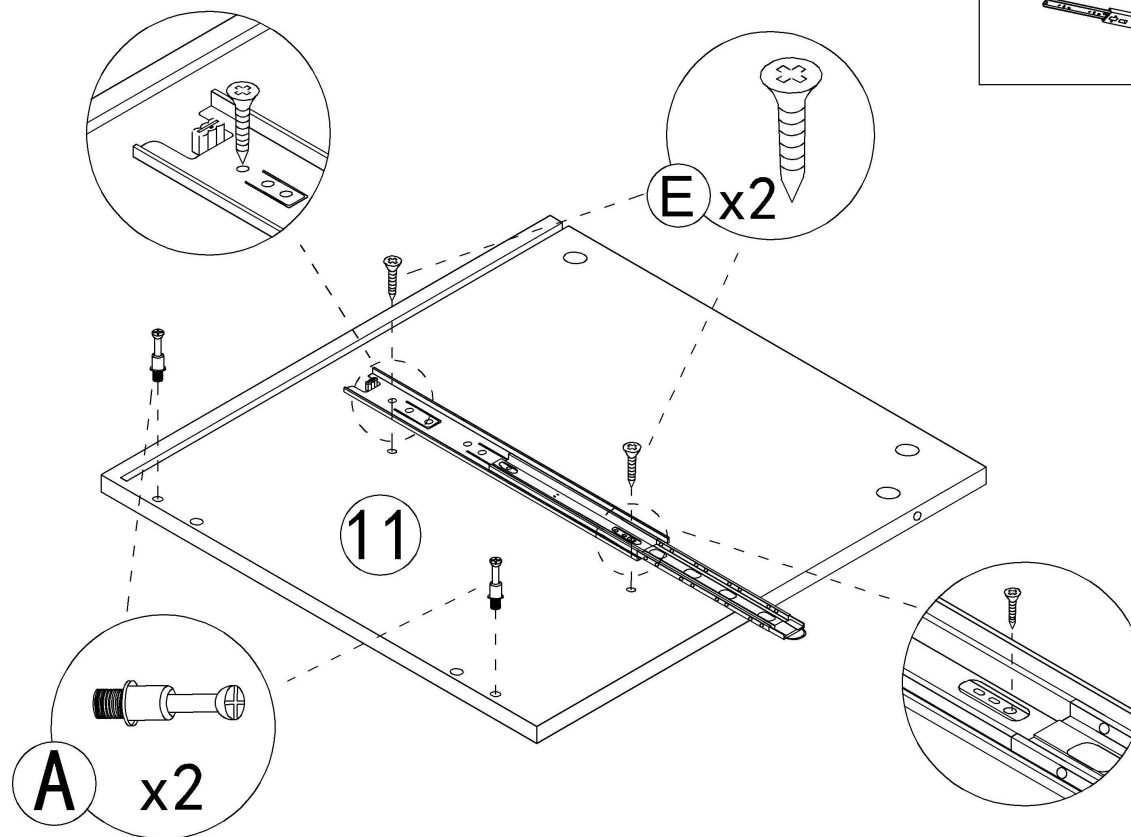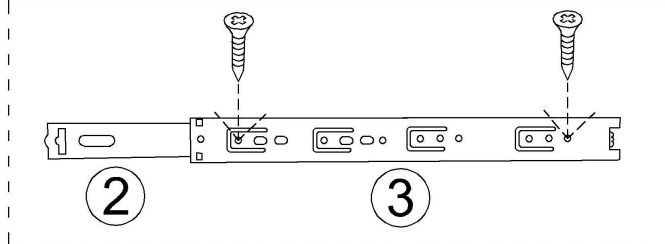


Step 19

E



x1

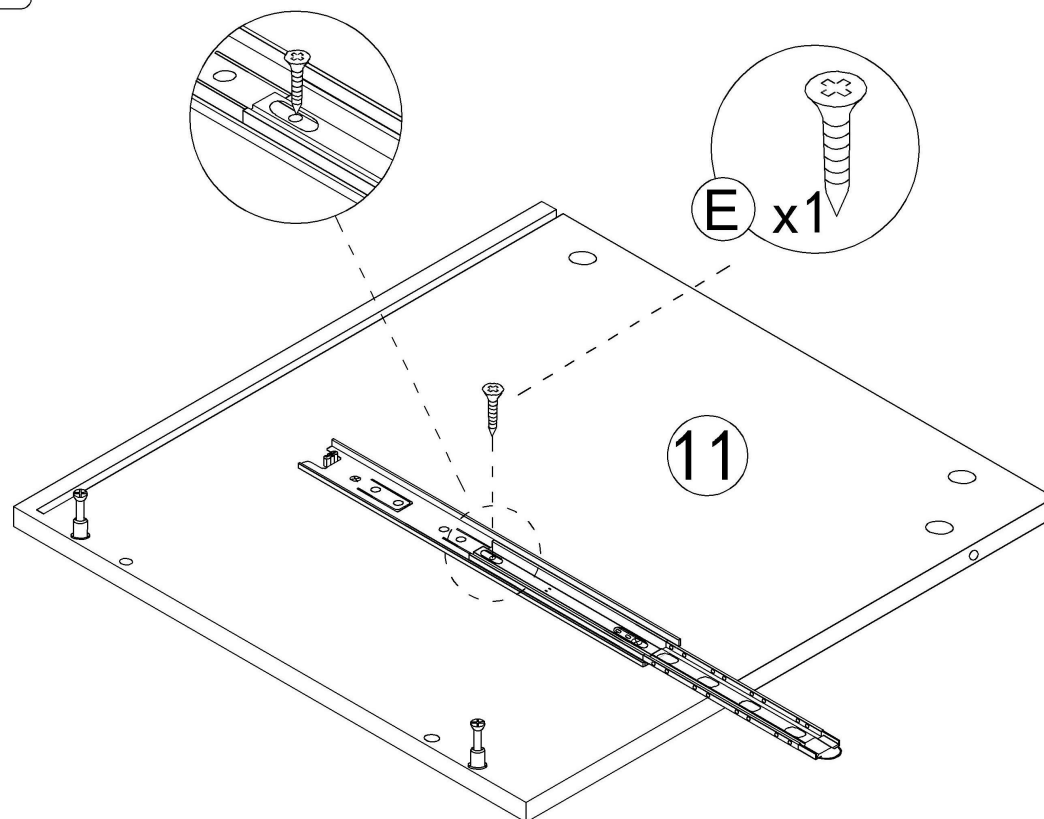



This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 20

B




x2

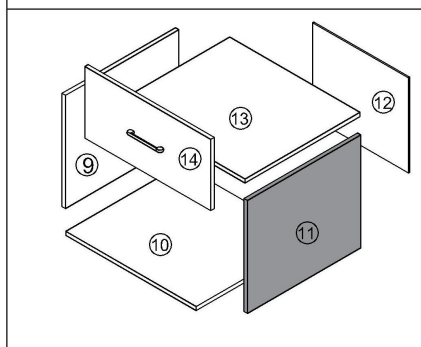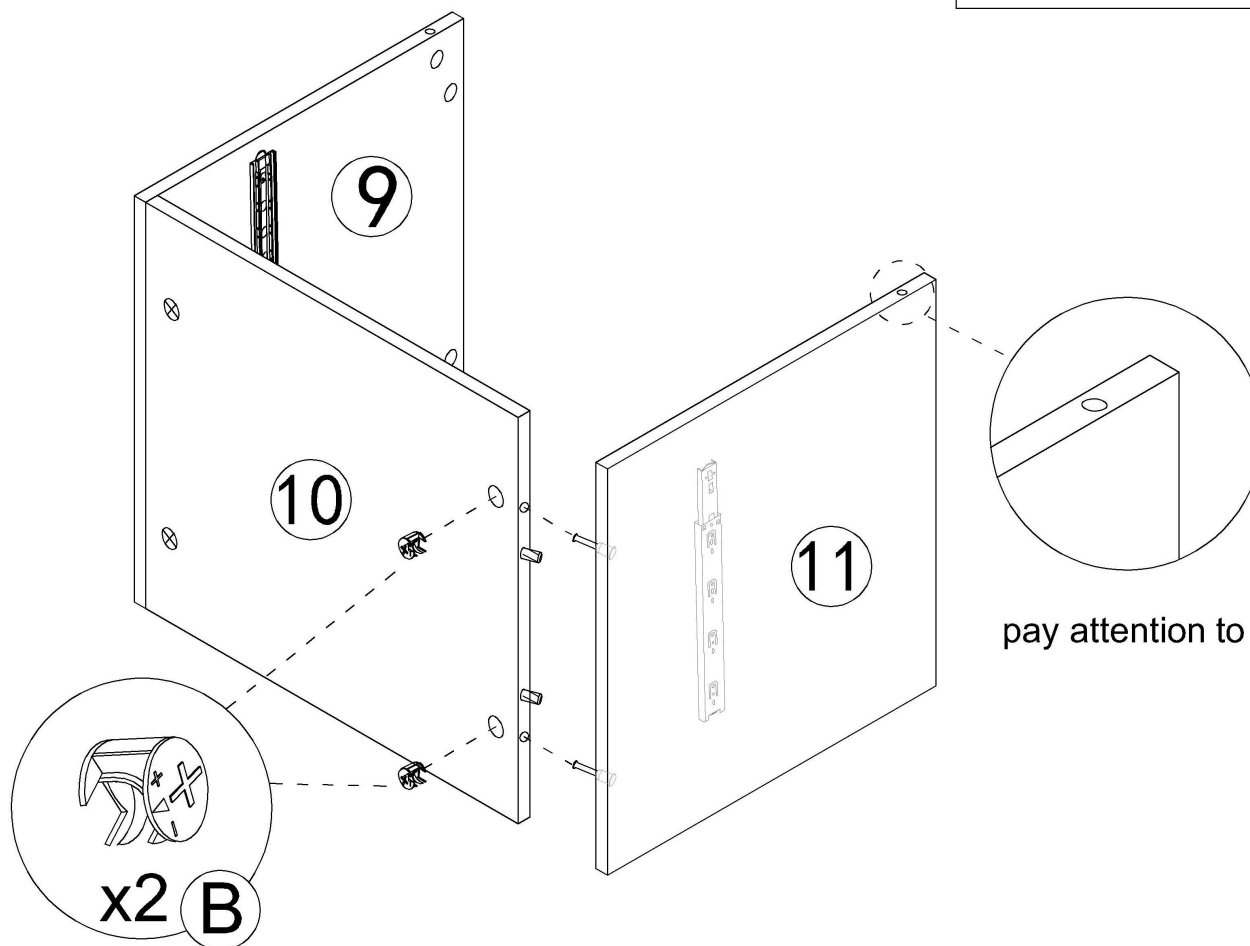

23


Step 21

J



x4



Tear off release paper and stick the black foot pad on the board

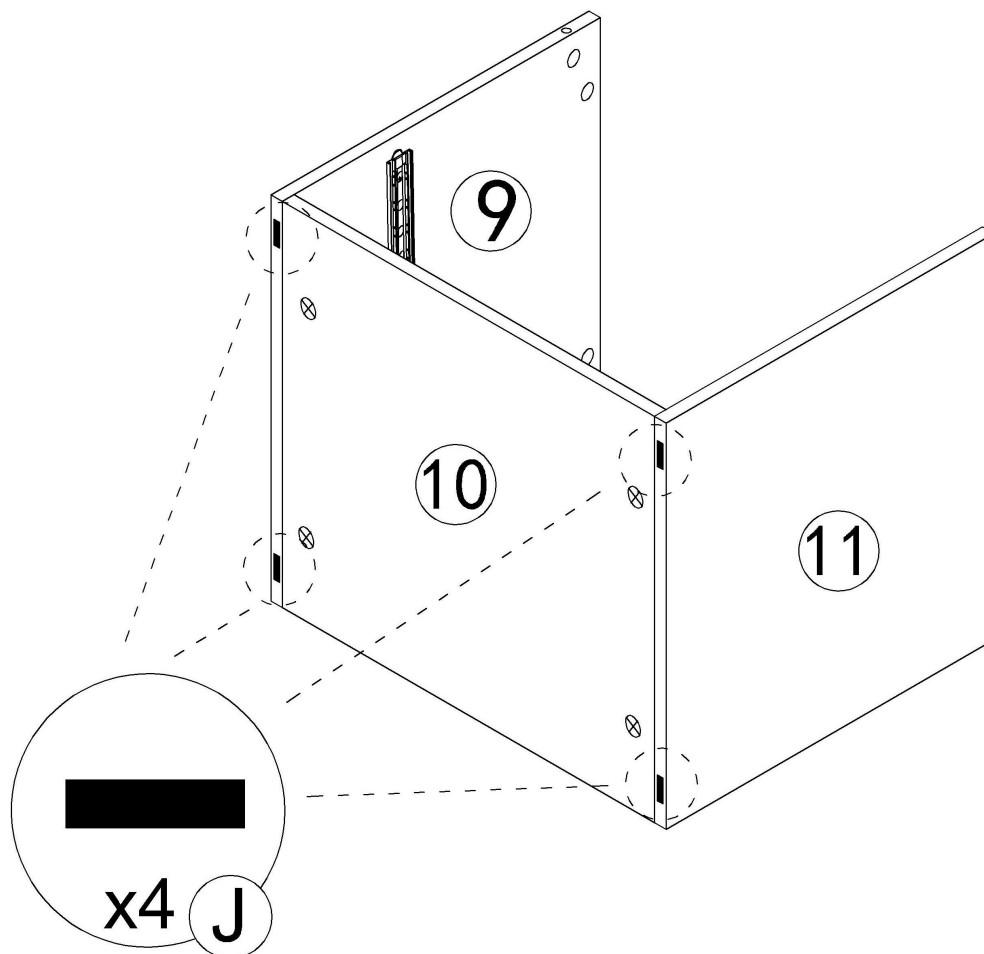

x4

J

Step 22

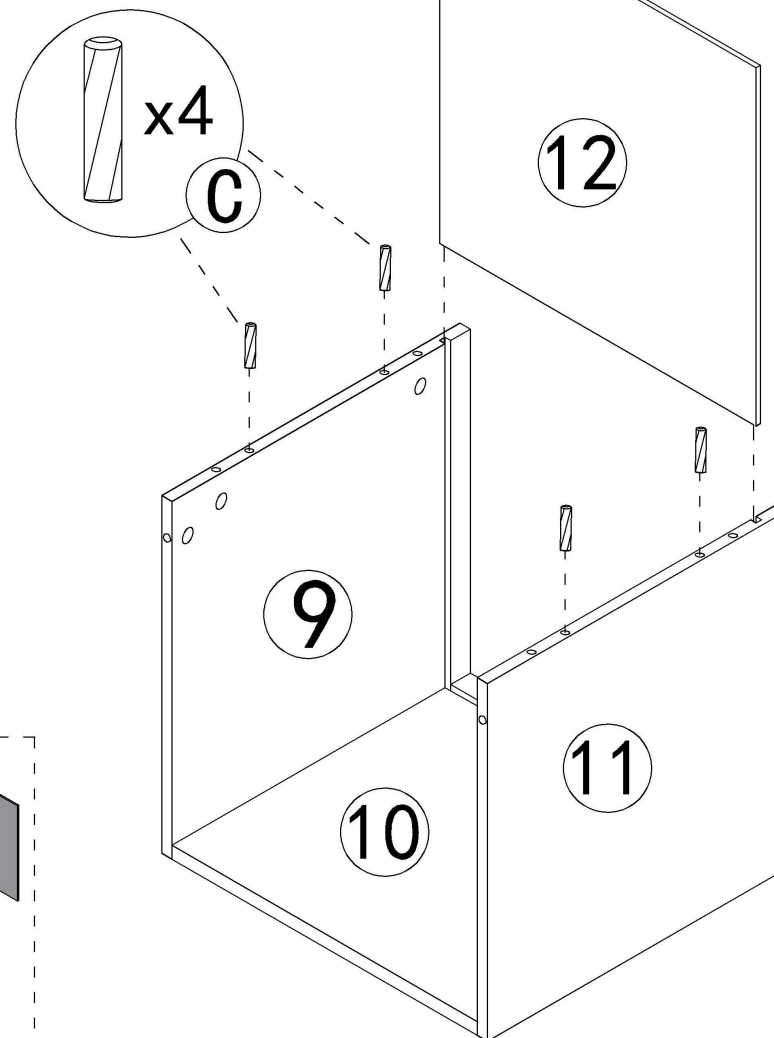


12 X1

C





x4

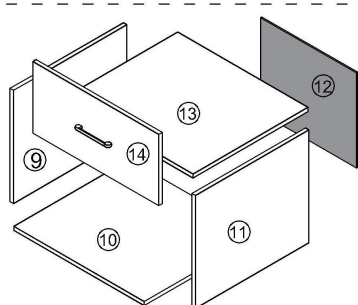

25

Step 23

A



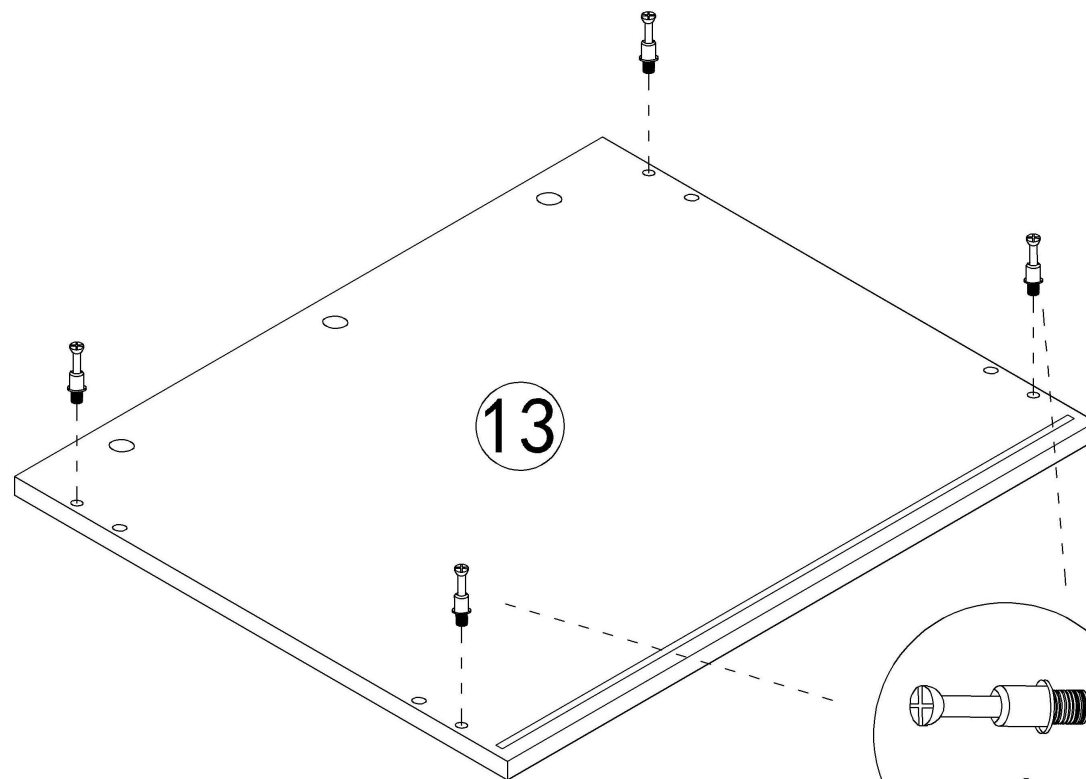


Step 24

B




x4

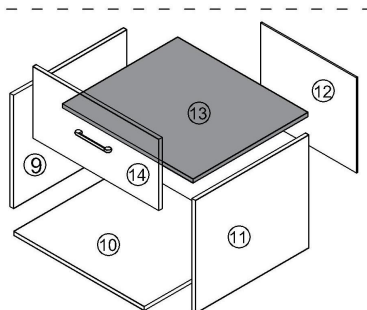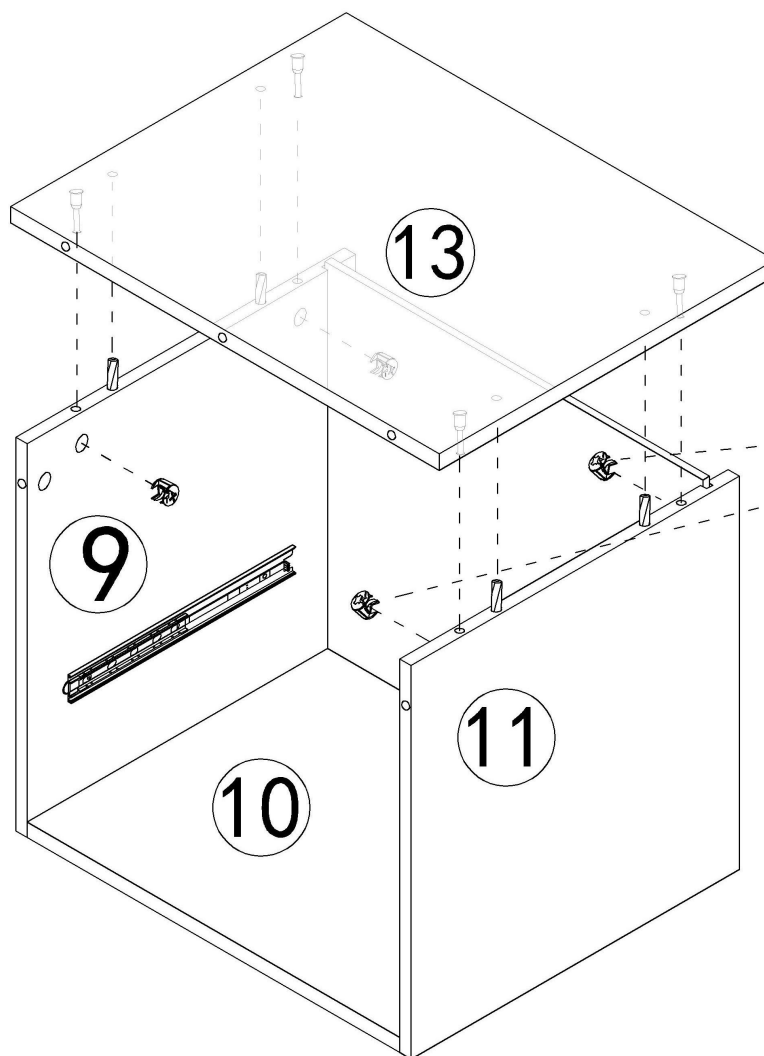

27

Step 25

A


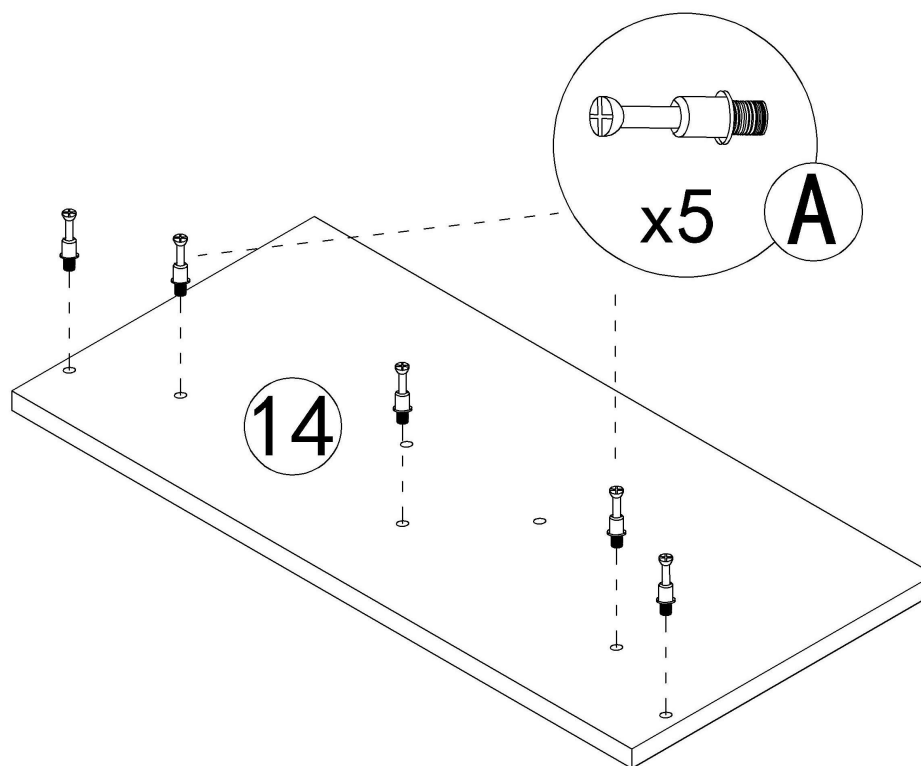


Step 26



B




x5

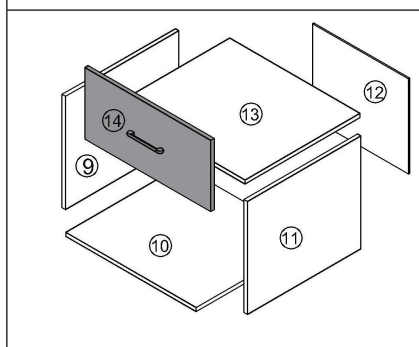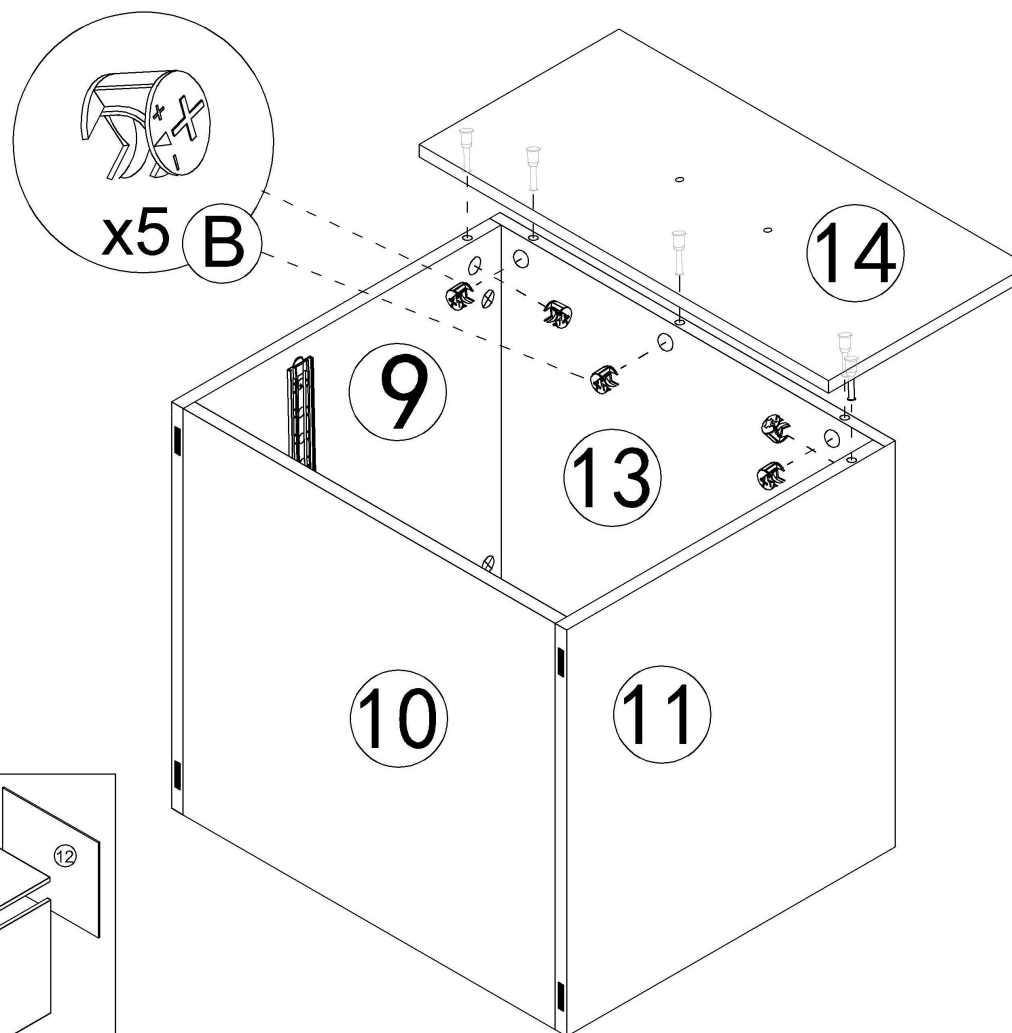

Step 27

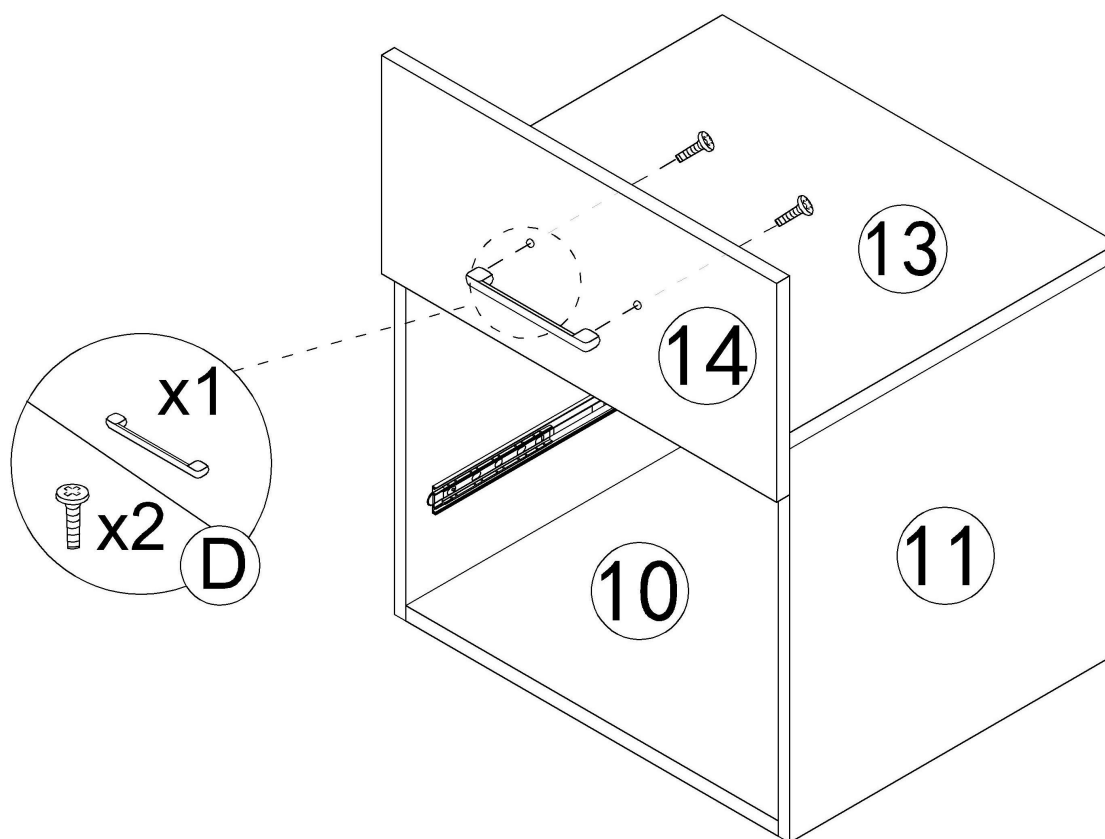


Step 28

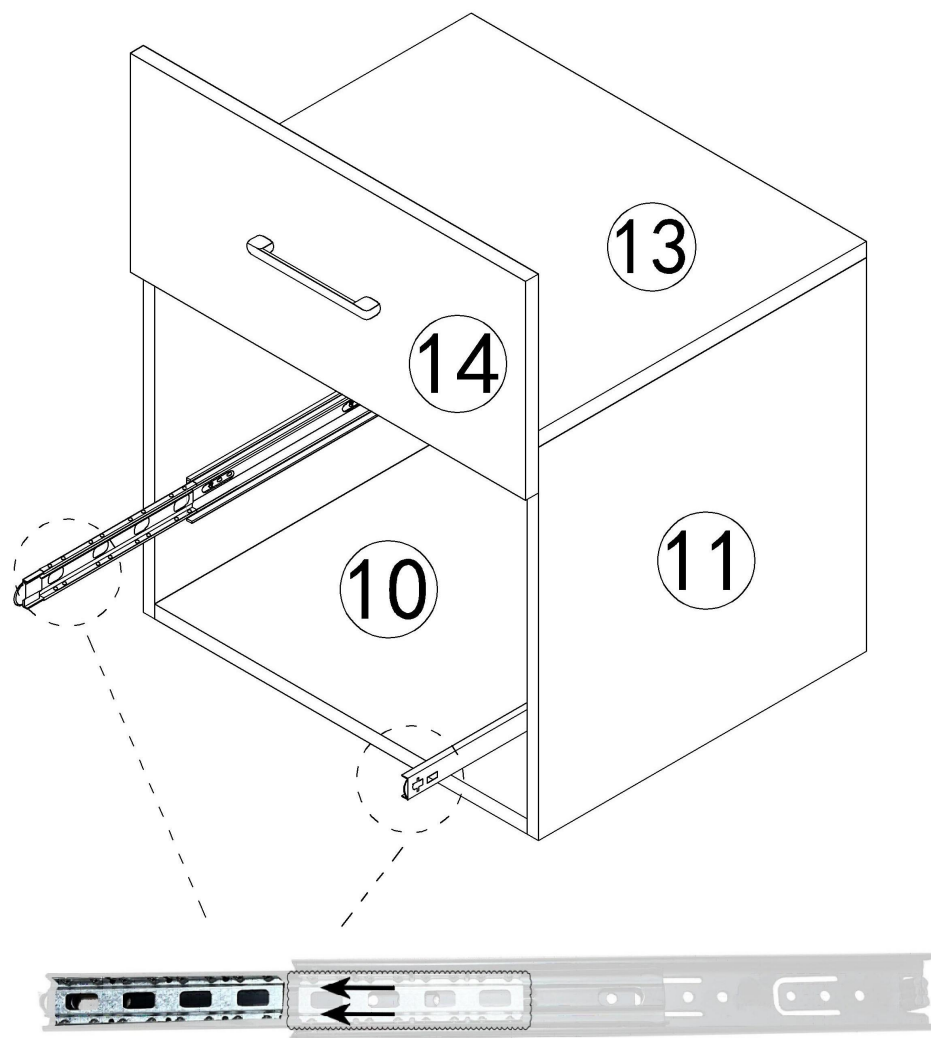


As shown, When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.

Step 29


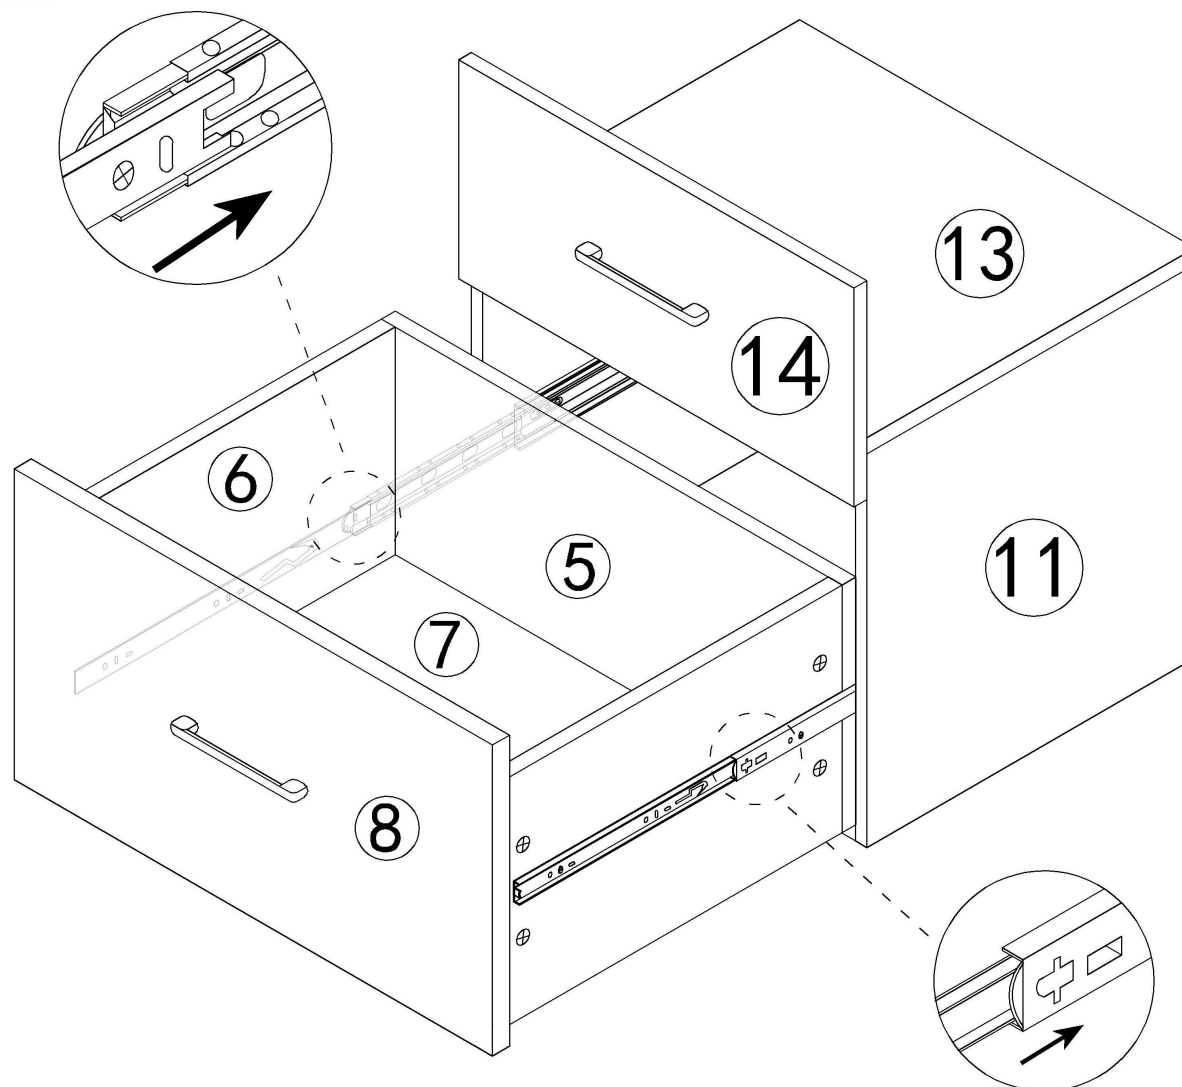


Step 30

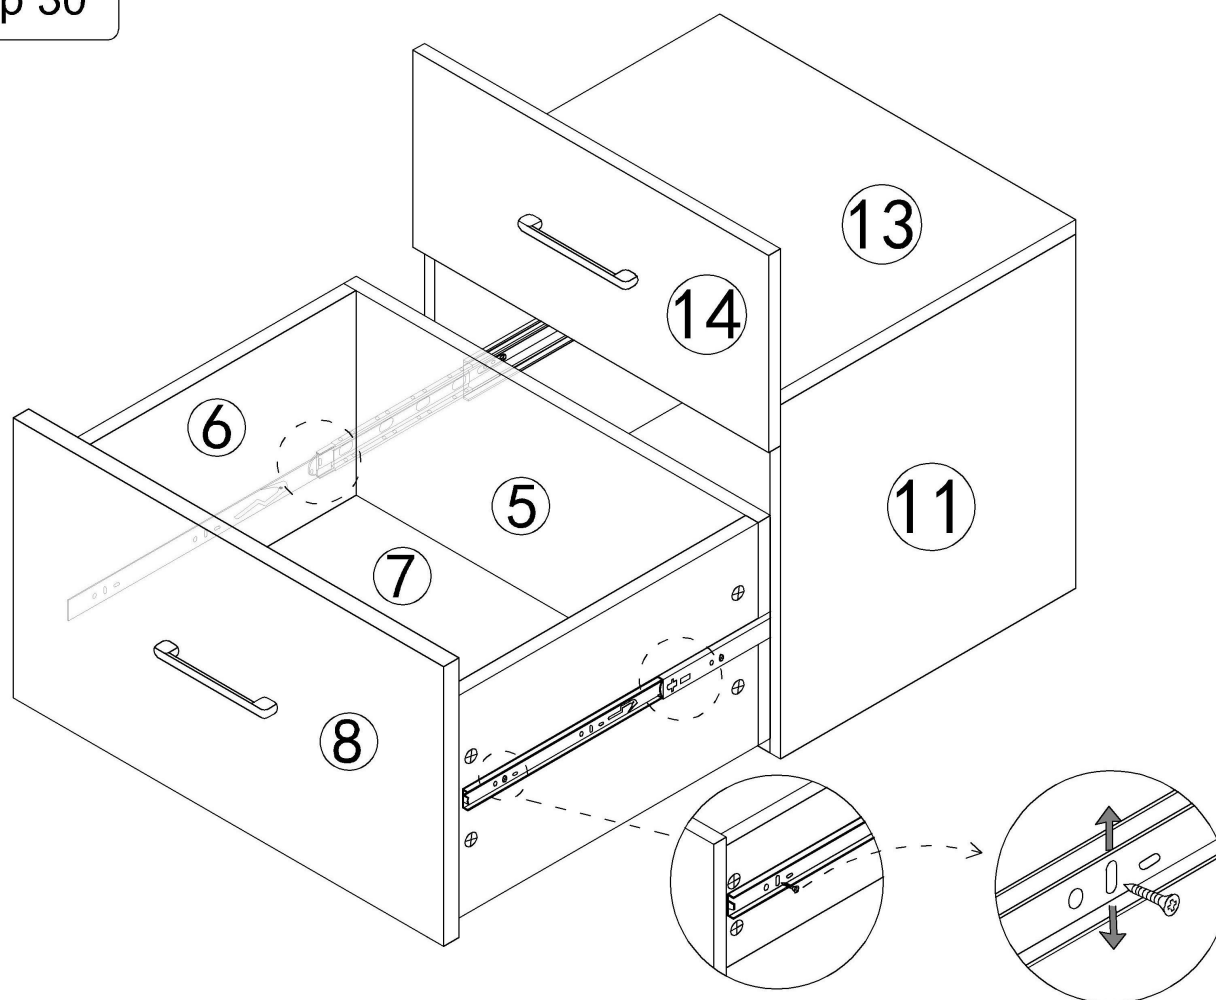


If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap

Step 31

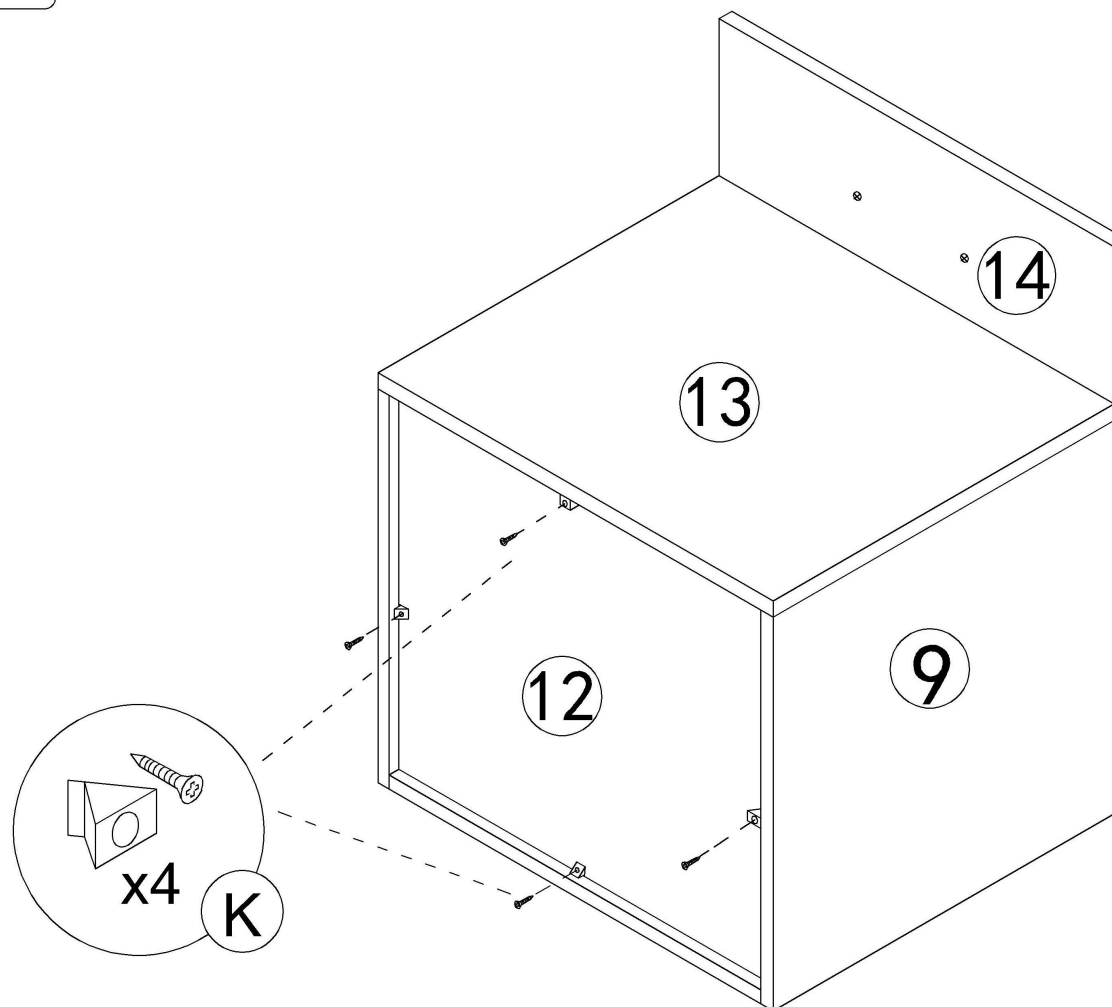


Step 32

N



x2



Apply double-sided tape under the seat cushion to prevent it from moving

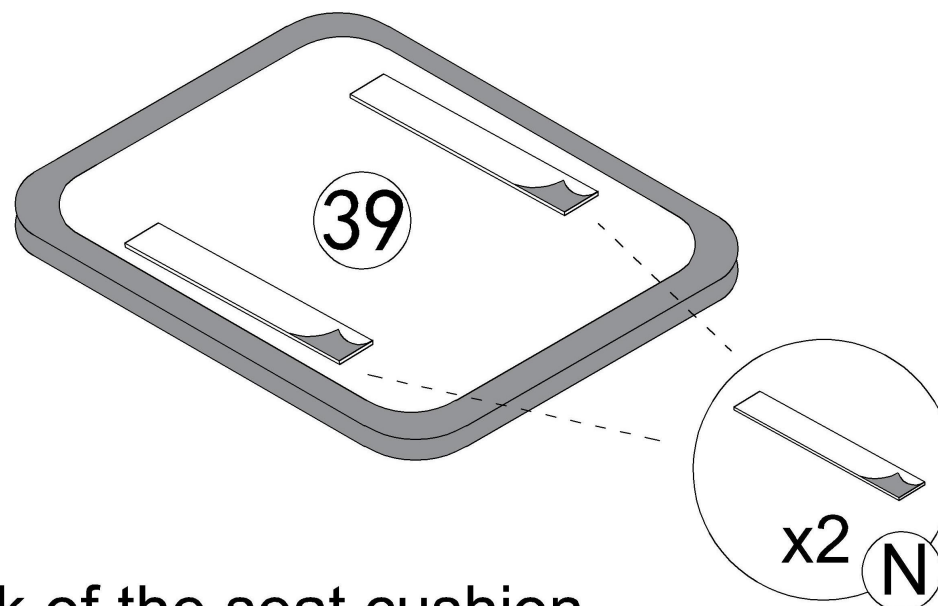

The back of the seat cushion



35



Step 33

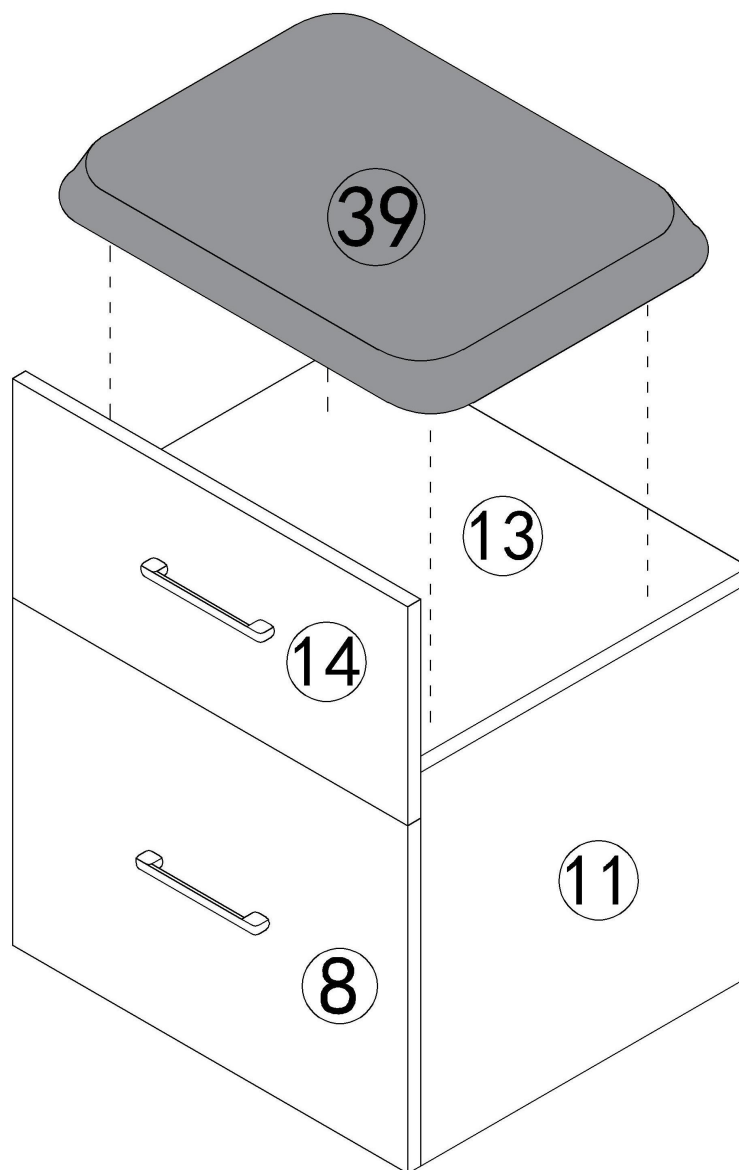

39 x1

36


A		30pcs
B		20pcs
C		8pcs
E		6pcs 2pcs
J		5pcs

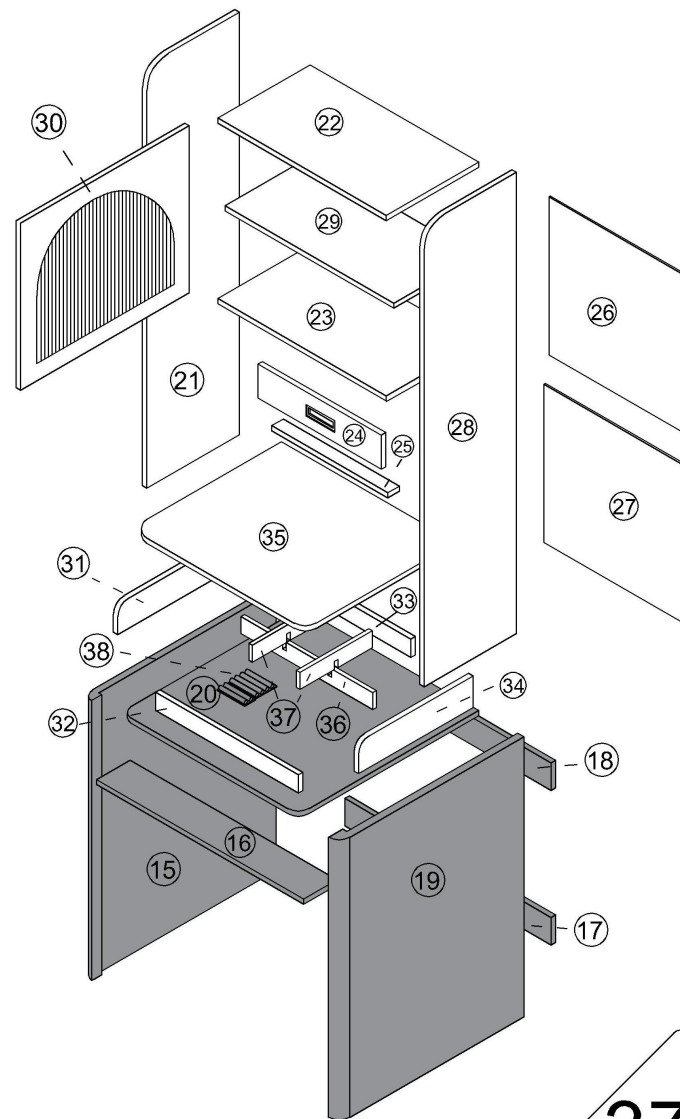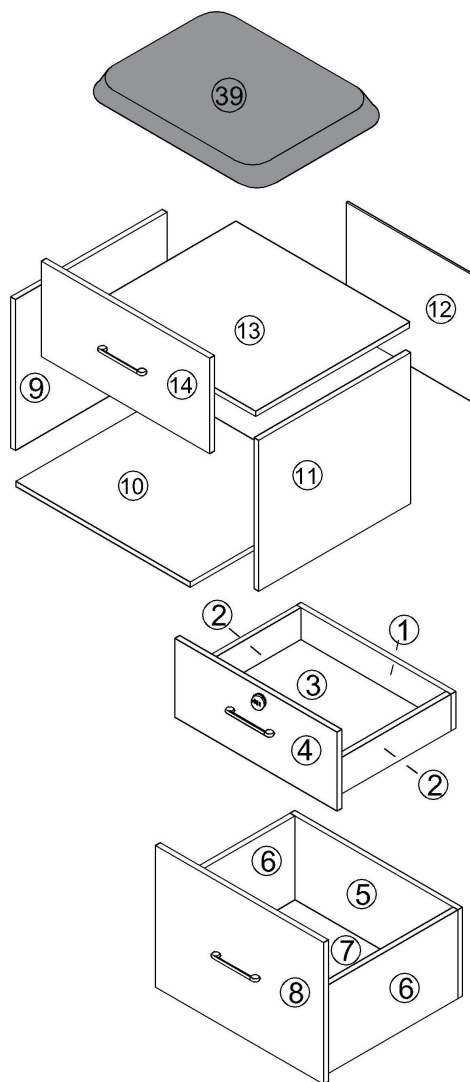




37

Step 34

A

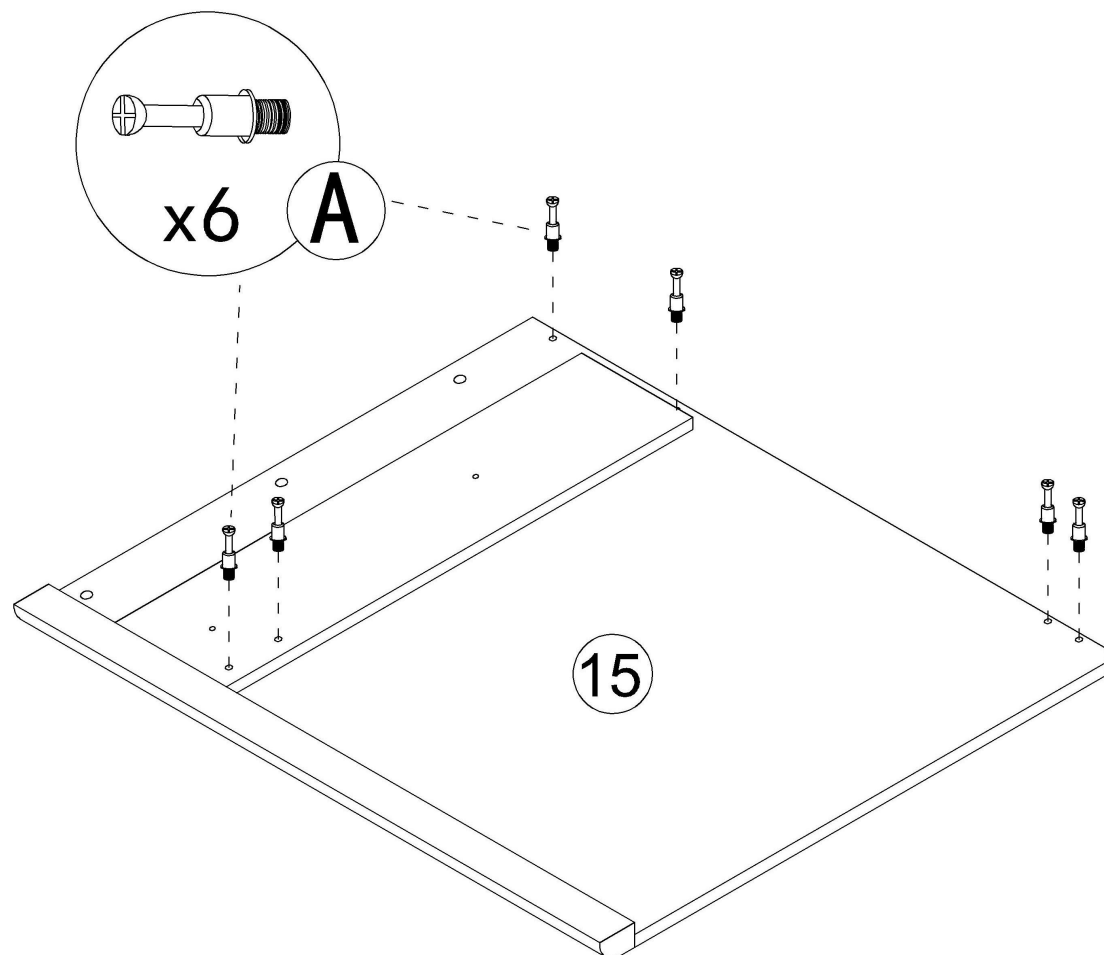

Step 35

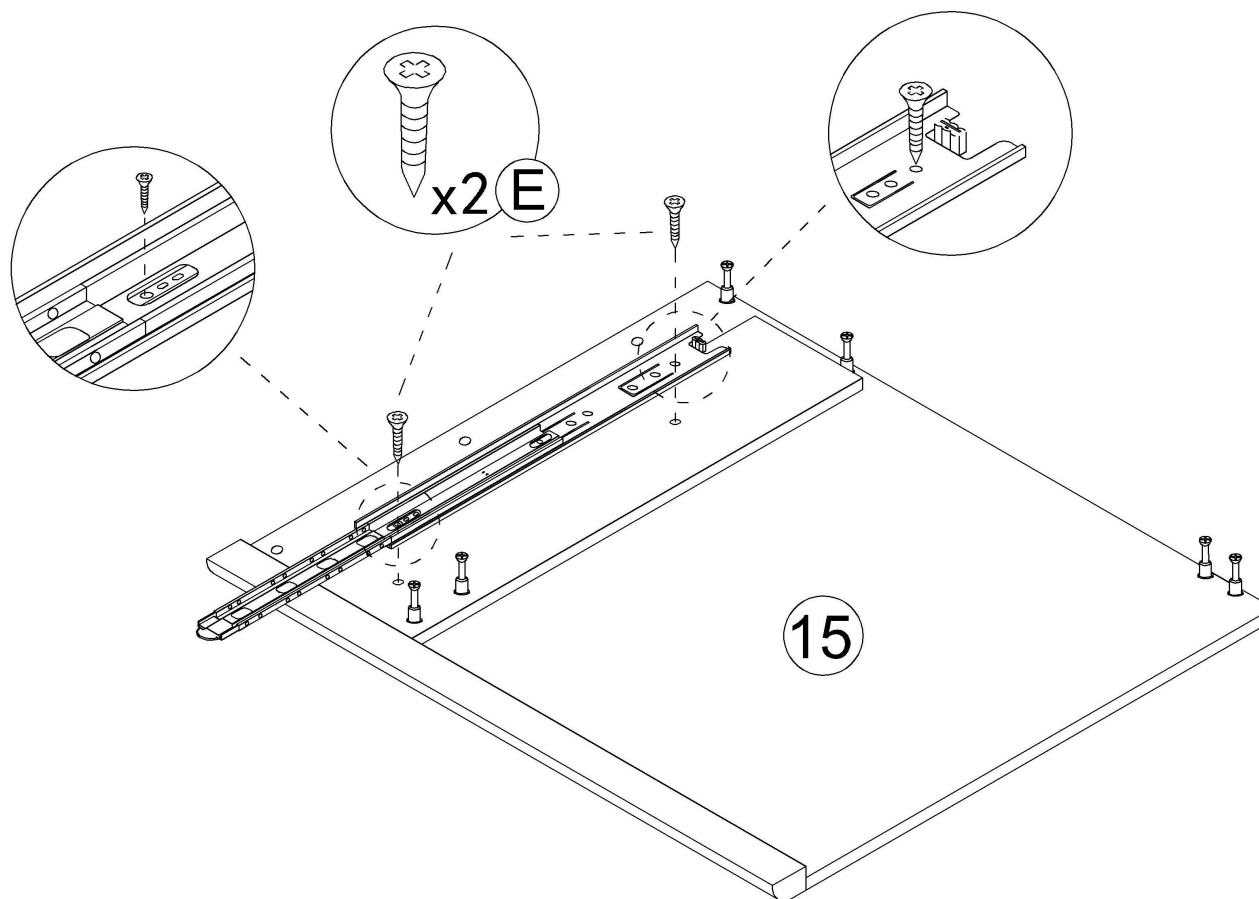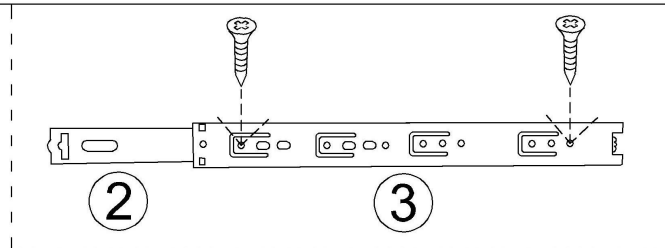


Step 36

E



x1

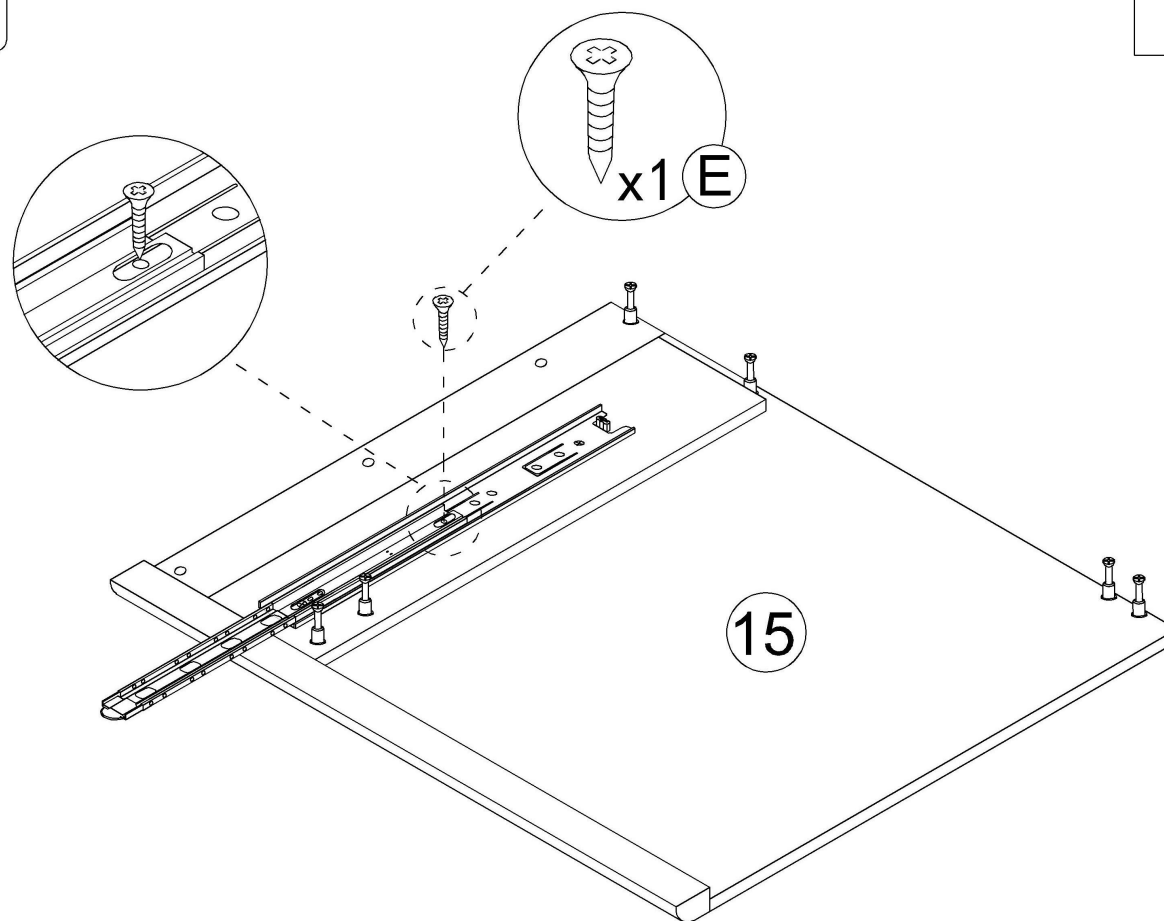

This hole is for strengthening fixed hole customers can choose to install according to their needs.


40

Step 37

B



x2

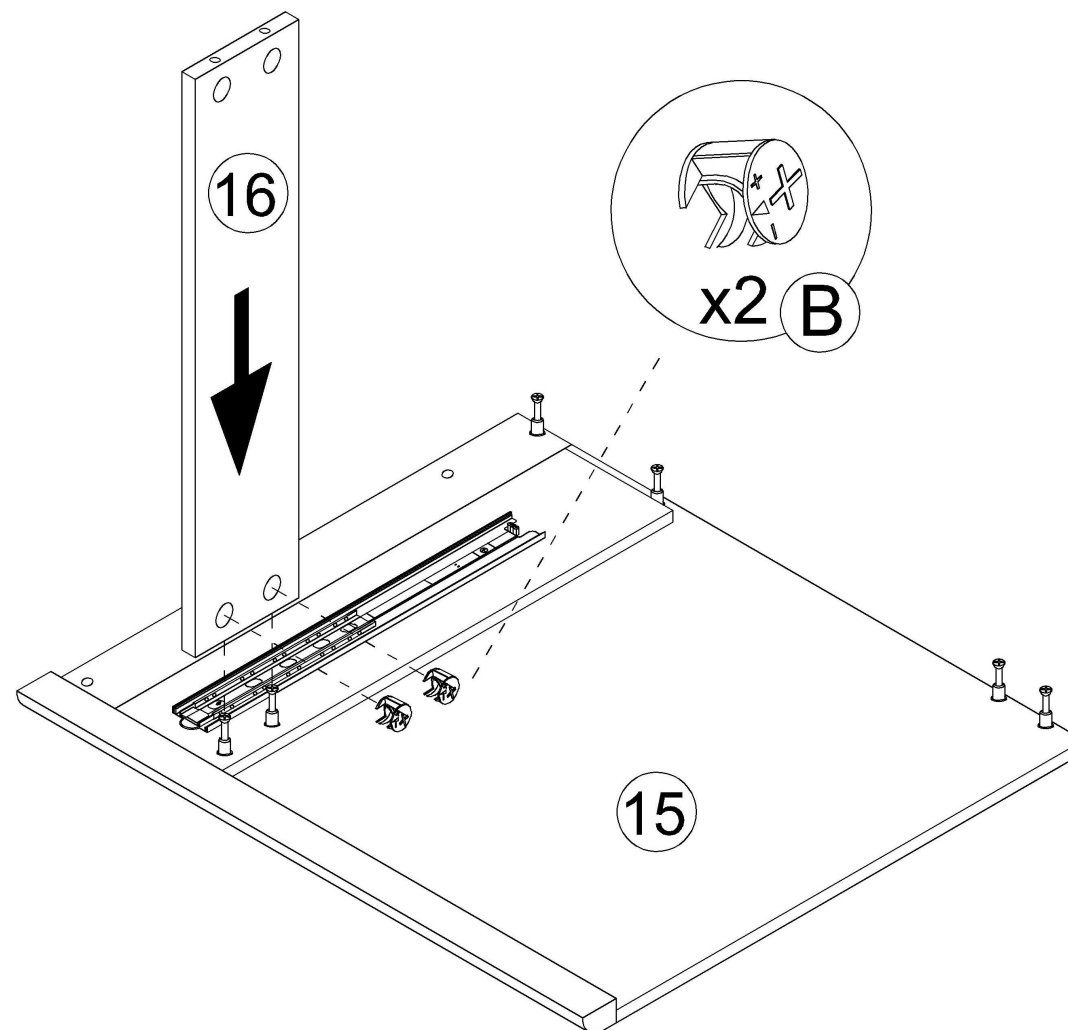


Step 38


B



x2

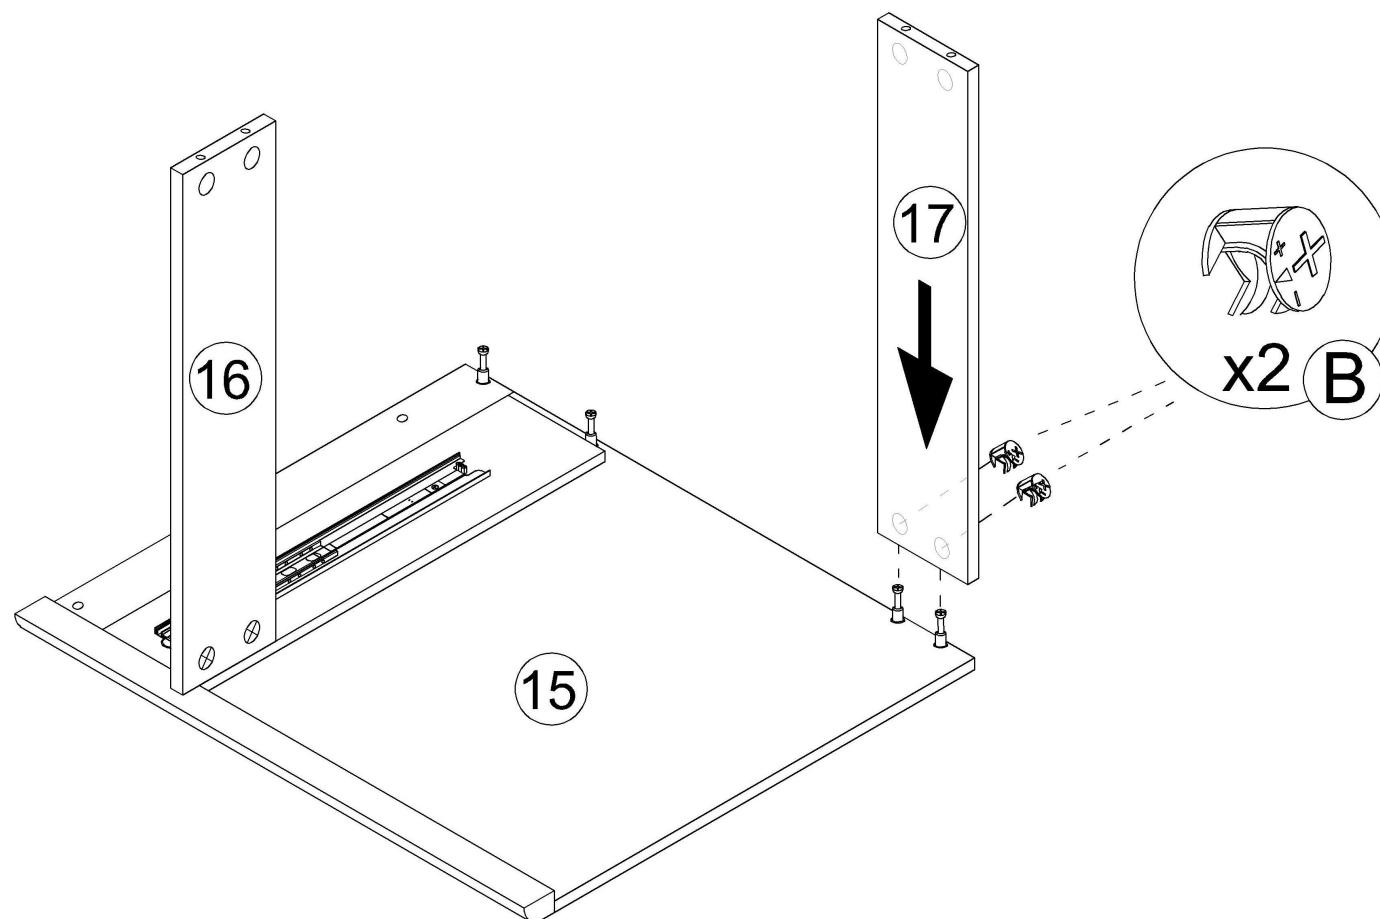

Step 39

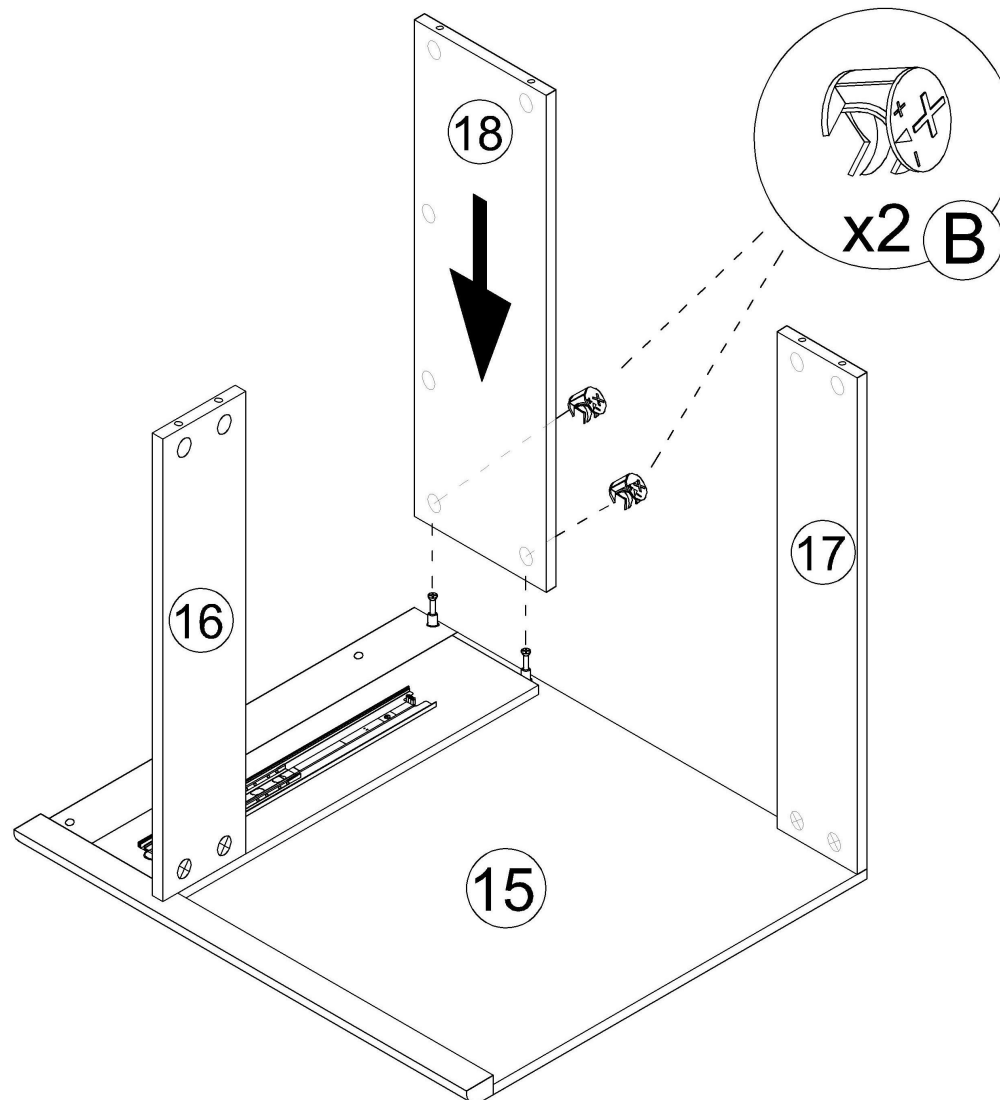

B




x2

Step 40




A



A x6

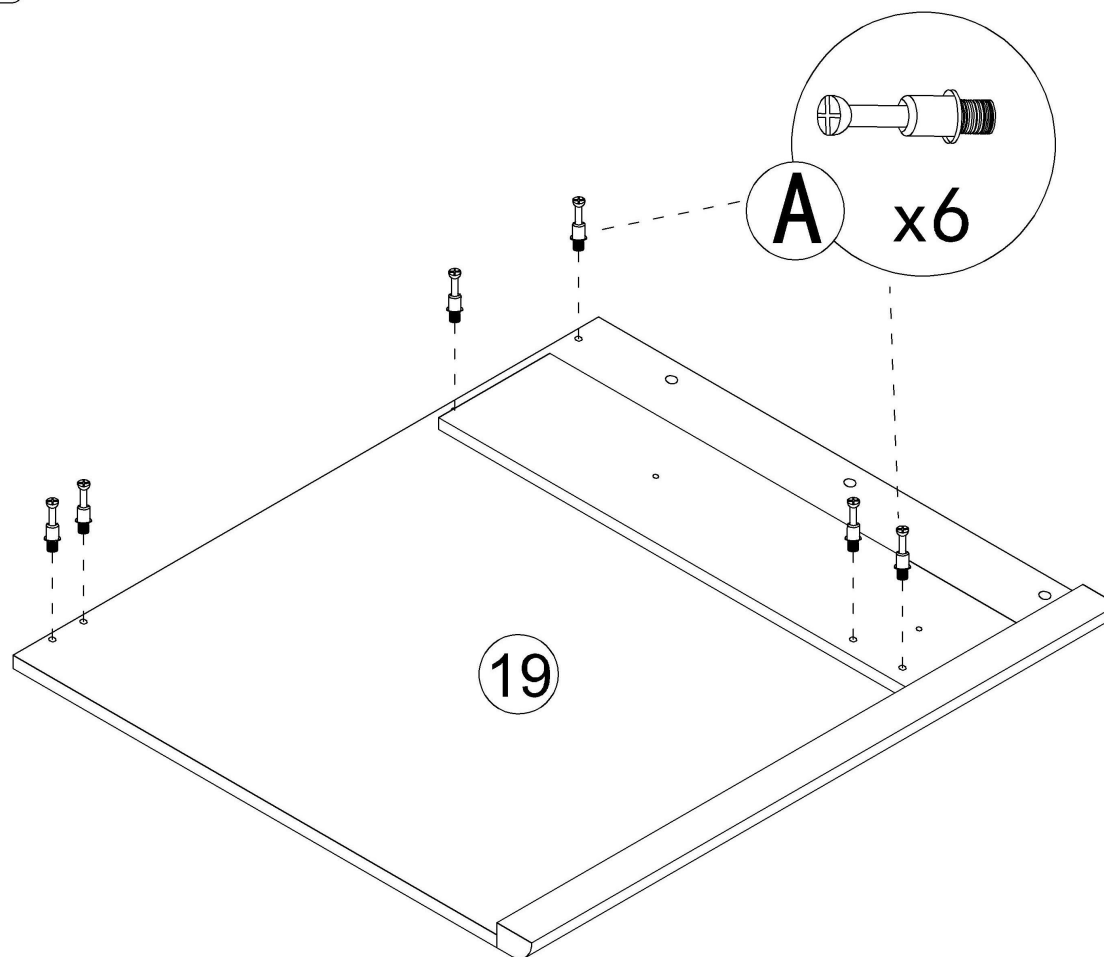

Step 41

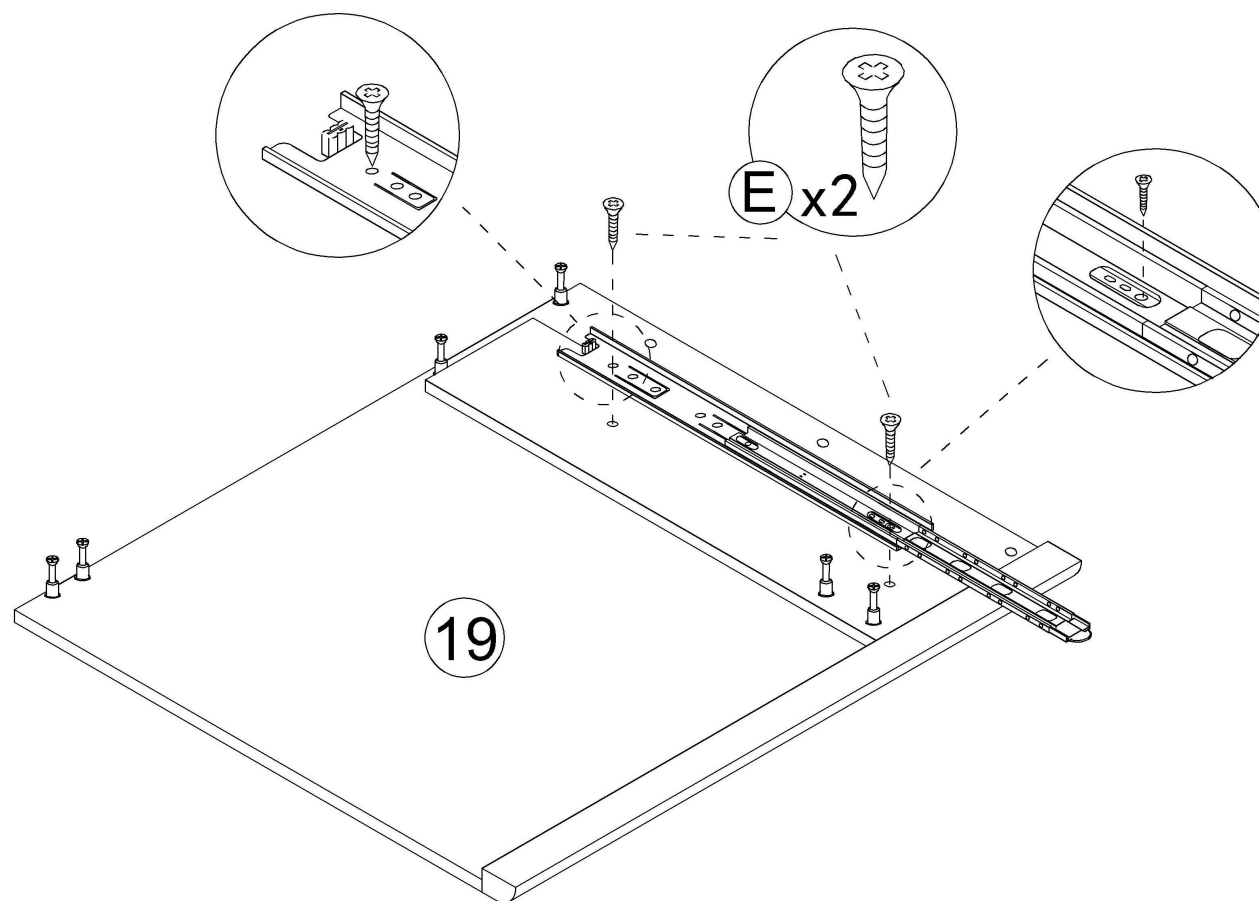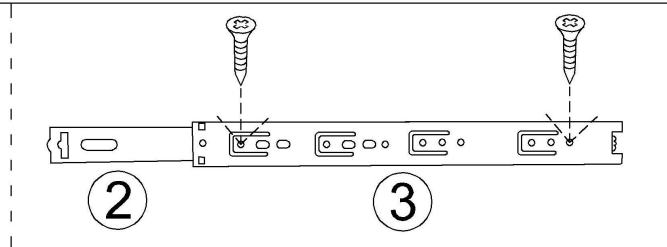


Step 42

E



x1

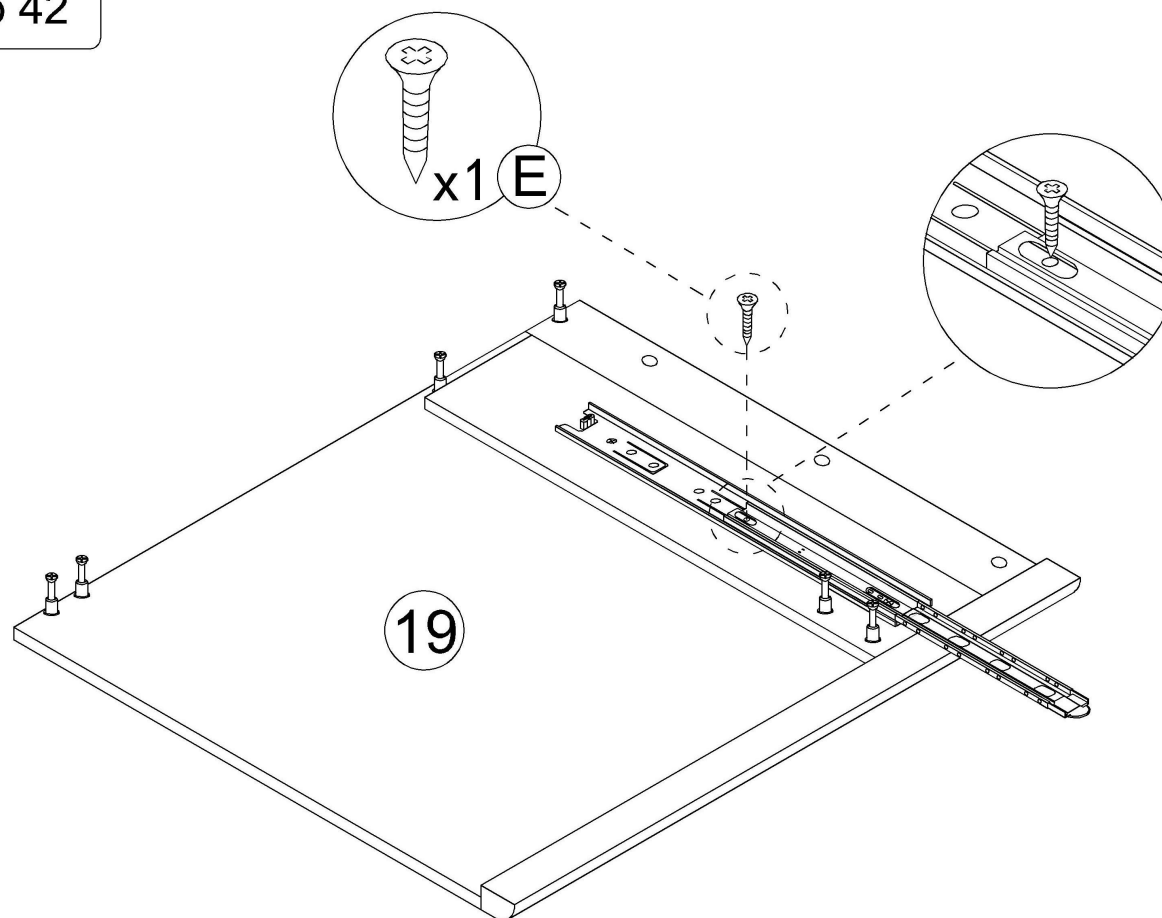


This hole is for strengthening fixed hole customers can choose to install according to their needs.

Step 43

B




x6

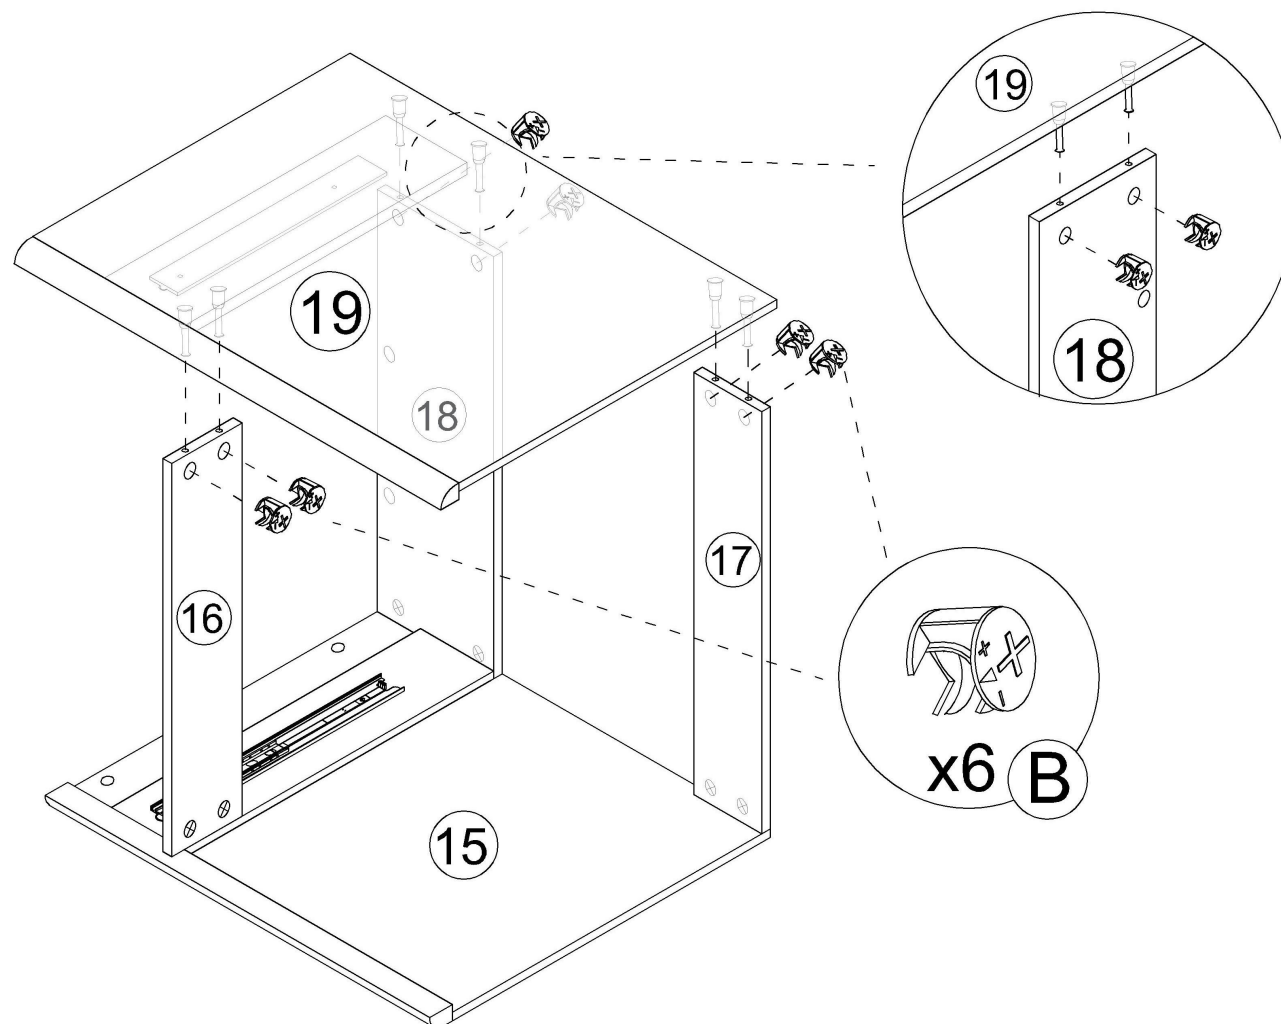



Step 44

J



x5

Tear off release paper and stick the black foot pad on the board

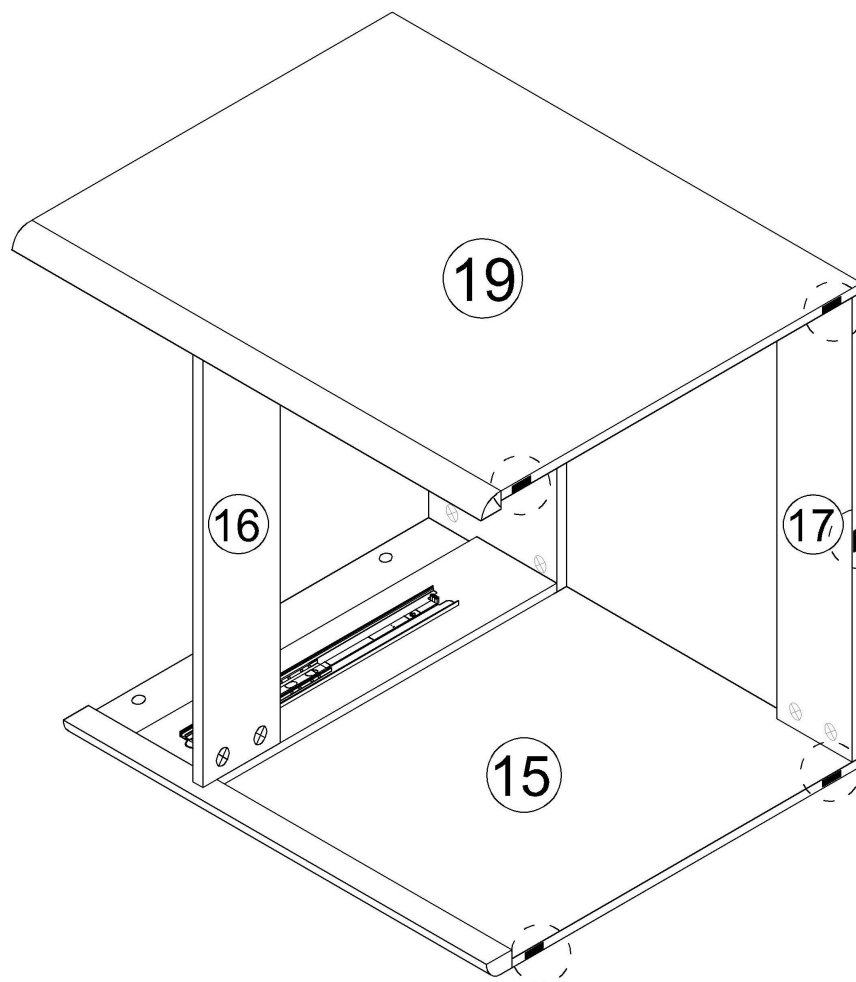


x5



J

Step 45

A

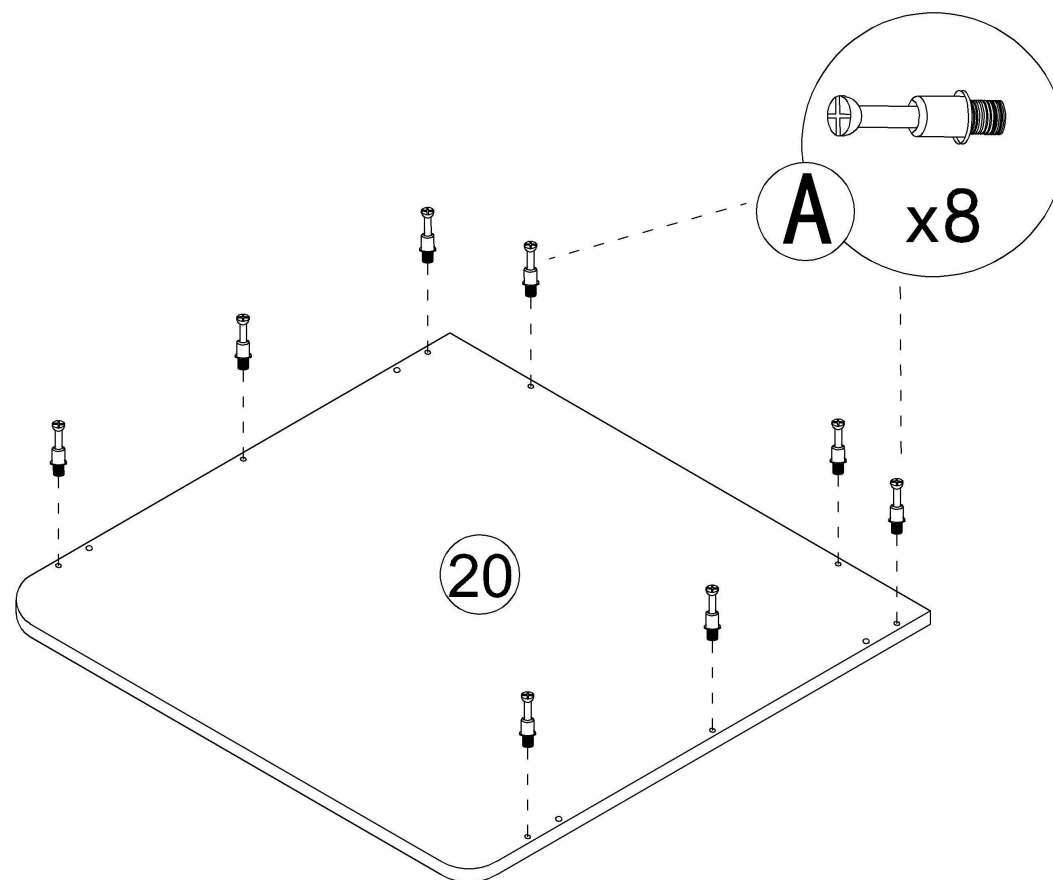

Step 46

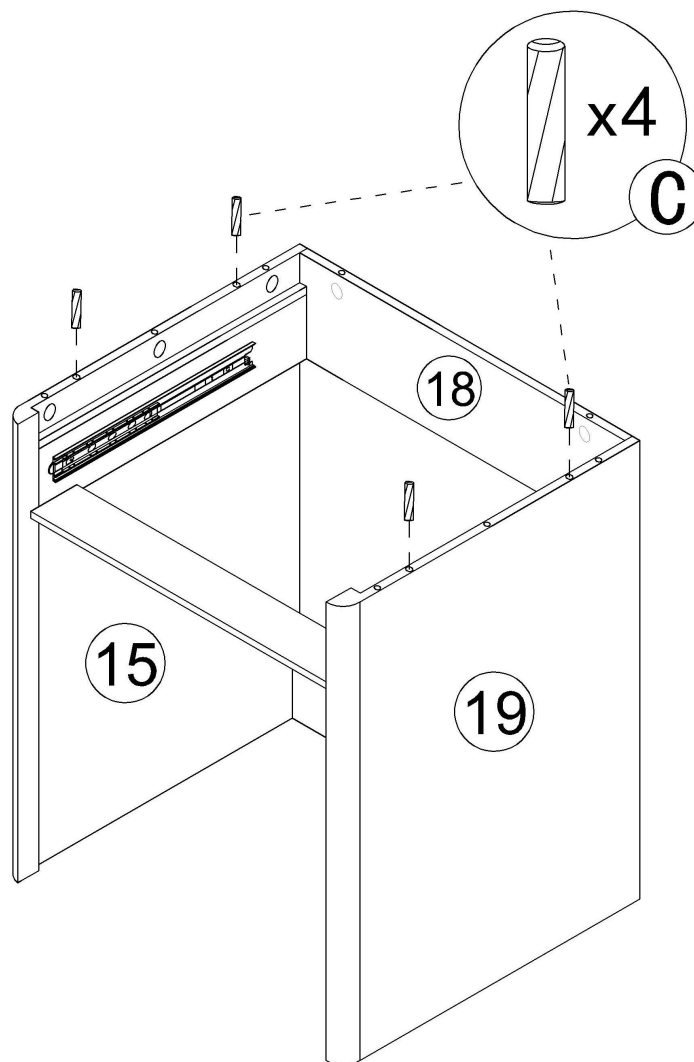



Step 47



B












x8

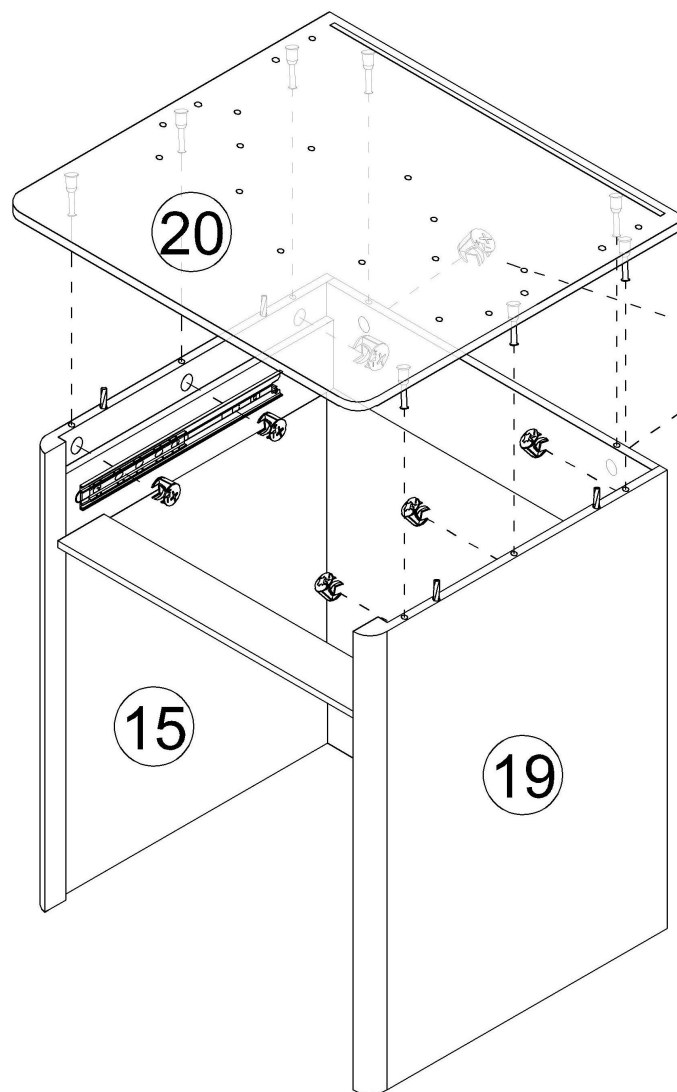





Step 48

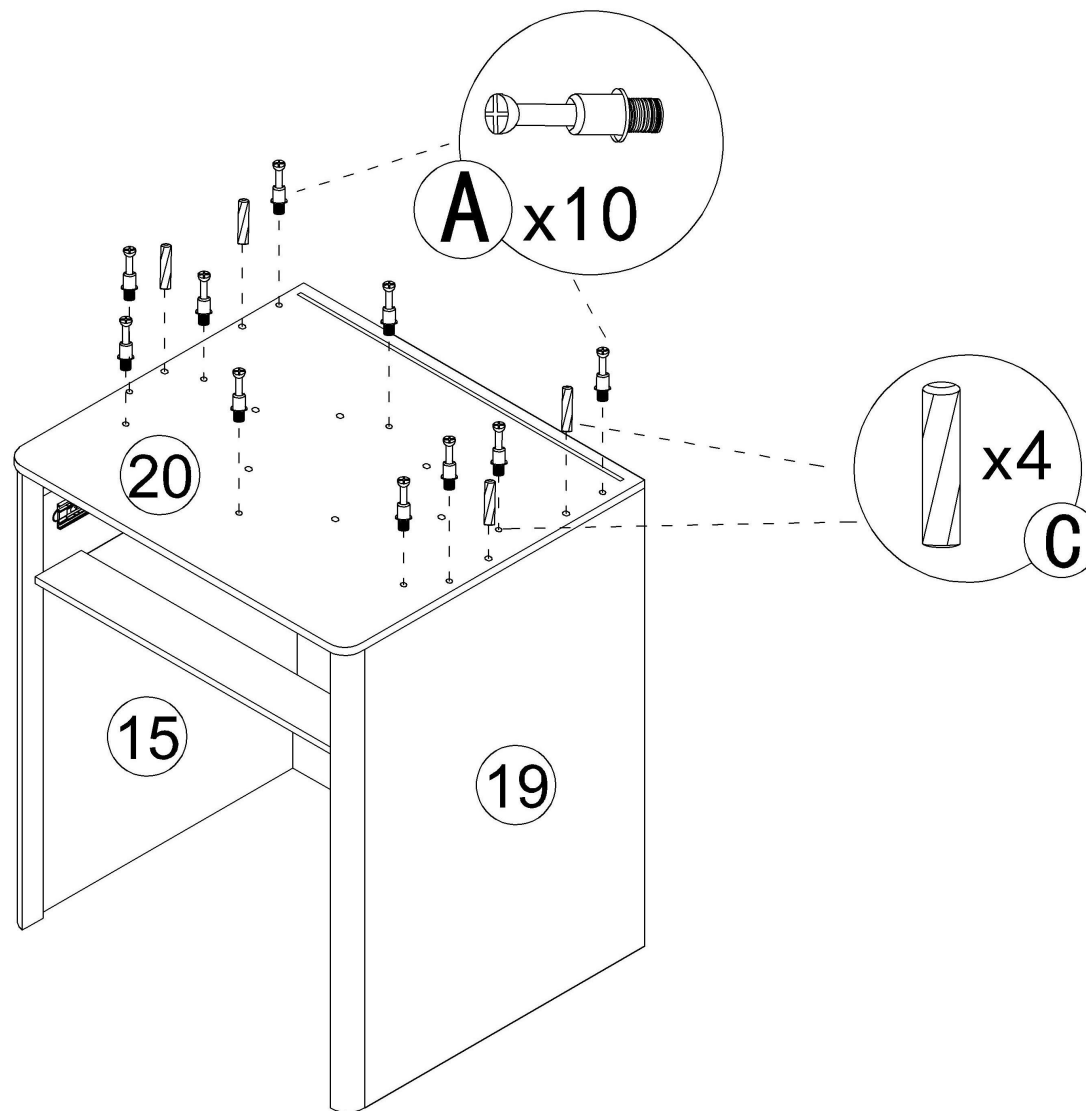




A		18pcs
B		22pcs
C		8pcs
D		2pcs 1pcs
F		2pcs 1pcs
G		2pcs 1pcs
H		4pcs 2pcs
I		2pcs 1pcs
K		8pcs
M		4pcs

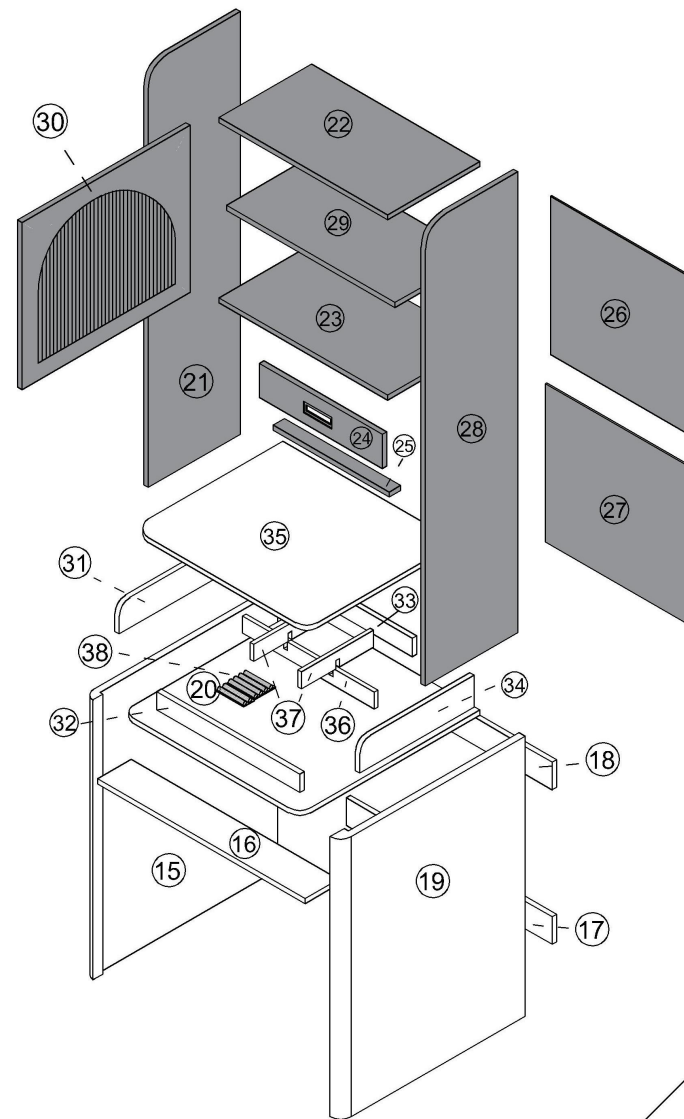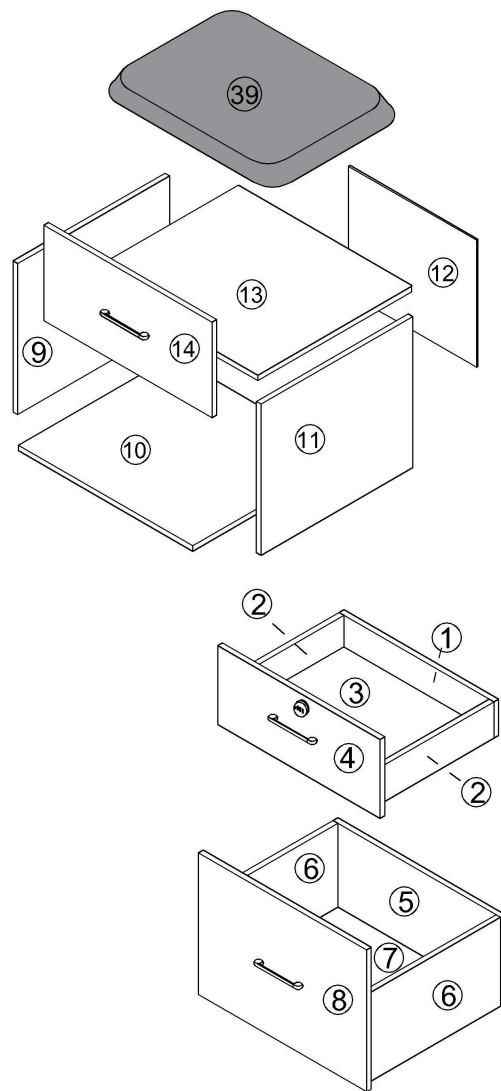

Step 49

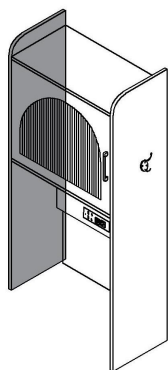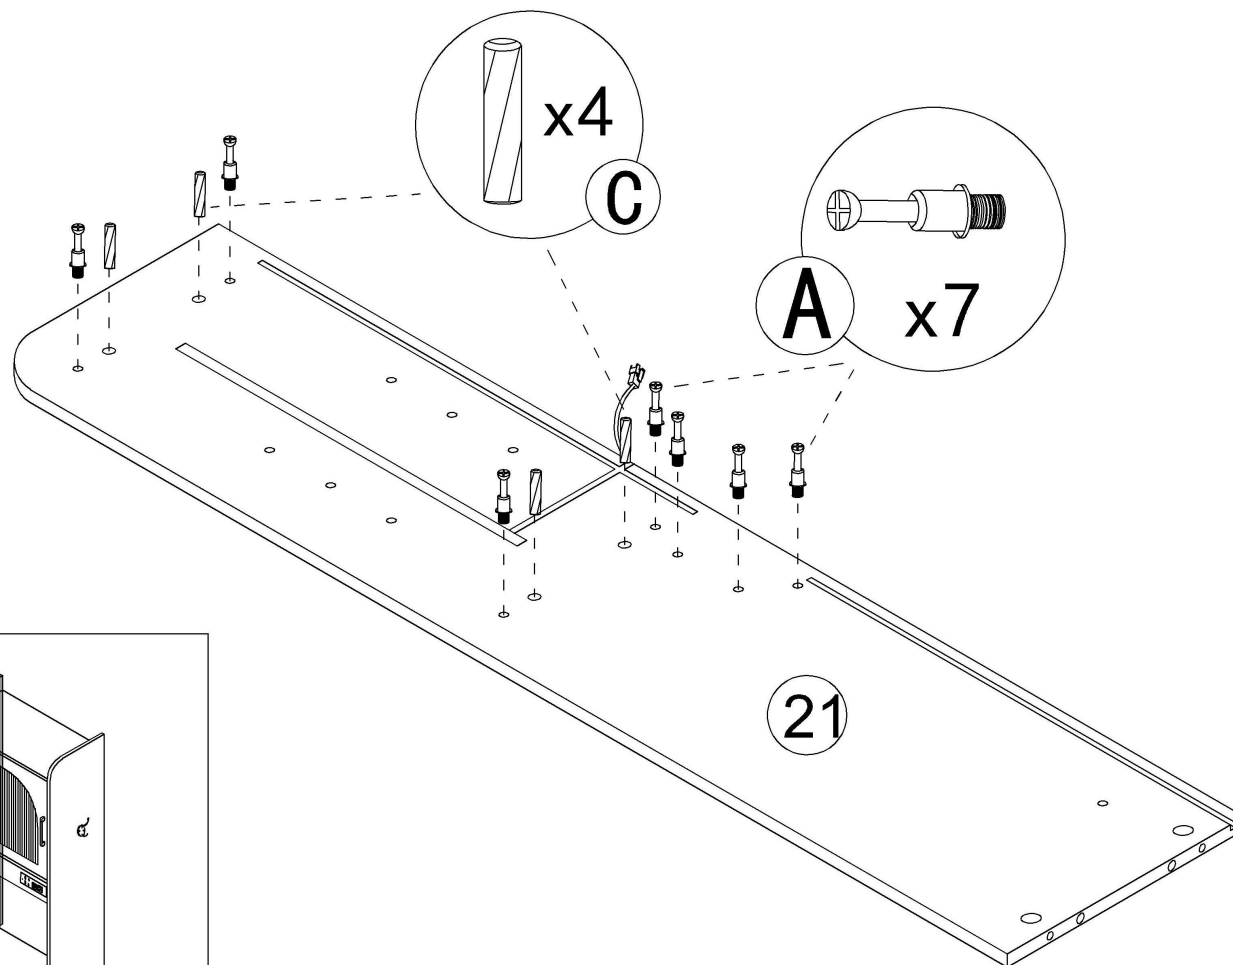

Step 50

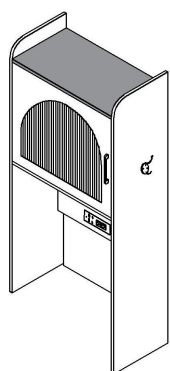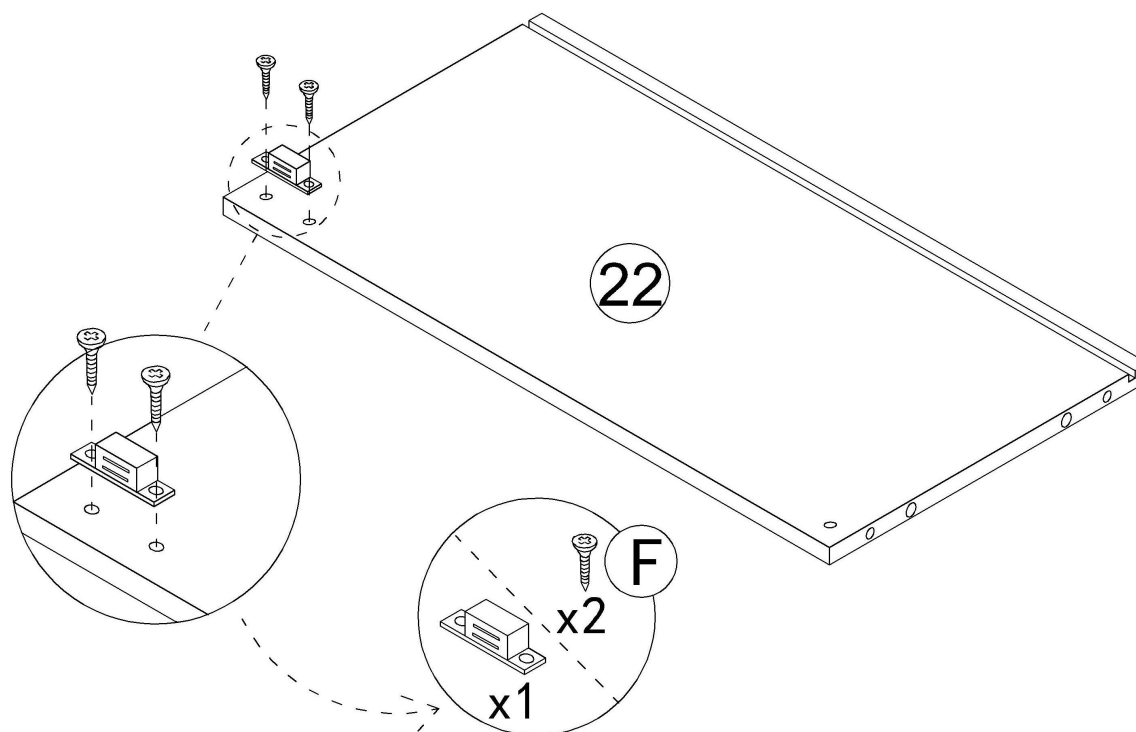


Step 51

B







x2

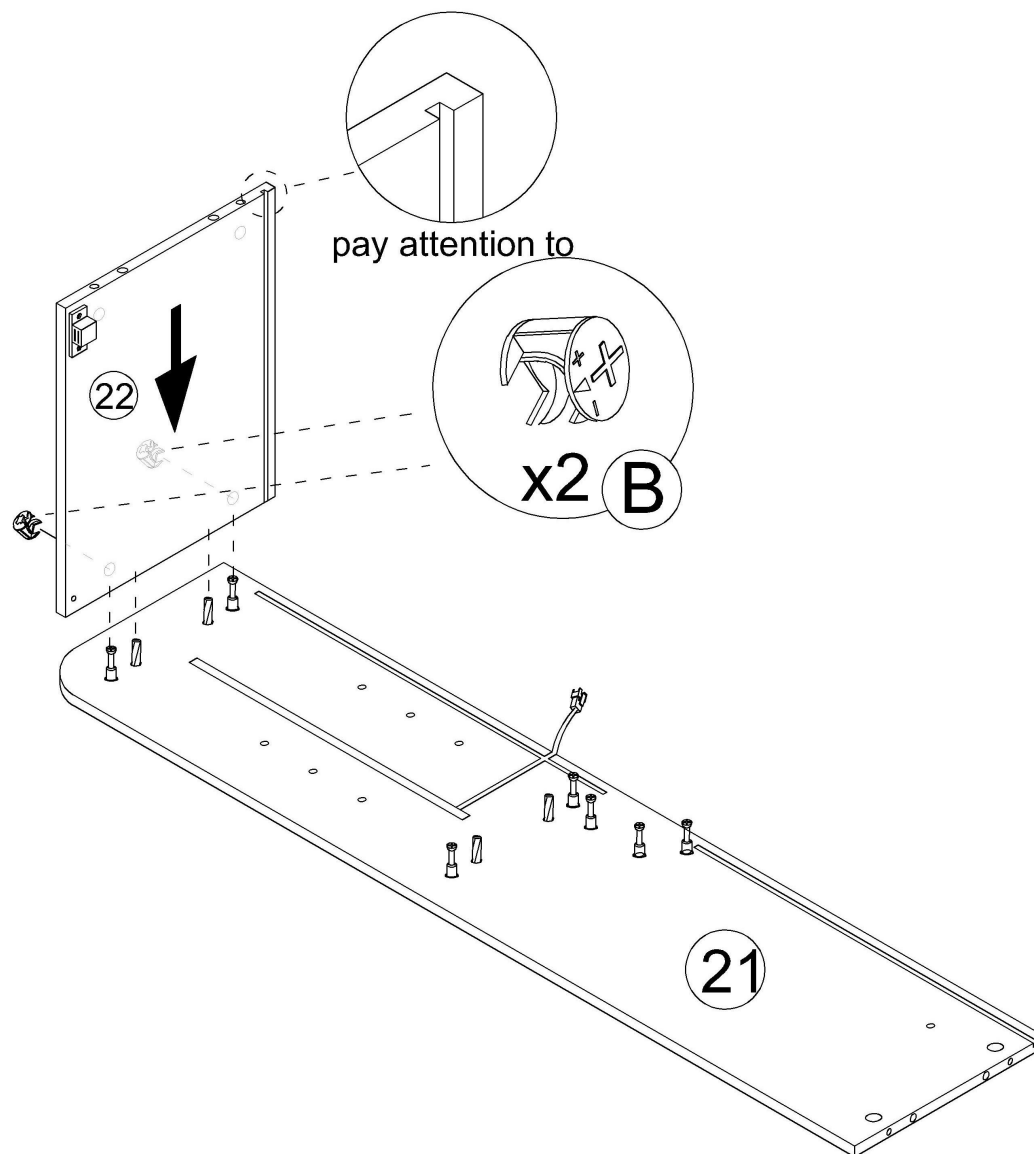

Step 52

A

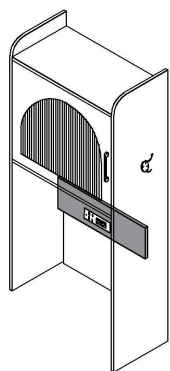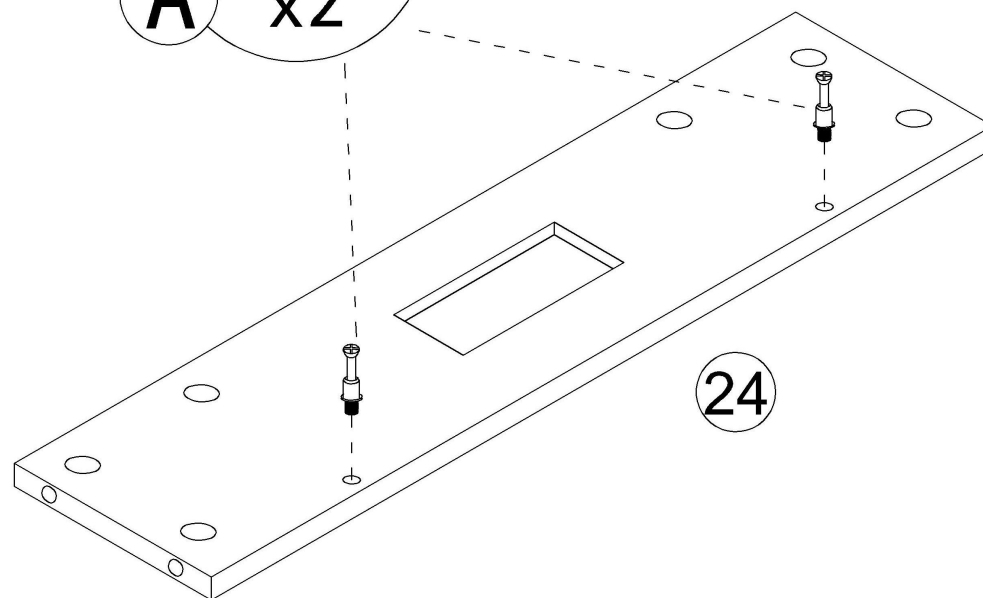


Step 53



B



x2



pay attention to

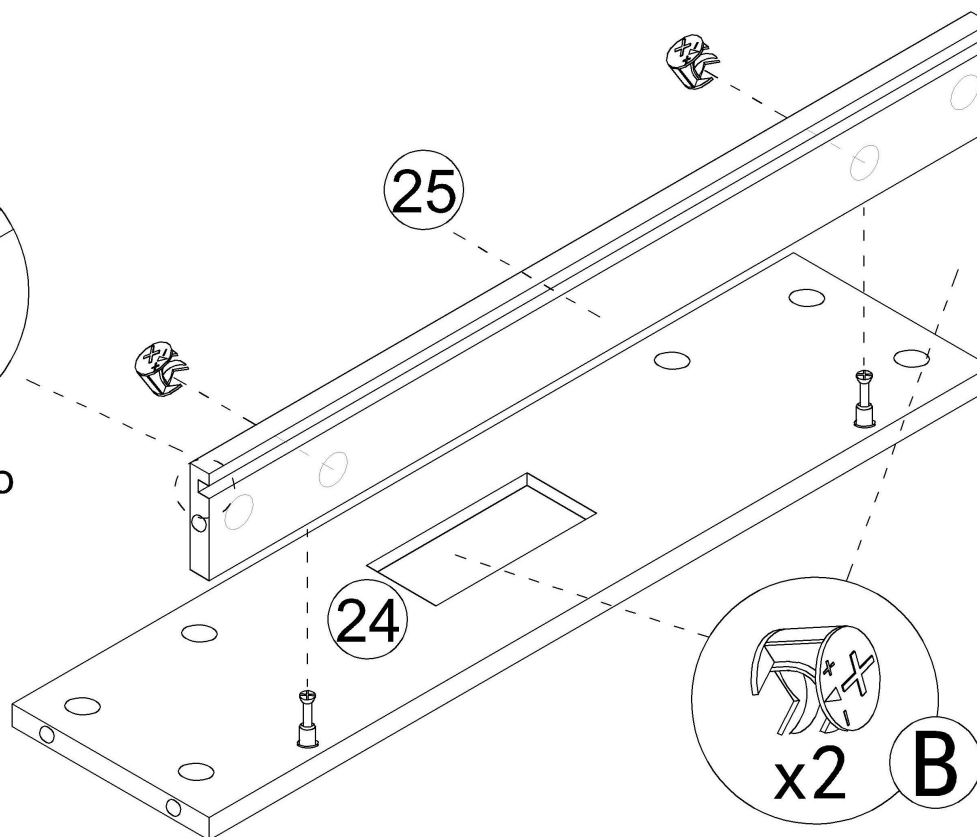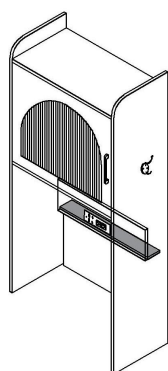

25

24





x2

B

Step 54

A

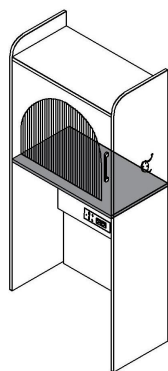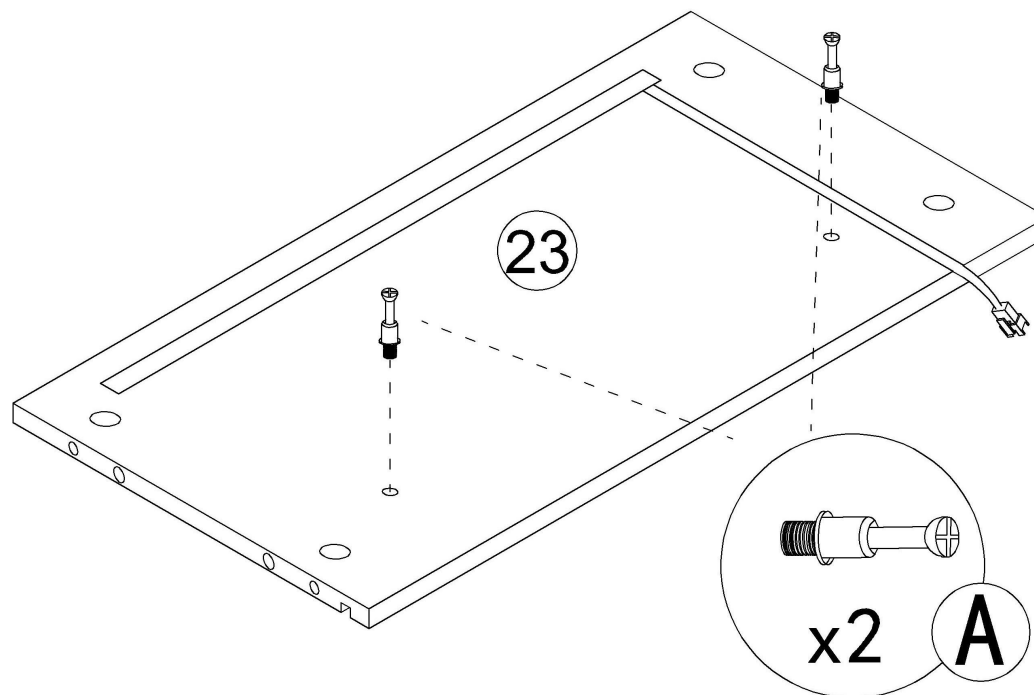


59

Step 55

B




x2


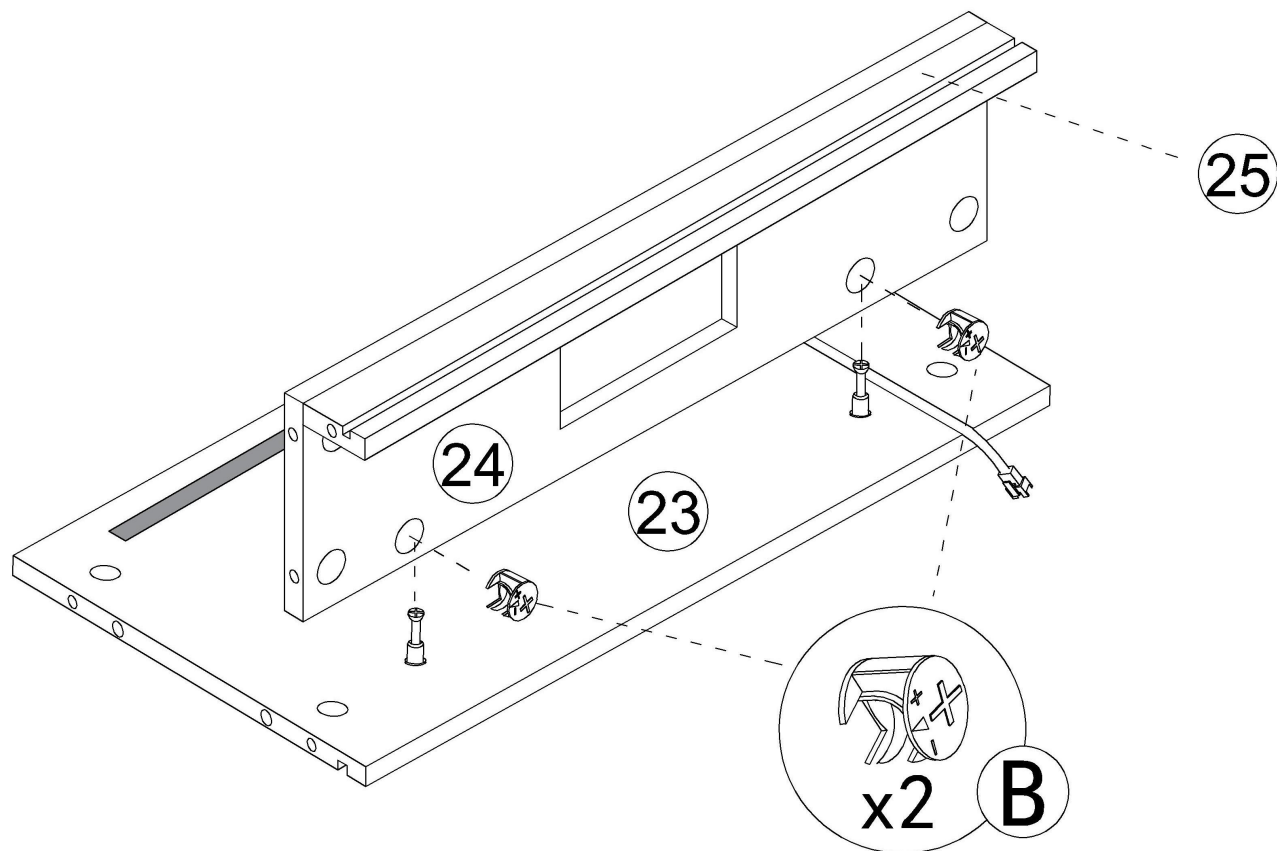


60




Step 56

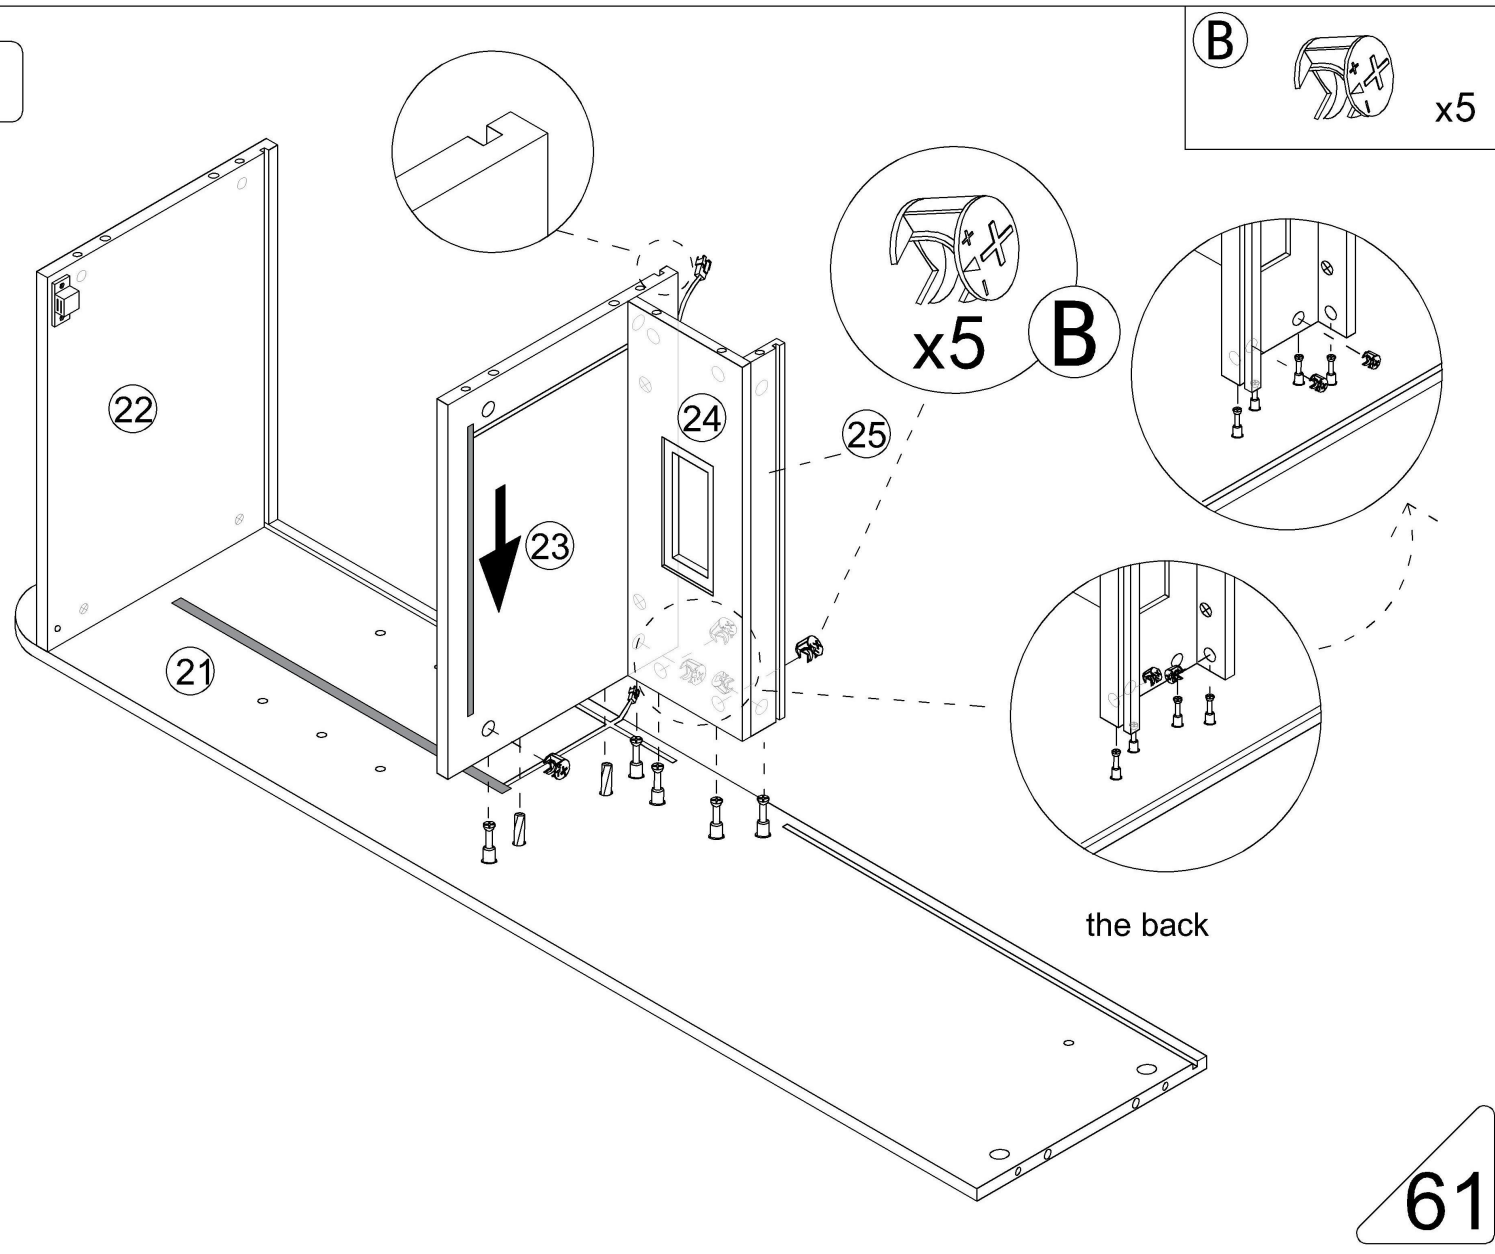

Step 57



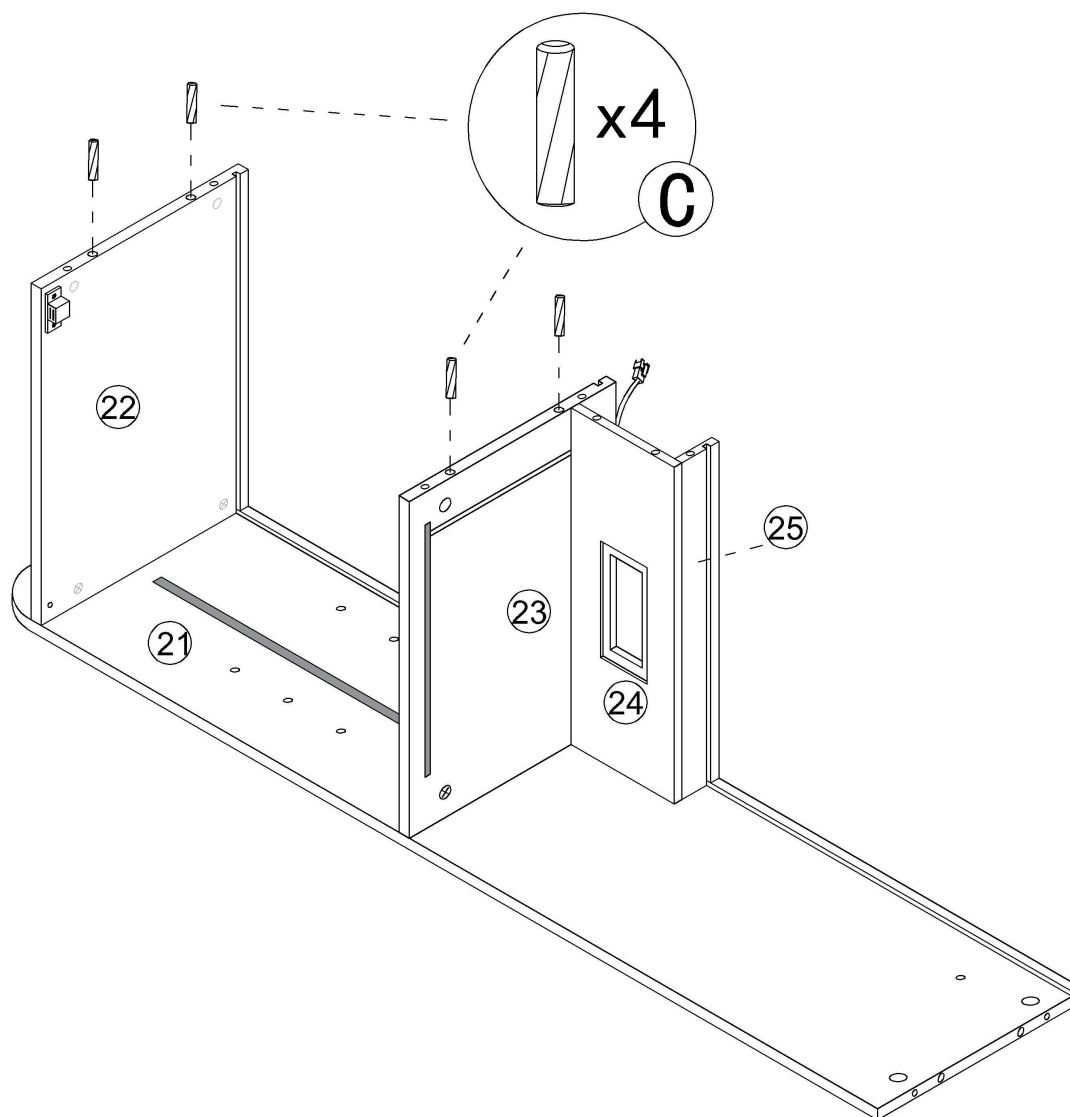



Step 58

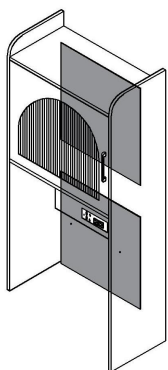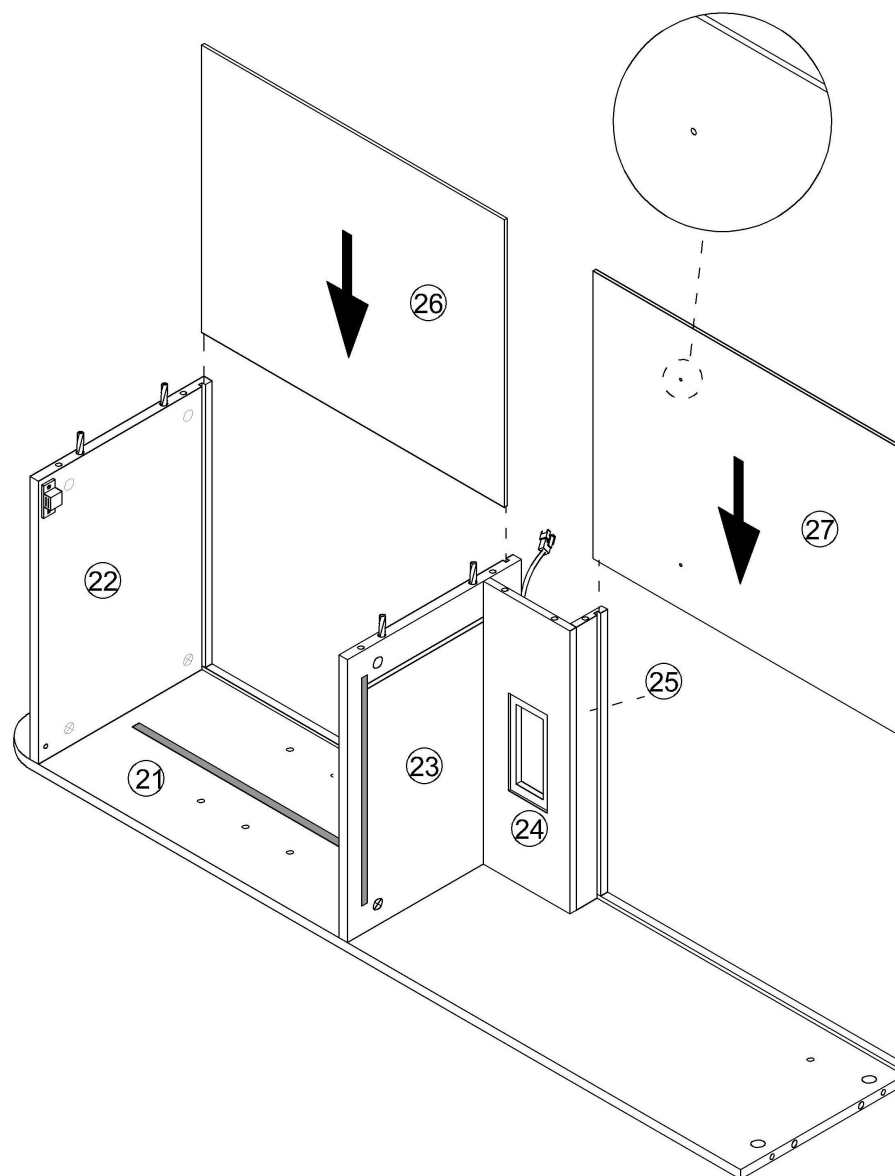

Step 59

A

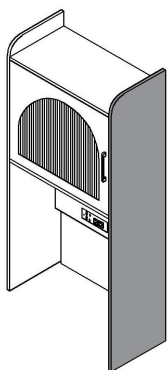
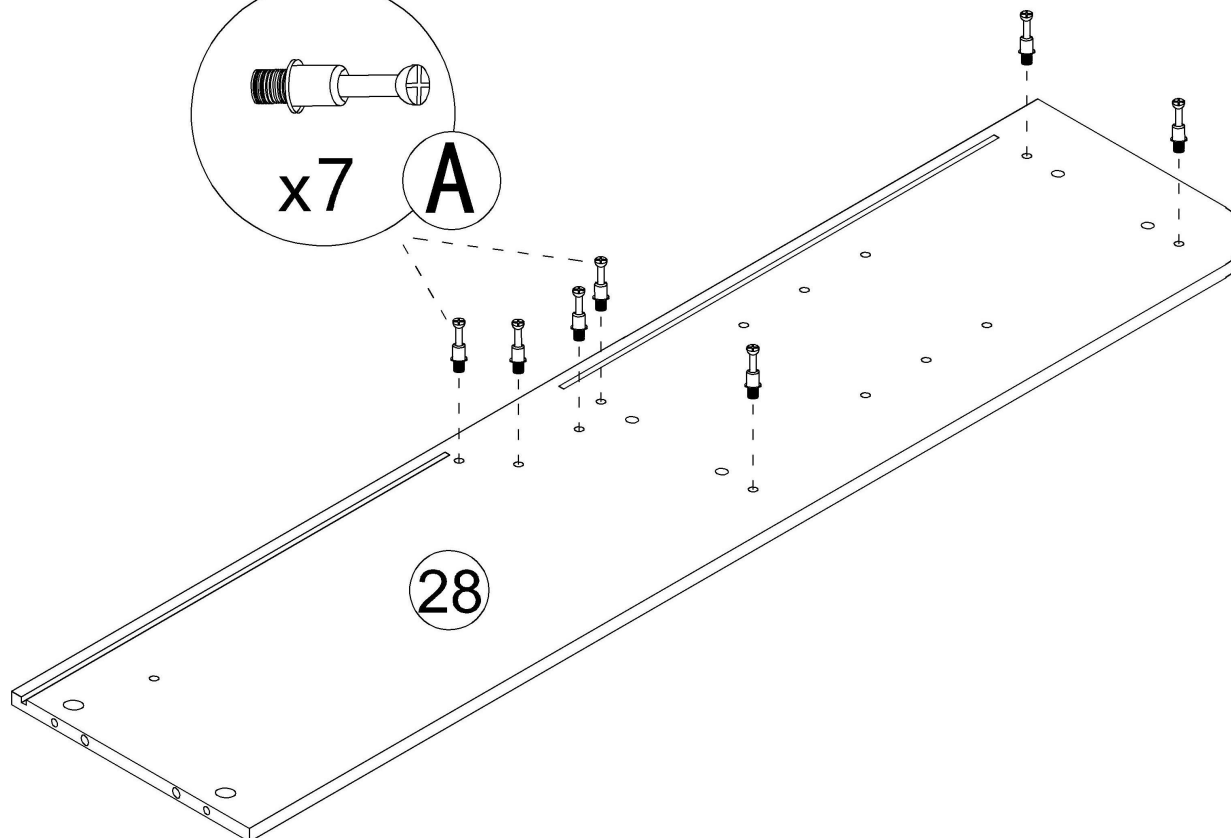




Step 60

B



x7

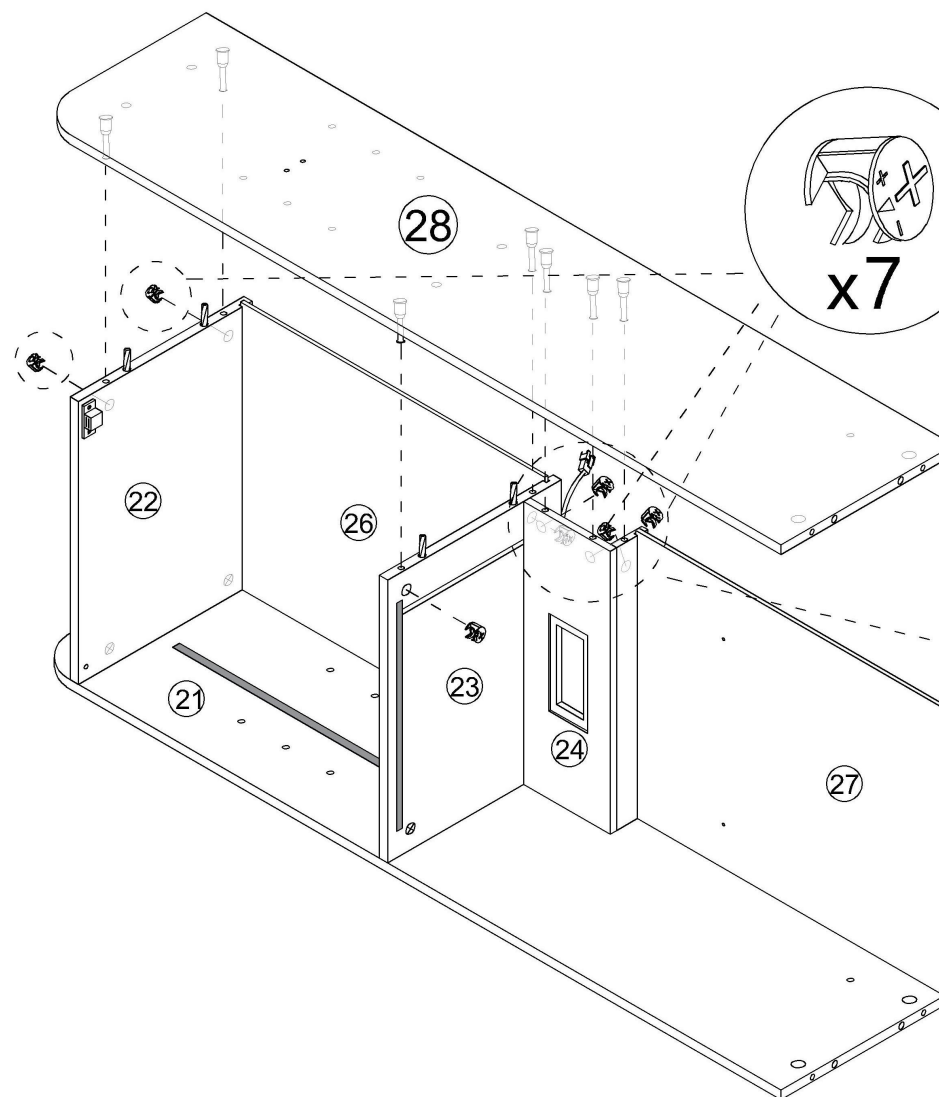


the back

Step 61

B




x4




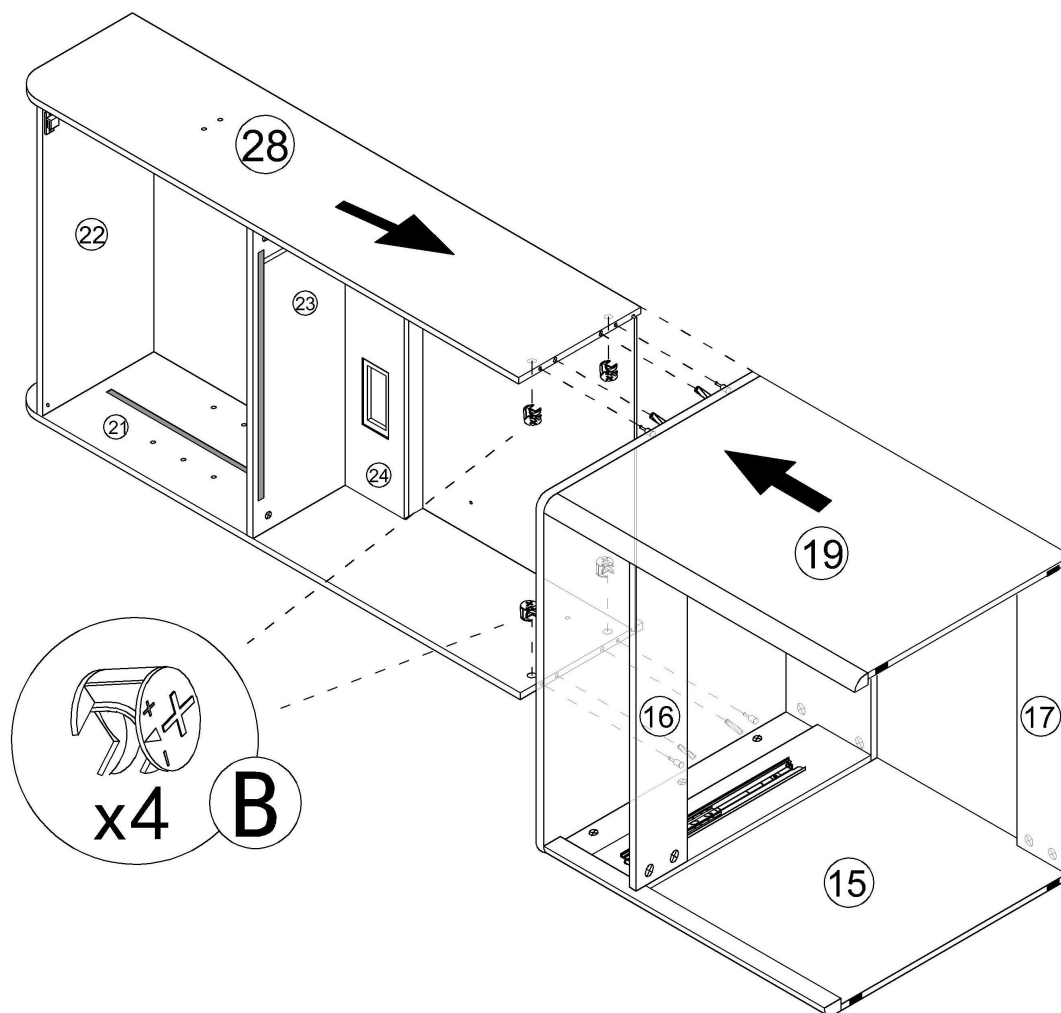


66


Step 62

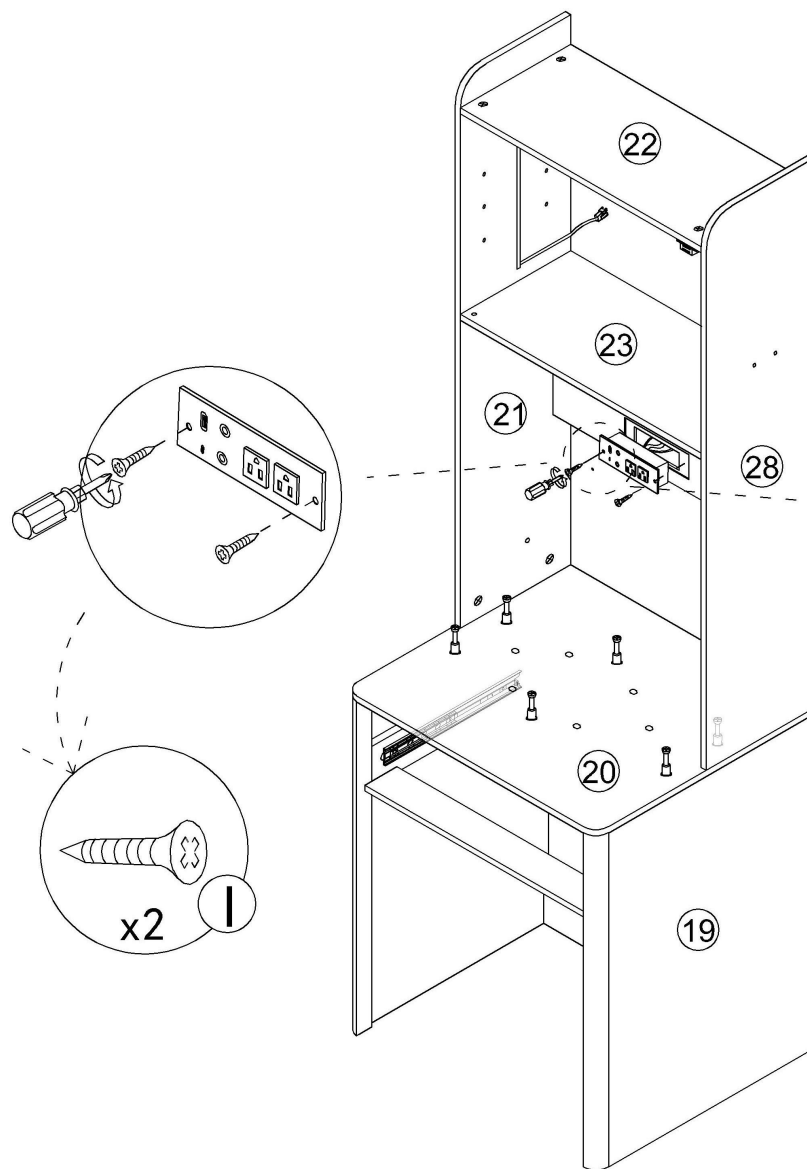


I



Step 63

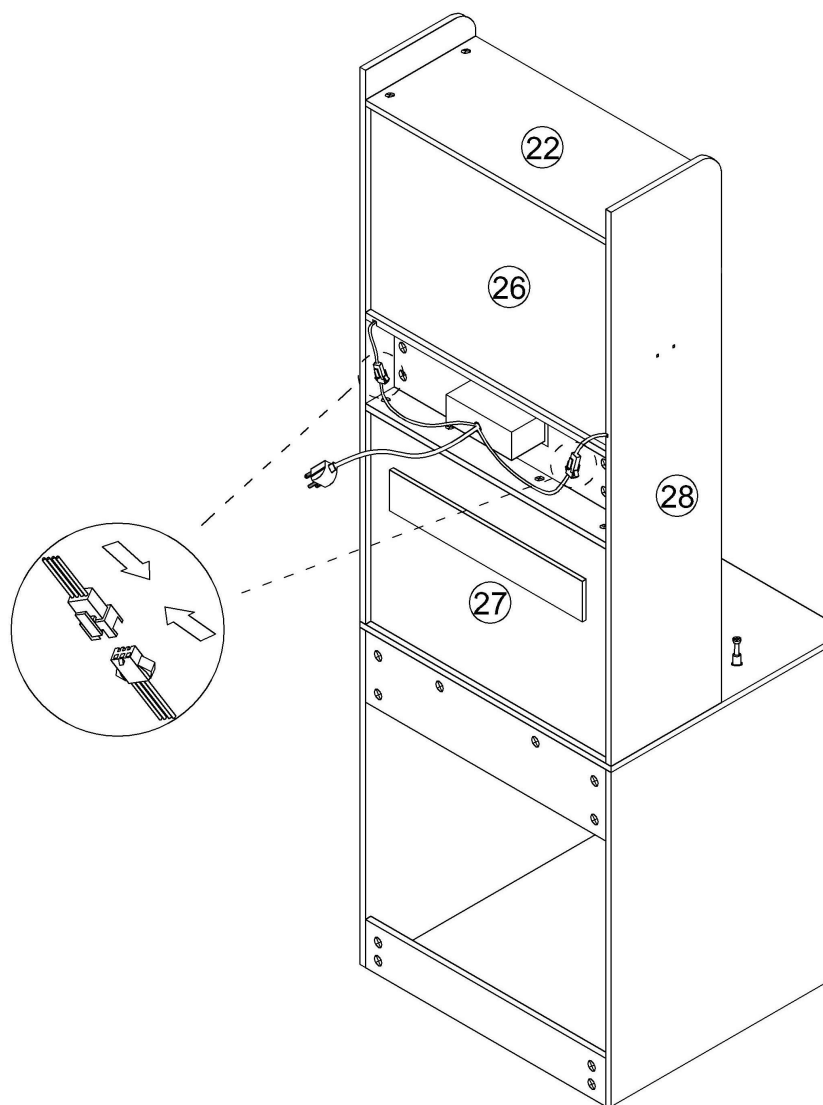


Step 64

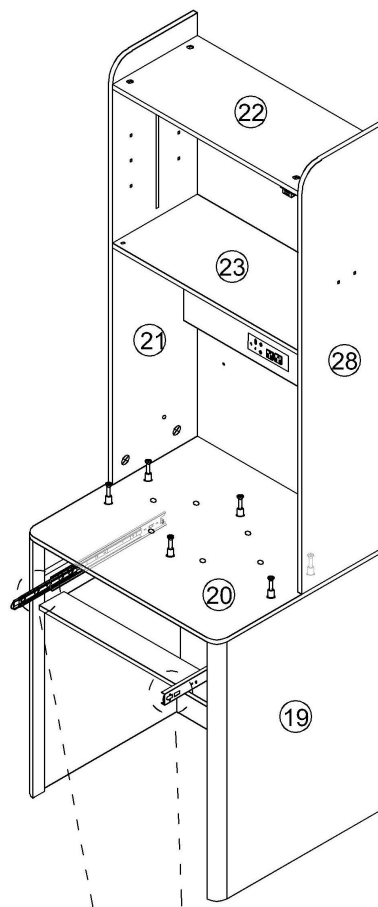


As shown, When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.

Step 65

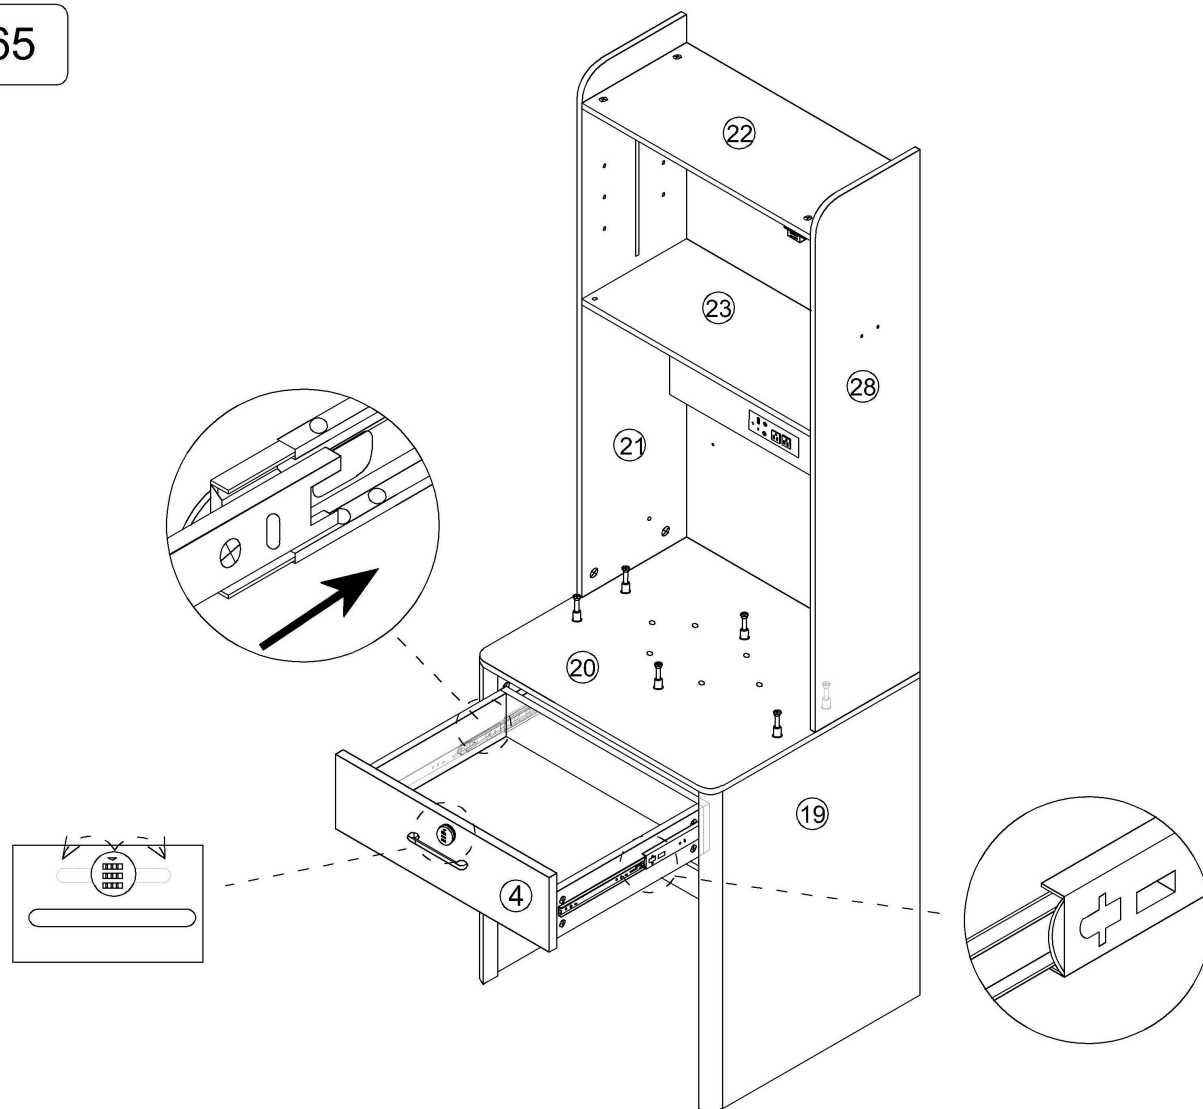


Step 66


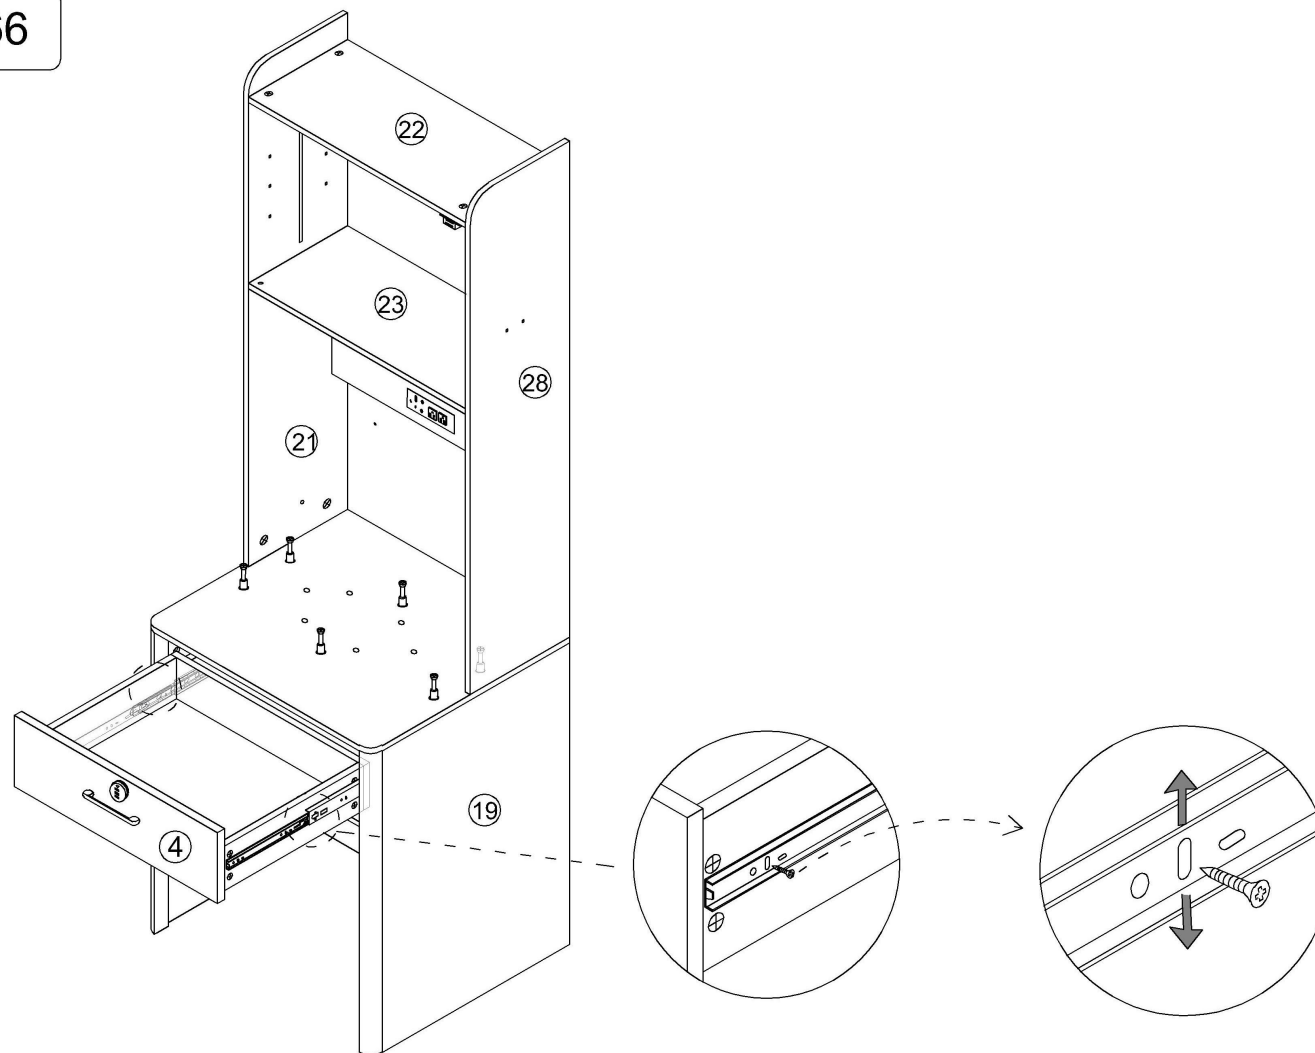


If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap

Step 67

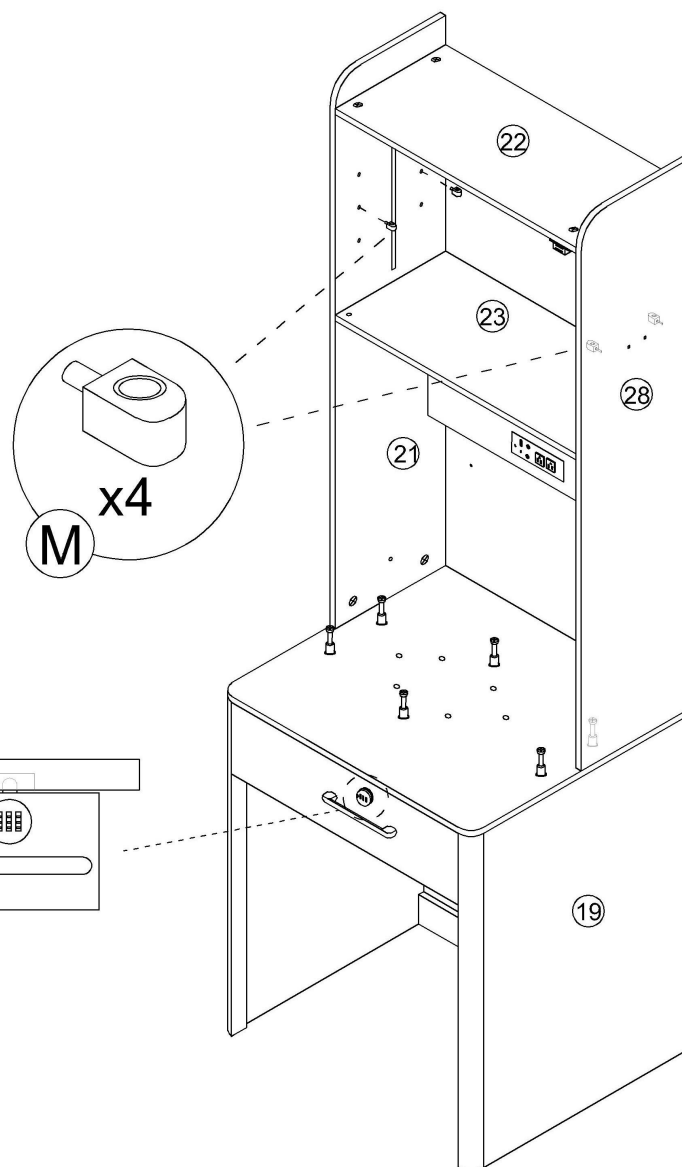


Step 68

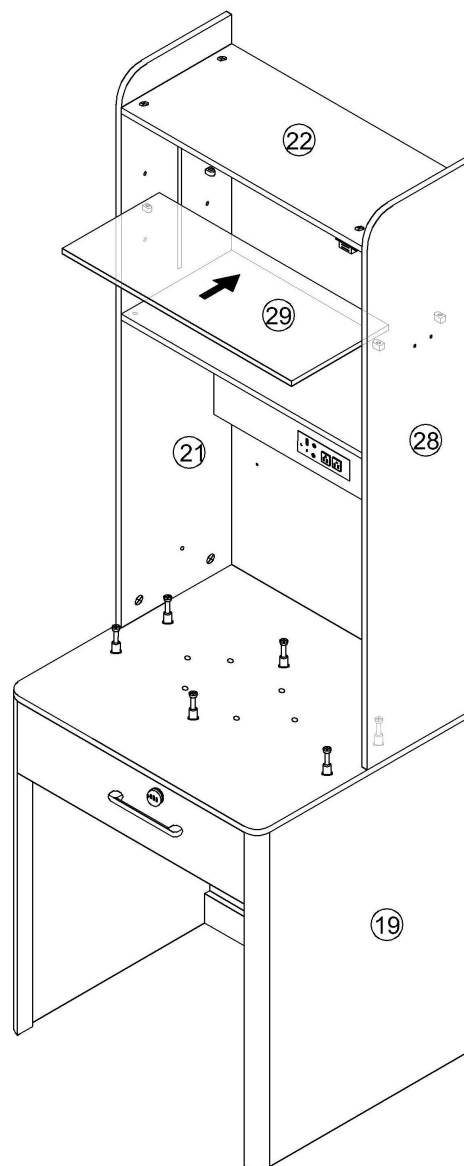

(29) x1


Step 69

H x1	 x1
G x1	 x2





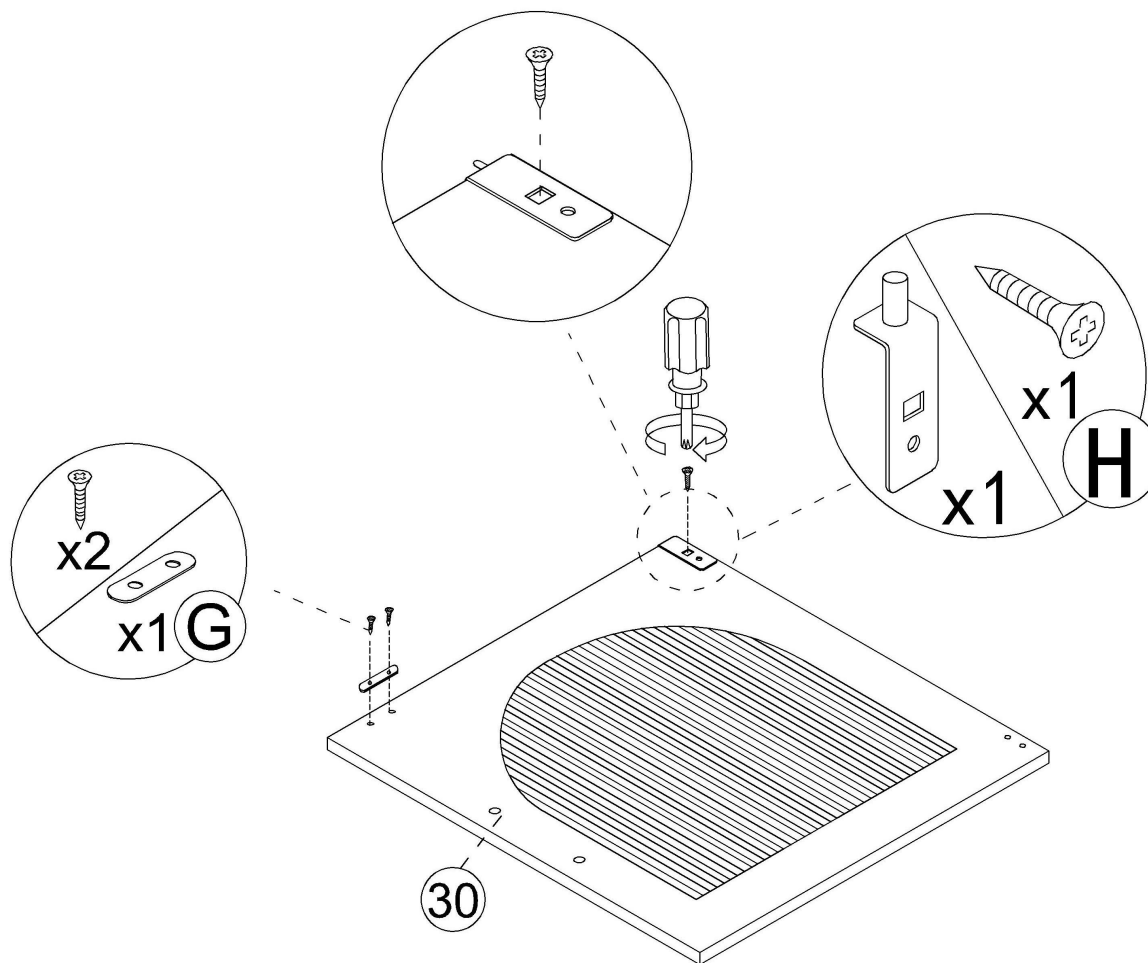


Step 70


H x1

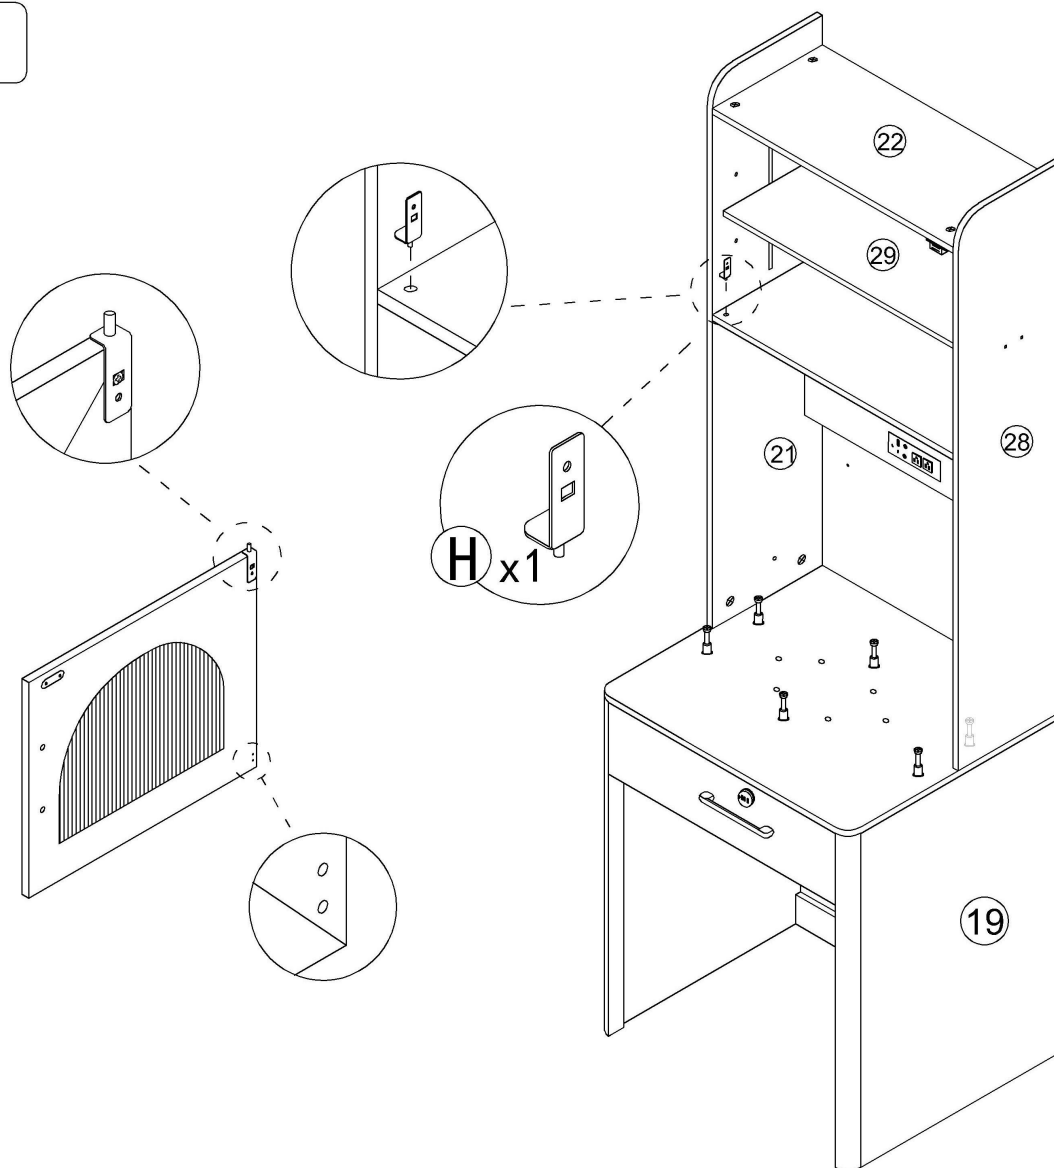


Step 71

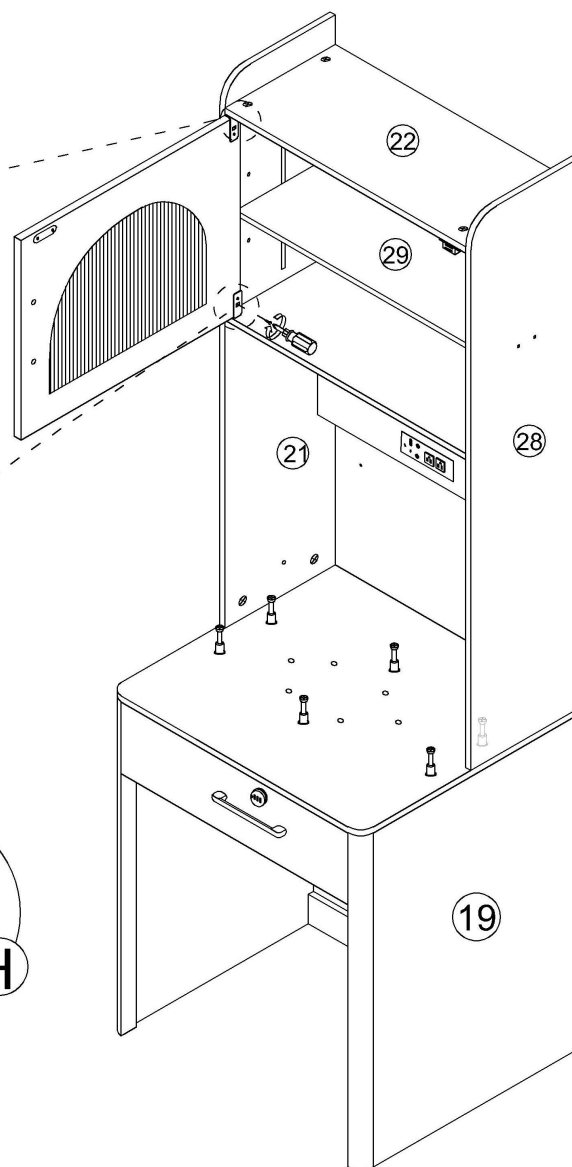

Step 72




Tighten the screw into the fixing hole



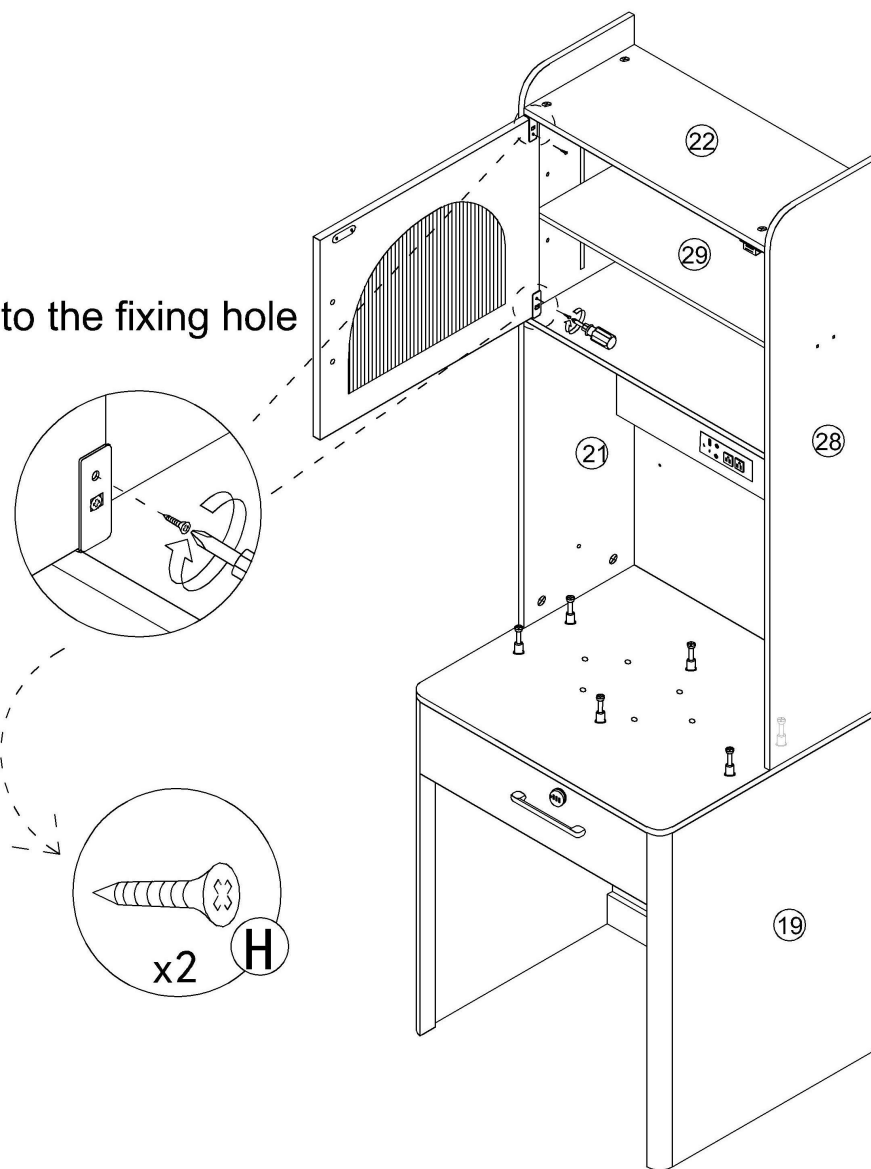


Step 73

D x1 x2


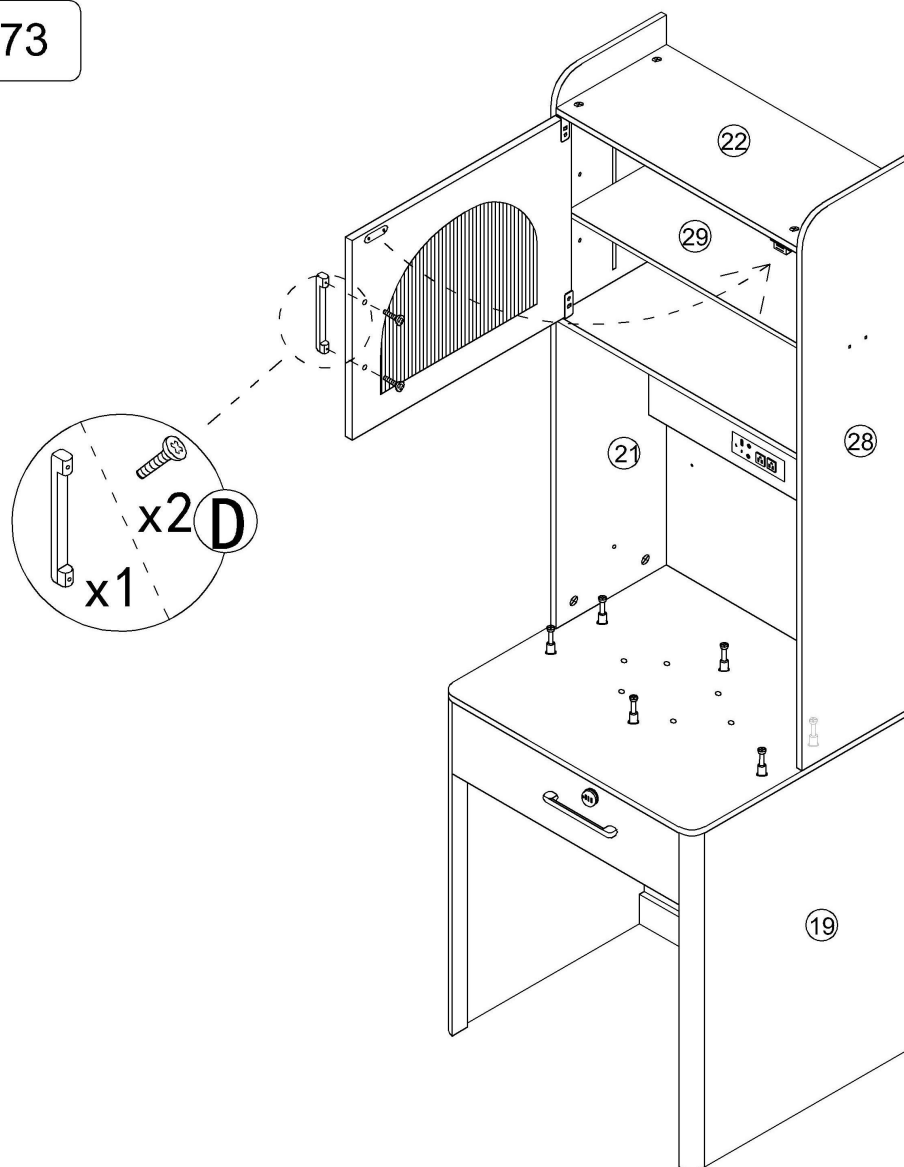


Step 74

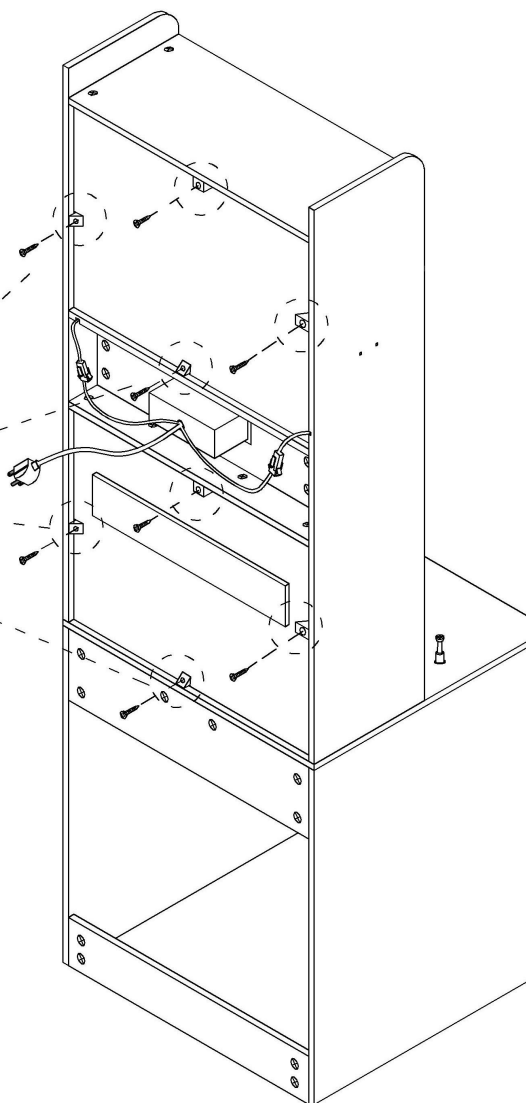

Step 75

A

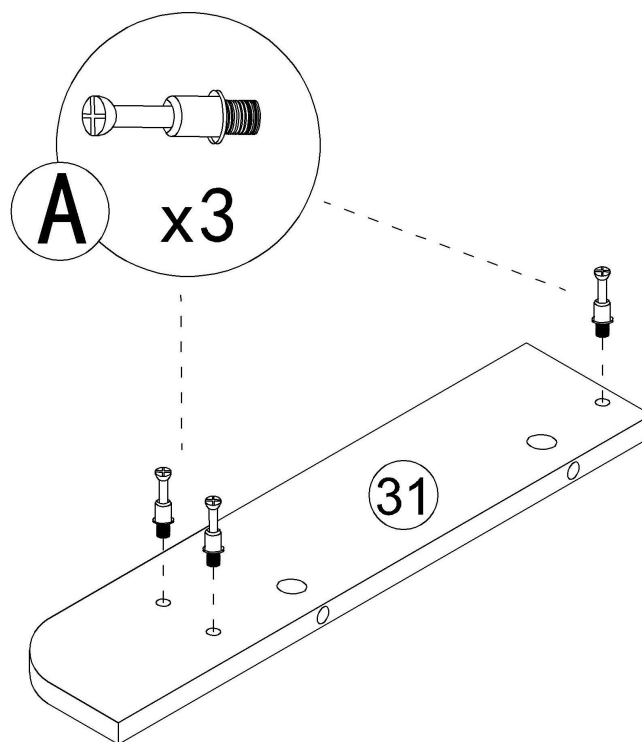


Step 76

B



x2


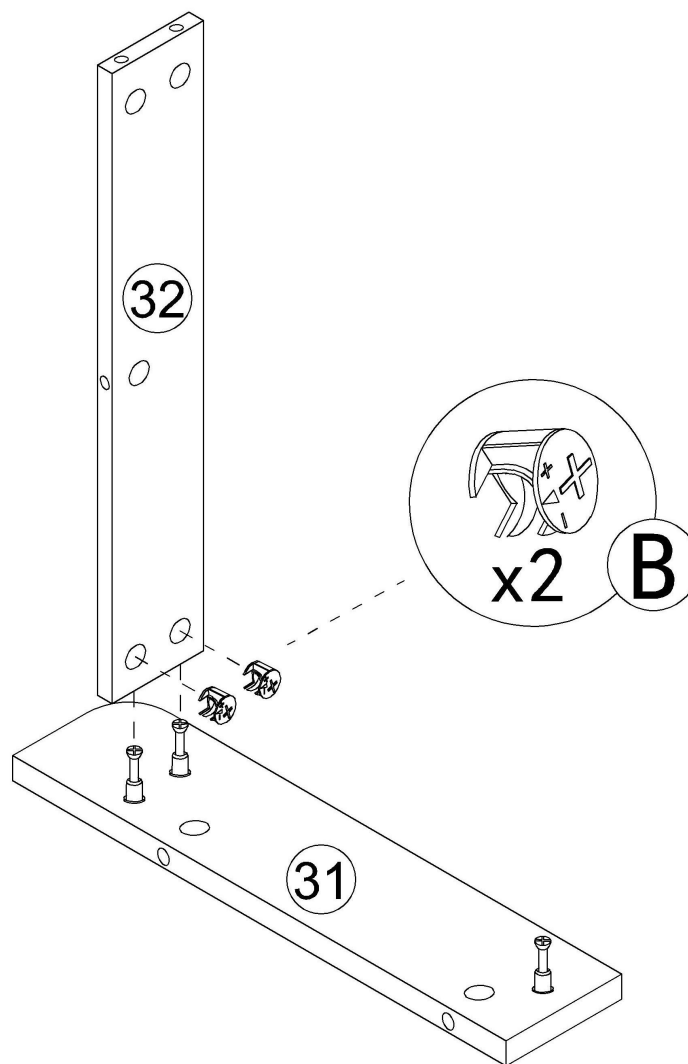


Step 77

B



x1

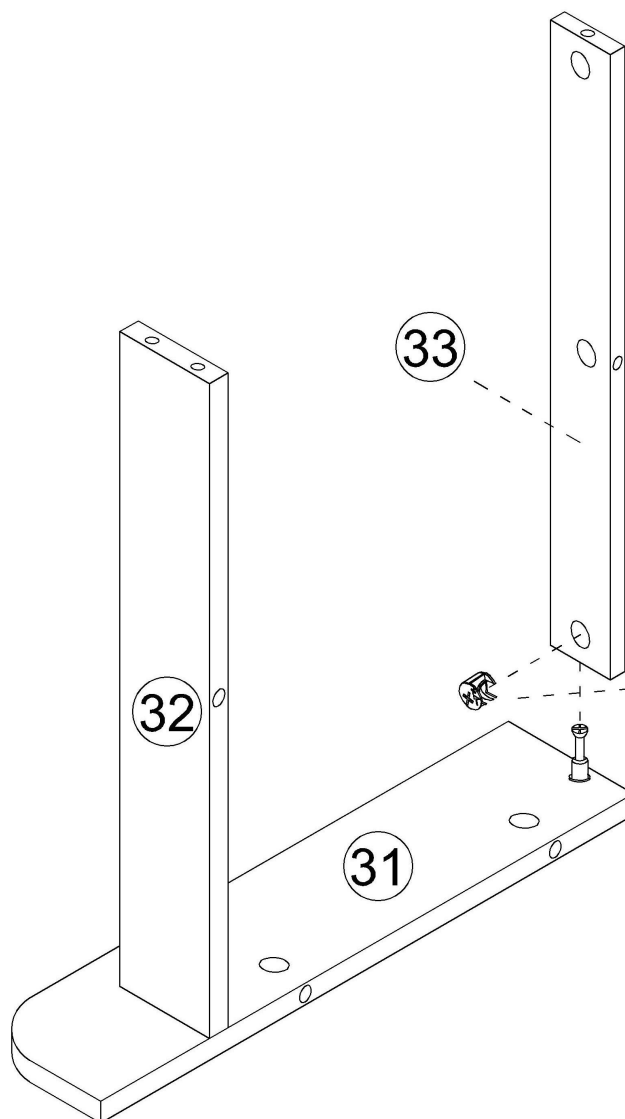


x1

B

Step 78

A


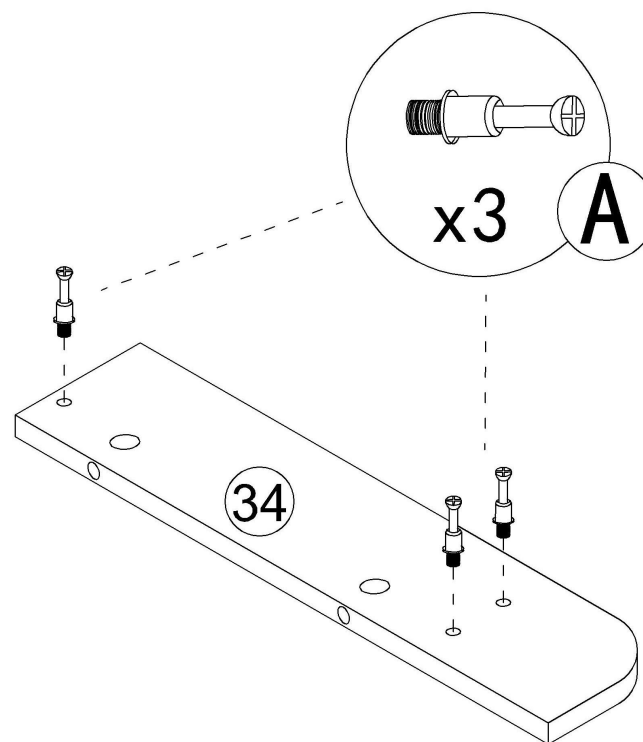


Step 79

B



x3


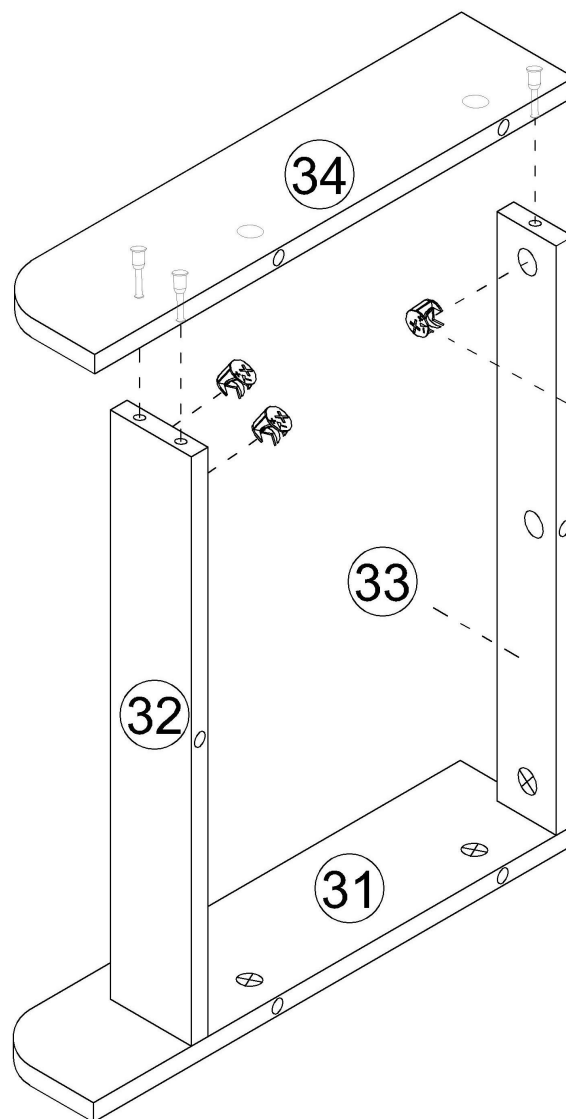


Step 80

B




x6

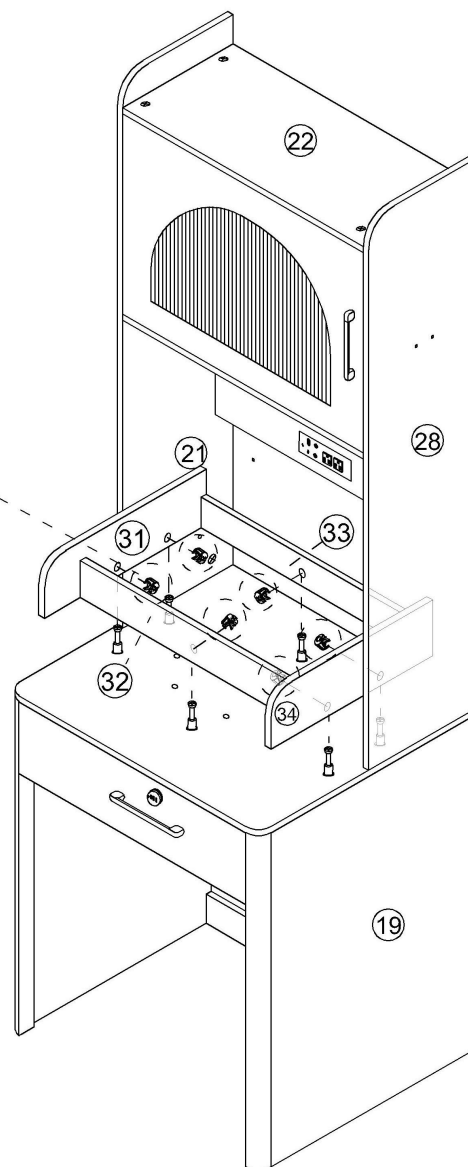


Step 81

C  x6

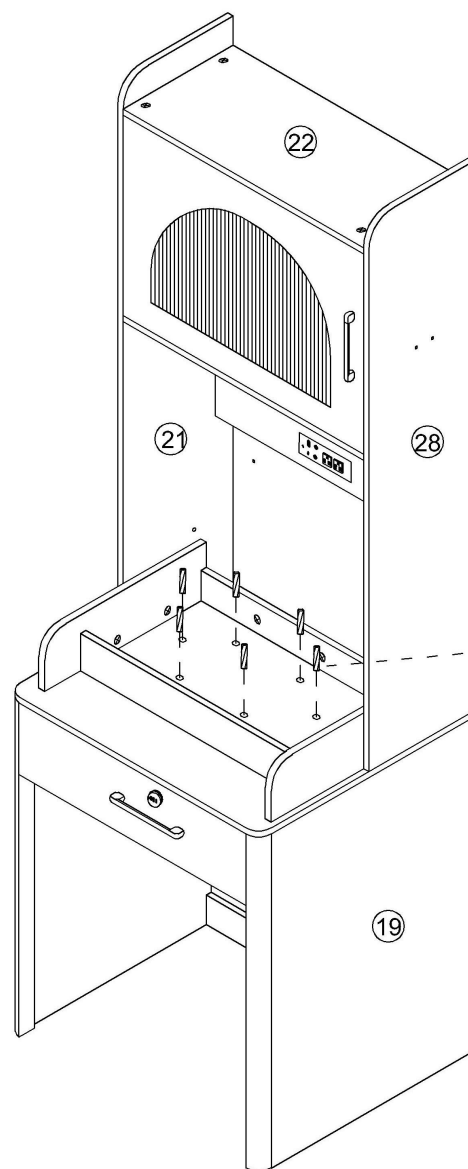


C  x6


Step 82




Insert board number 37 onto board number 36




Step 1

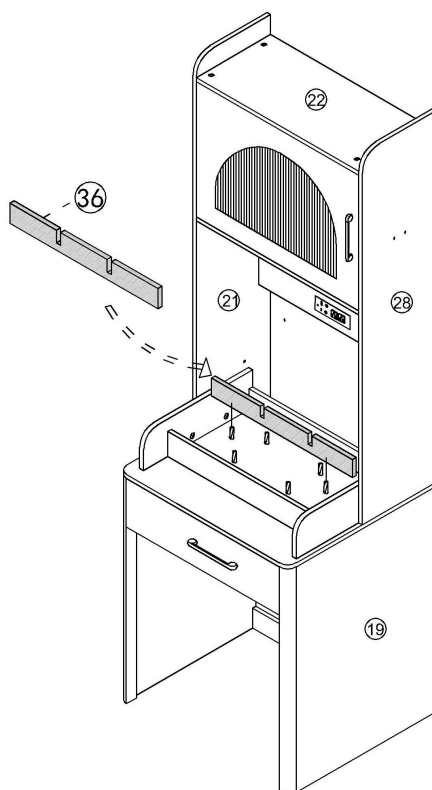




Step 2

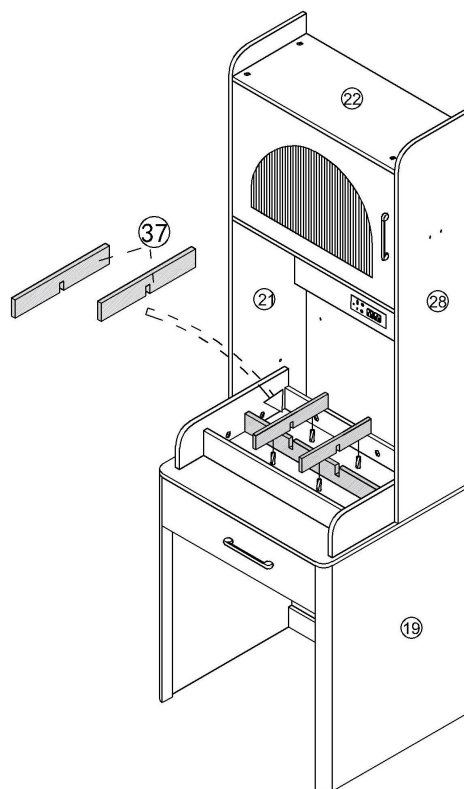


Step 3

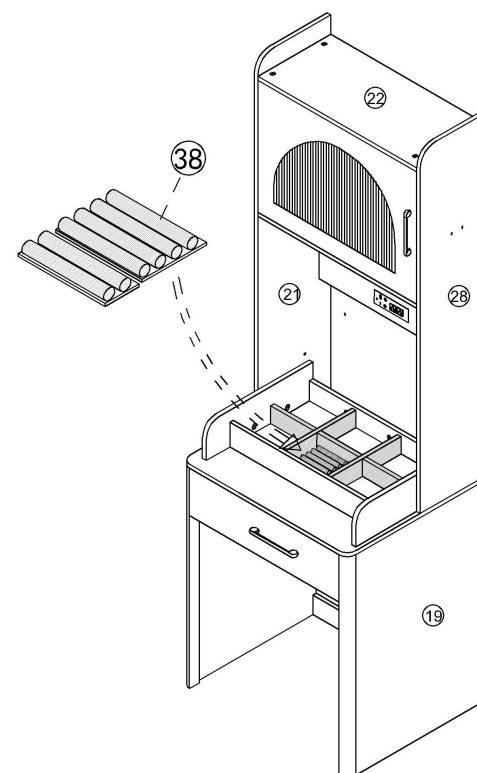



Step 83

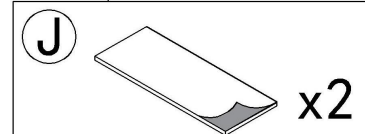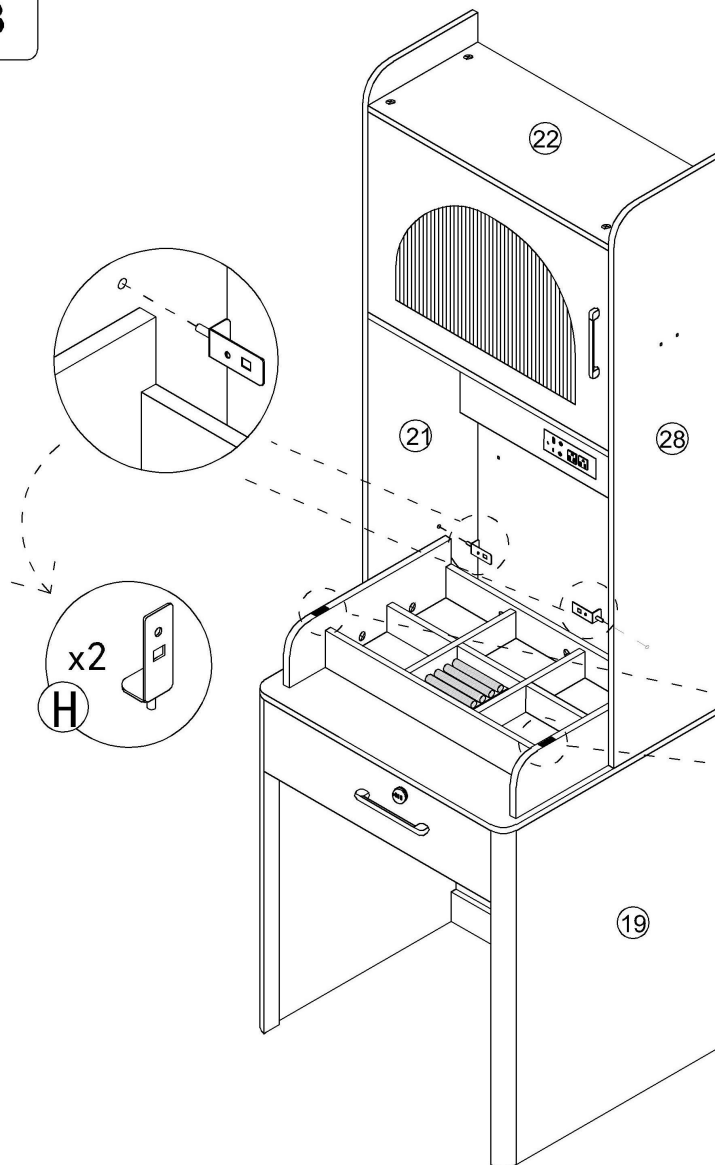

Tear off the foot pad sticker and stick it on the board





Step 84

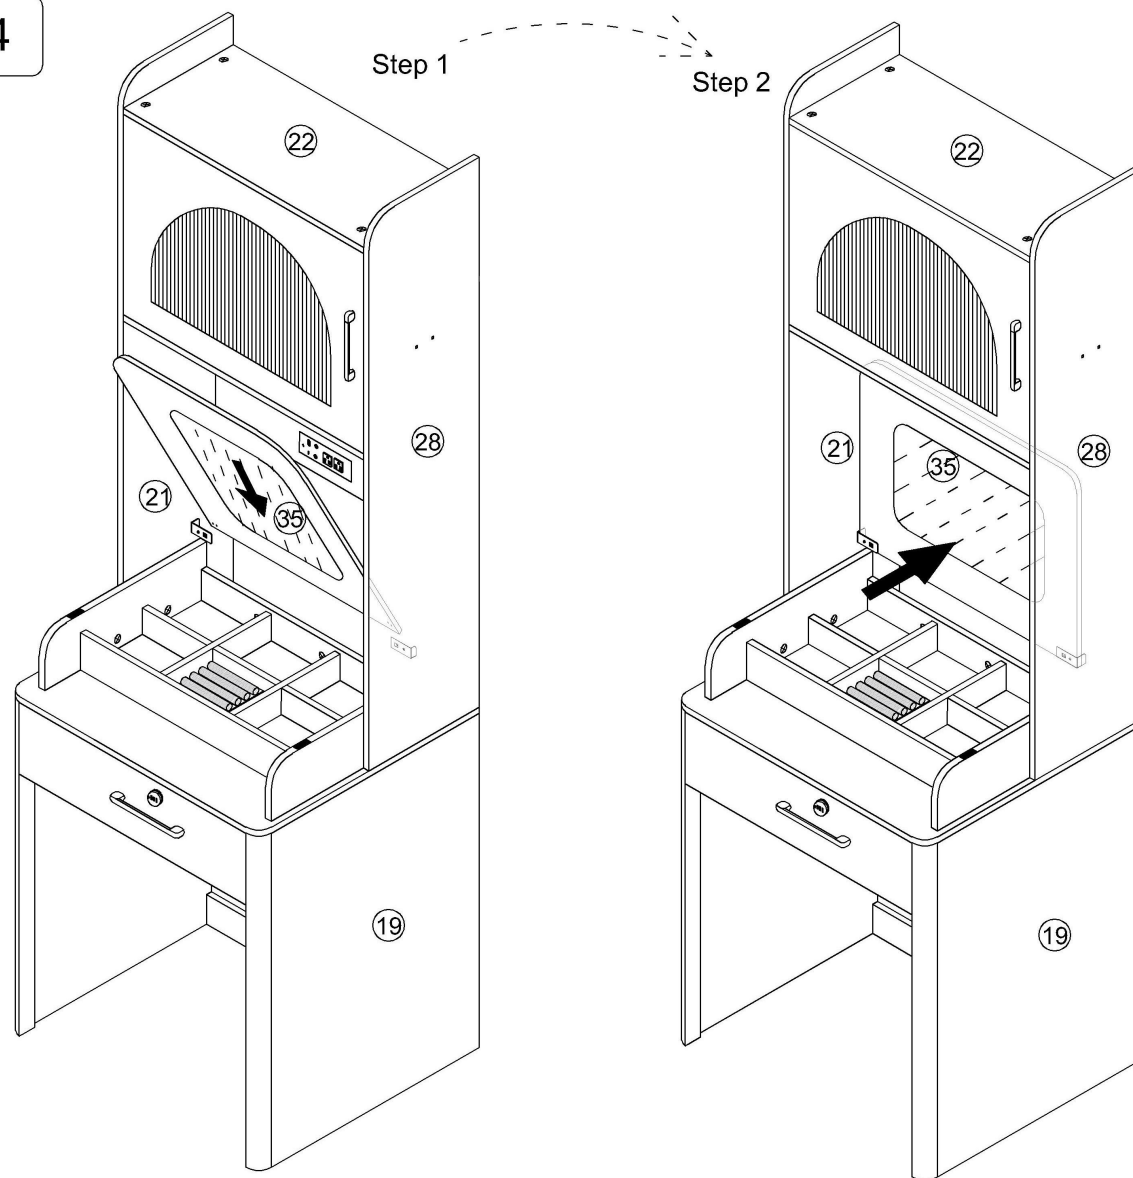

35 x1




90

Step 85


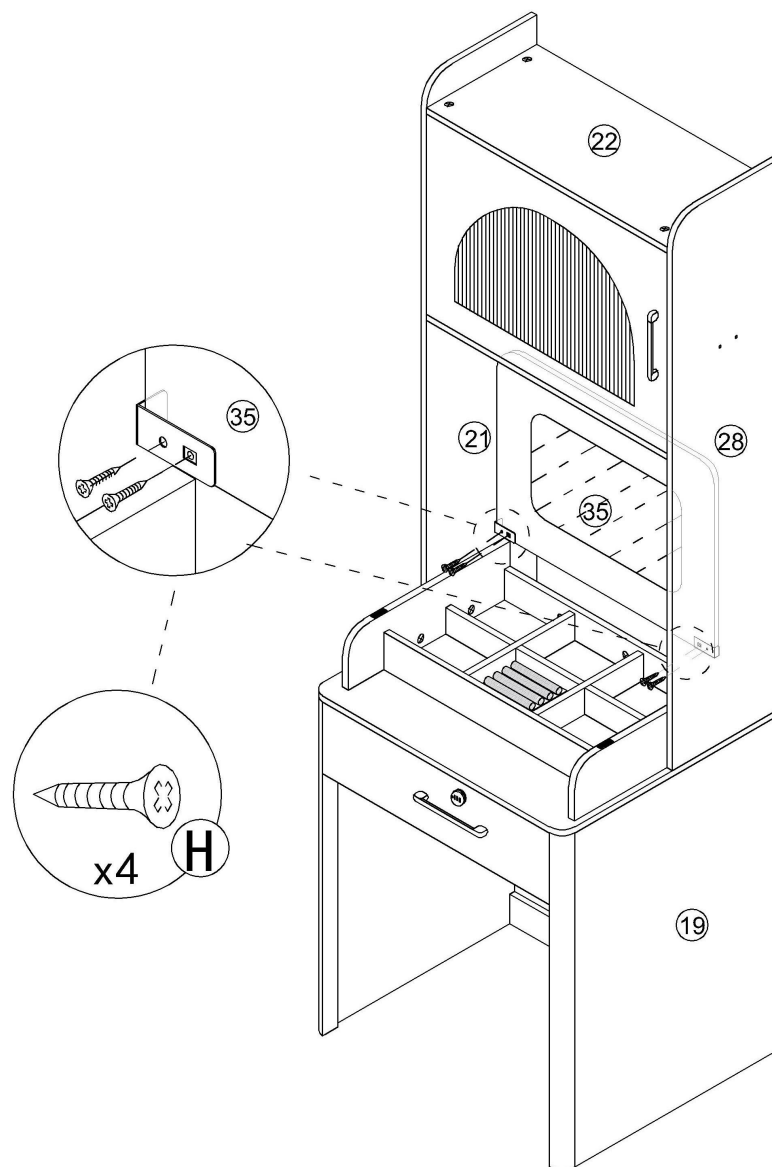



Step 86



Hooks can be installed according to customer needs

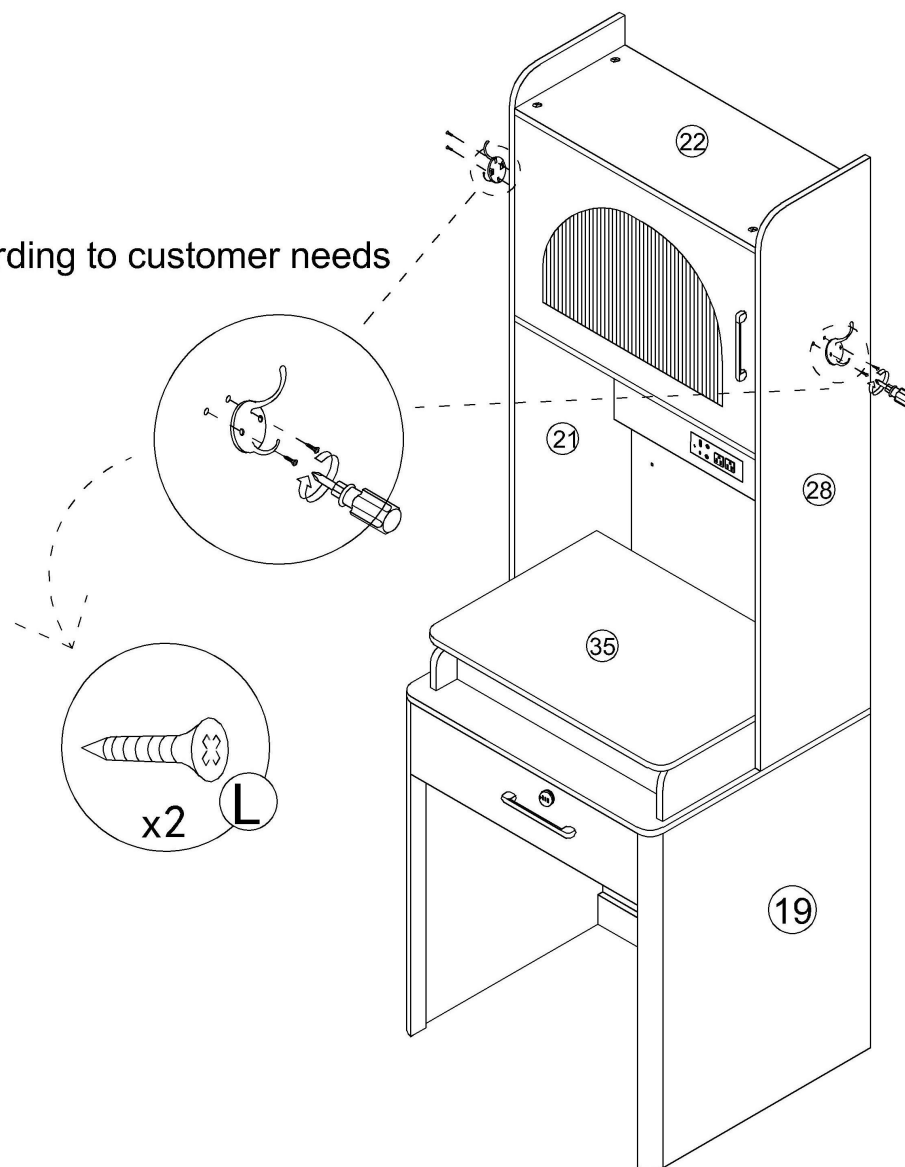


Step 87

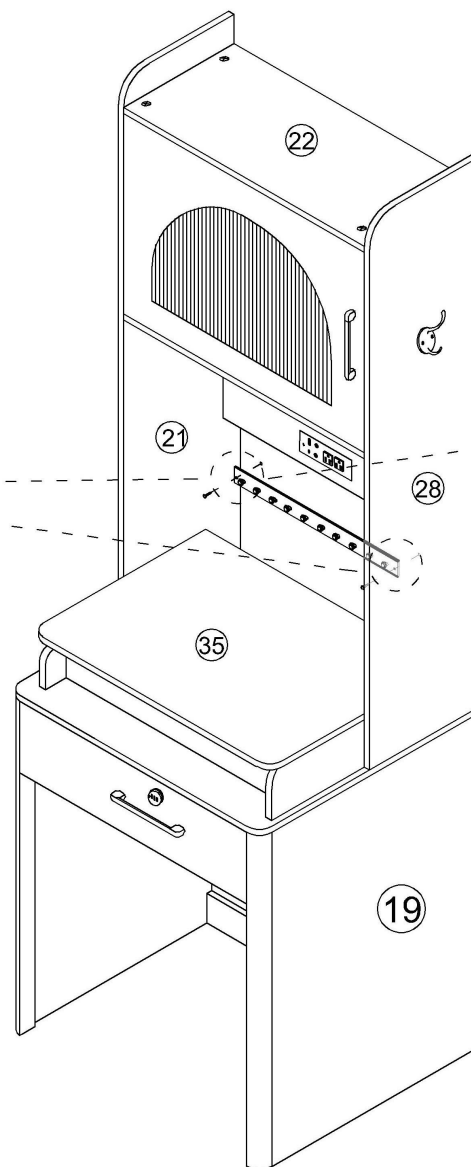


Pay attention to the direction of the crystal hook








Step 88

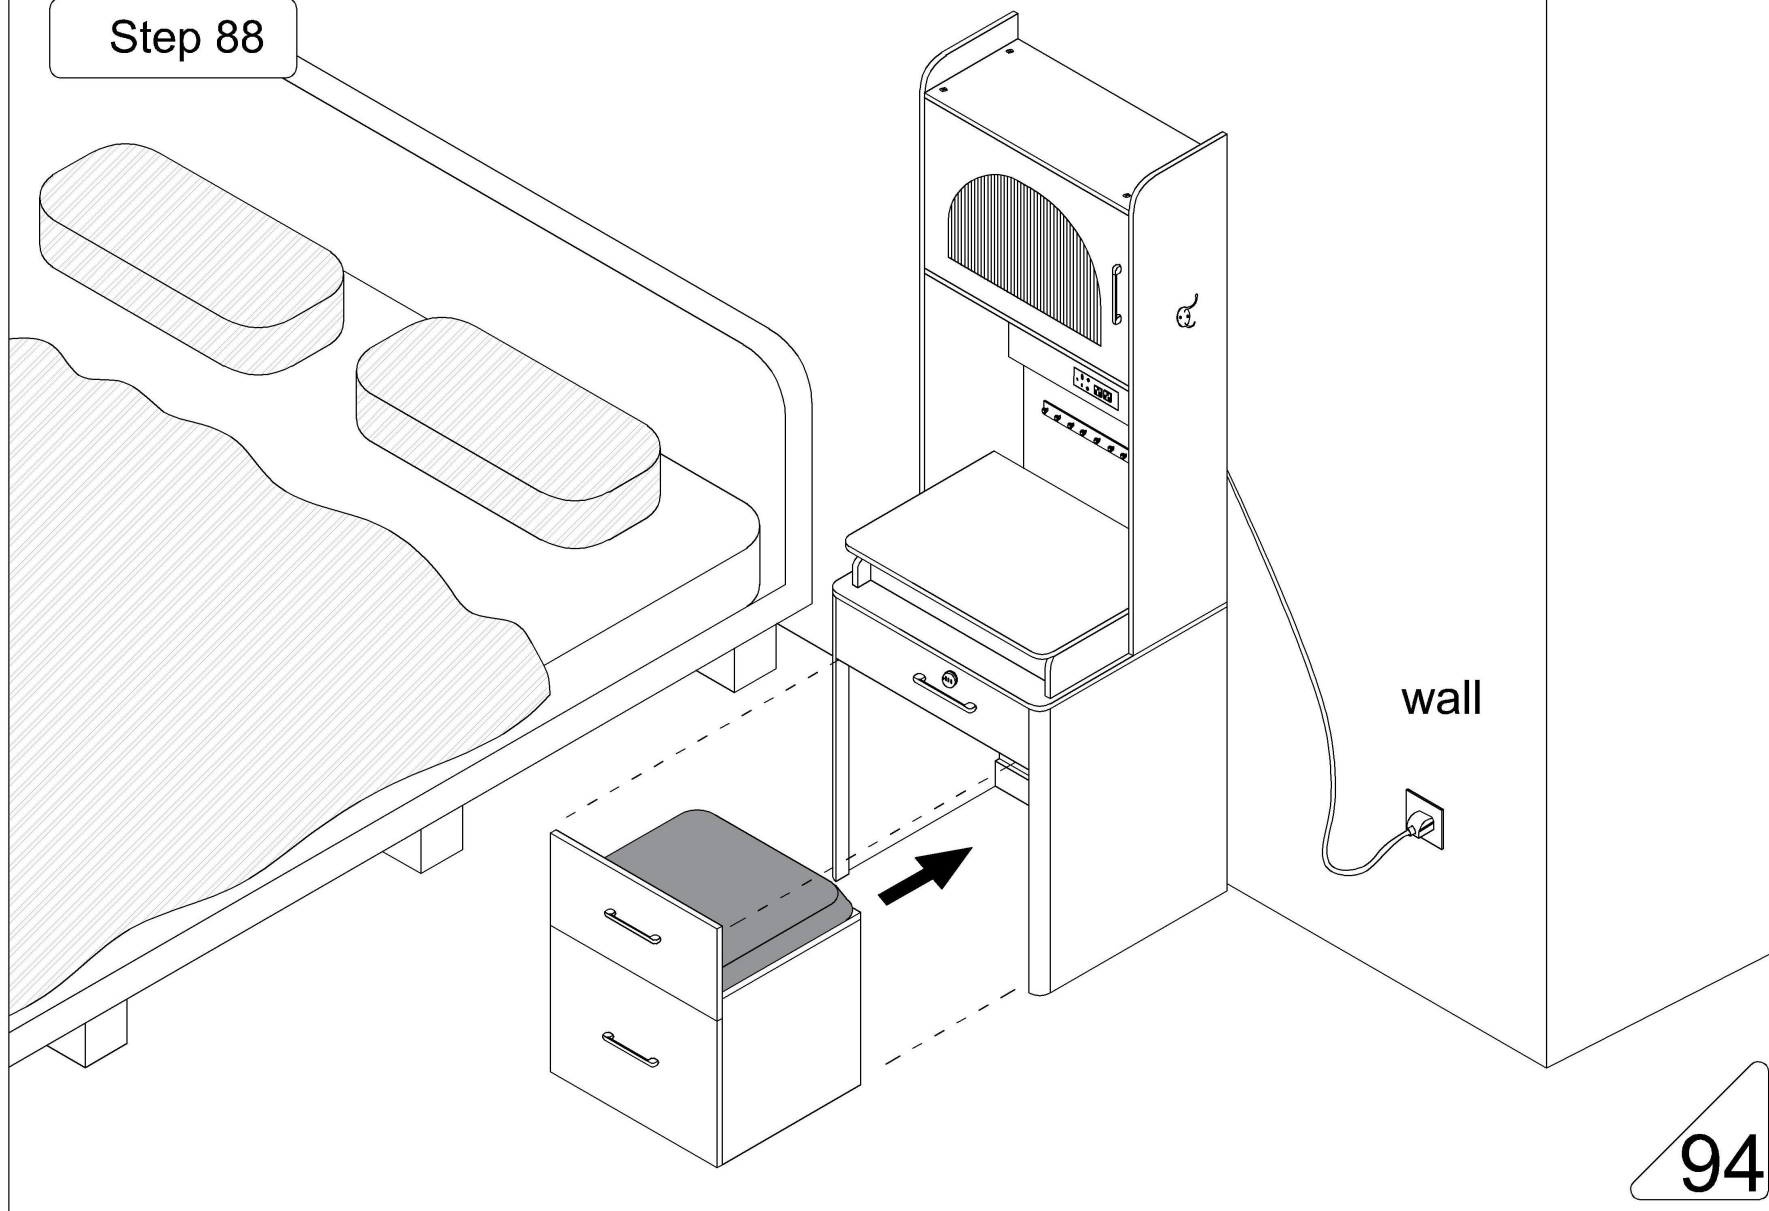



Step 89

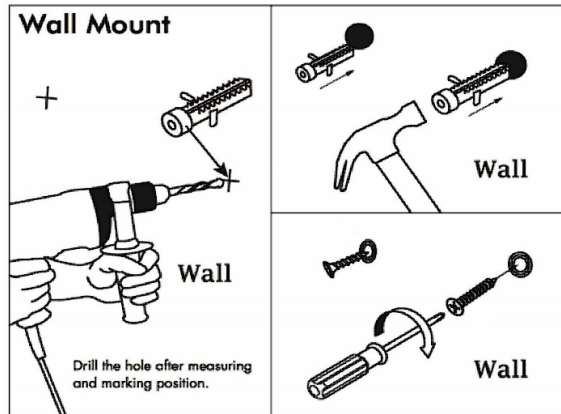

Install as required

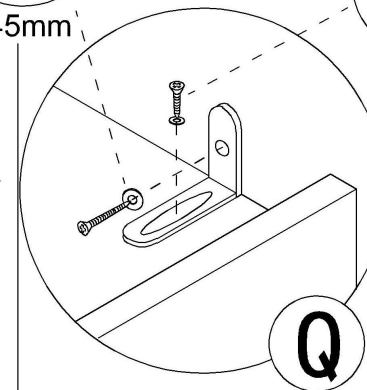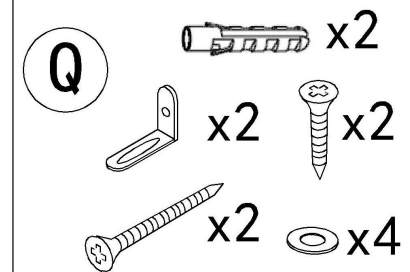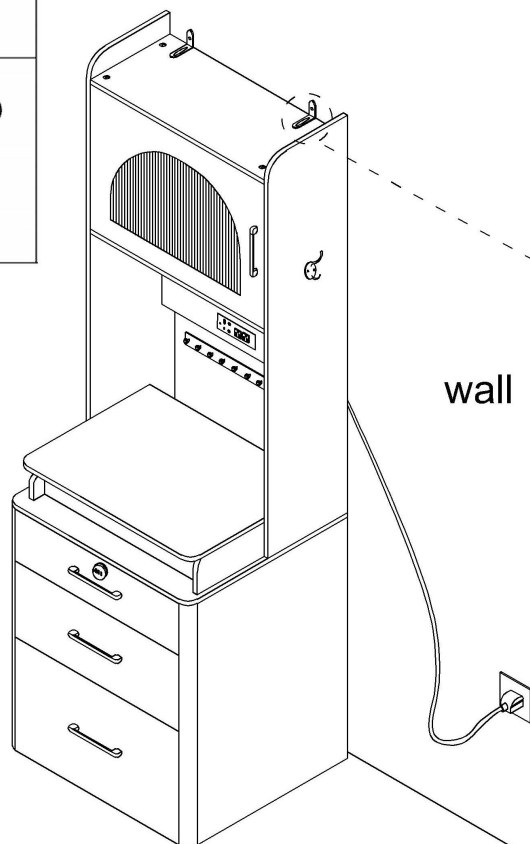

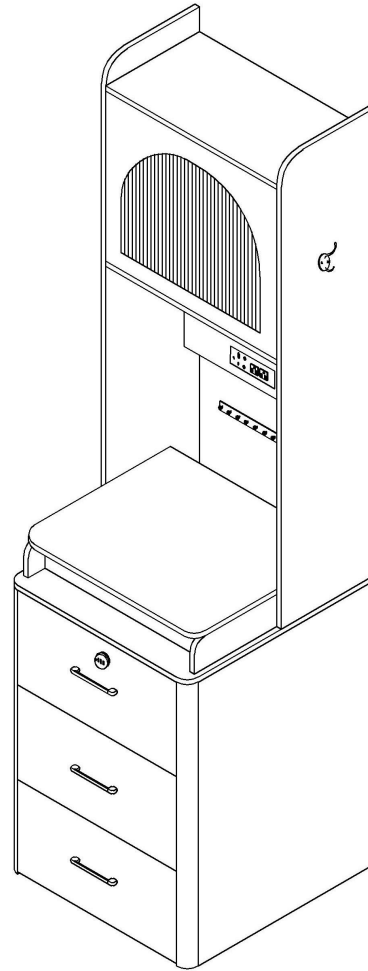

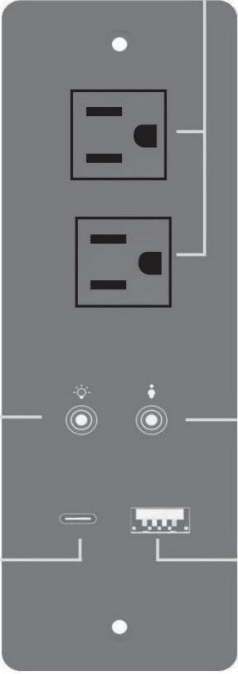	User's Guide Thank you for purchasing this product. To use this product, please plug it into a 12VDC power supply. Please use if the product works normally after connecting to power. Introduction The box is an intelligent controller. It has 1 USB output port 1 Type-c port and can distribute the current output up to 5VDC-2A. With 2 touch buttons, it can turn. ON/OFF the light, change light colors, and adjust the light luminance.
Operation  This touch button is used to turn on/off, change colors, and adjust brightness. A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance.	
 This touch button is used to turn on/off the induction function. A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds. B. Long touch to turn off the induction function. C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.	
Type-c output port Light Button  USB output port Induction Button Socket	ATTENTION PLEASE 1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity. 2. If bubbles appear on the panel, remove the protective film. 3. If you have any questions when installing, please feel free to contact us. Thank you.