



# Iron Plains® | K-20213-PFG

33" oval drop-in / undermount / vessel bathroom sink

## Features

- Elongated oval basin
- No faucet holes; requires wall- or counter-mount faucet
- With overflow
- Enameled Fresh Green interior and painted Fresh Green underside



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

- PFG-34 Fresh Green Exterior with Fresh Green Interior



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
8-06-2026 17:03 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*ADA, CSA B651 compliant when installed to the specific requirements of these regulations.*

ADA CSA B651

ASME A112.19.1/CSA B45.2  
ADA  
ICC/ANSI A117.1  
CSA B651

## Technical Information

|                      |                    |
|----------------------|--------------------|
| With Overflow:       | Yes                |
| Drain Hole Diameter: | 1-3/4" (44 mm)     |
| Basin Configuration: | Single Bowl        |
| Basin Length:        | 31-13/16" (808 mm) |
| Basin Width:         | 14-7/16" (367 mm)  |
| Basin Depth:         | 4-11/16" (120 mm)  |

## Material

- KOHLER® enameled cast iron
- Acid-resistant enamel finish

## Recommended Products/Accessories



K-23726 Drain treatment  
K-23725 Cast iron cleaner

## Warranty


*See website for detailed warranty information.*

KOHLER® Enameled Cast Iron Kitchen and Bathroom Sink  
Lifetime Limited Warranty



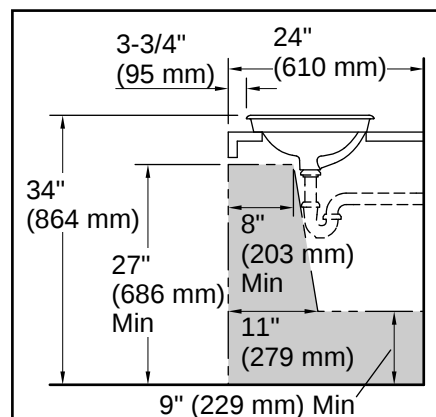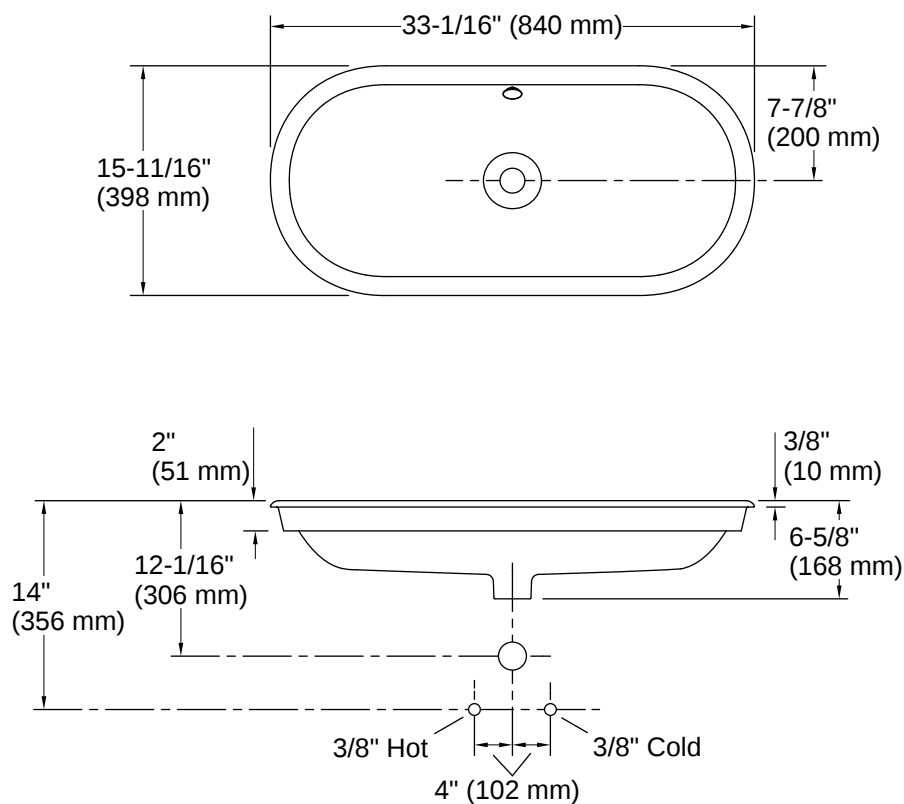

## Recommended ADA Installation



## Installation

- Vessel, drop-in, or undermount

## Installation Notes

*Install this product according to the installation instructions.*

NOTICE: Countertop manufacturer or cutter must use the current product template available at [www.kohler.com](http://www.kohler.com) or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cut-out template is used. ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

