



### FEATURES:

- Counter top mounted
- Aerated, yellow plastic spray outlet, dust cap
- $\frac{3}{8}$  in. NPT female brass, chrome-plated
- Self-closing valve
- Brass, chrome-plated squeeze handle activator
- 6 ft. reinforced hose
- $\frac{3}{8}$  in. NPTM inlet, swivel connection
- 1.5 gpm @ 30 psi
- Universal Emergency Sign Included

### COMPLIANCE:

- All units meet existing ANSI/ISEA Z358.1 standards and OSHA rules for drench hoses

### OPTIONS:

ADD SUFFIX TO MODEL #

- Vacuum breaker

-VB

### WARRANTY:

- 3 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720  
P: 800-537-2107 | F: 800-977-2747  
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: JANUARY 2015




Management Systems  
Registered to ISO 9001

# SPEAKMAN®

## Drench hose SE-921

SPECIFICATION

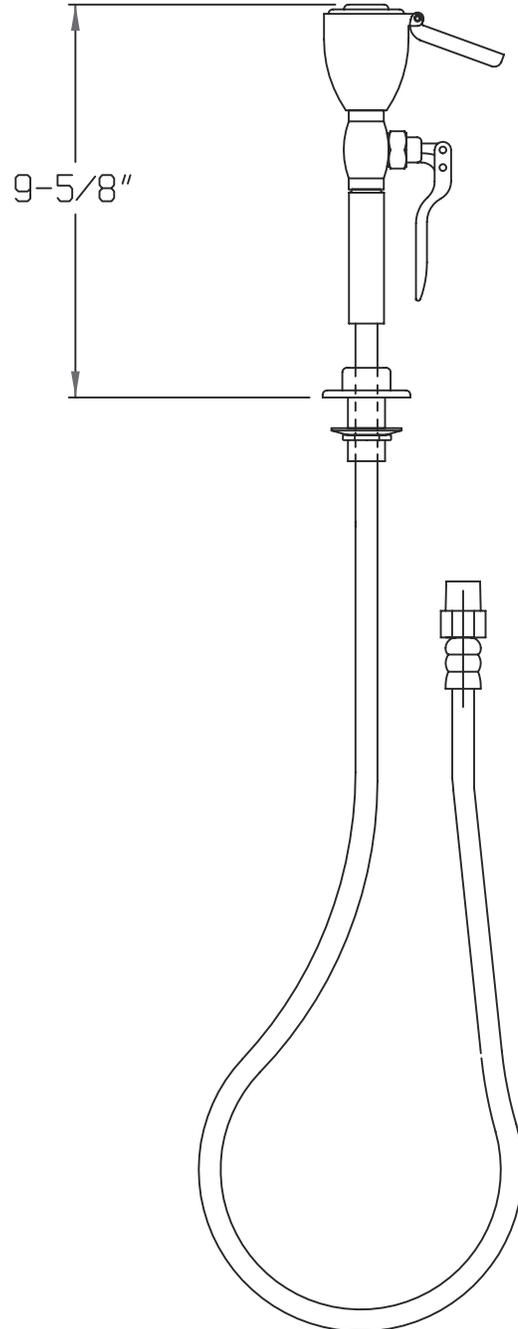

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720  
P: 800-537-2107 | F: 800-977-2747  
WWW.SPEAKMANCOMPANY.COM



Management Systems  
Registered to ISO 9001

REVISION DATE: JANUARY 2015