

R9ICA

6" IC Line Voltage Shallow Housing, Airtight



PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

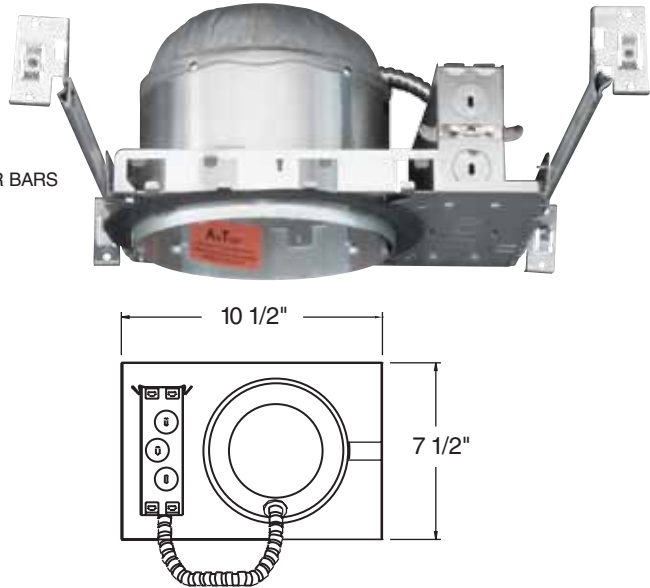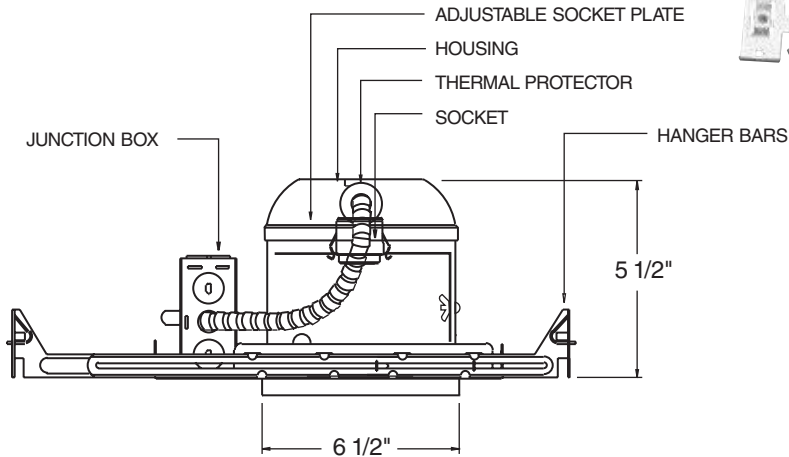

PRODUCT SPECIFICATIONS

Housing Features: Shallow housing with Integral thermal protector, guards against improper lamping. Single wall construction. Adjustable socket bracket allows for the use of different lamp types and sizes as well as proper and consistent lamp positioning.

R9ICA housings meets restricted airflow requirements. (Per ASTM E-283 Standard).

5 1/2" height allows use in 2 x 6 construction.

Lamp: 120V, 75W Maximum,
A / 9 / A21 / R30 / PAR30 / PAR30L base type.

Lamp Holder: Medium base socket.

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cutout.

R9ICA meets with California Title 24 requirements.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout through branch wiring, maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Hanger bars span 24" can be repositioned 90°. Housing accommodates various ceiling thickness.

Mounting Frame: Stamped galvanized steel for corrosion resistance.

Labels:

- U.L. listed for damp locations.
- U.L. listed for feed through.
- U.L. listed for direct contact with insulation.

CATALOG NUMBER

Example: R9ICA-ELM30W

See trims page for variety of trims available.

