


Prior to Installation



This item is recommended to be installed by a licensed plumber or professional only. Please ensure to observe all local and building code requirements. Shut off water supply prior to installation.

Tools You May Need

Wrench



Tape Measure

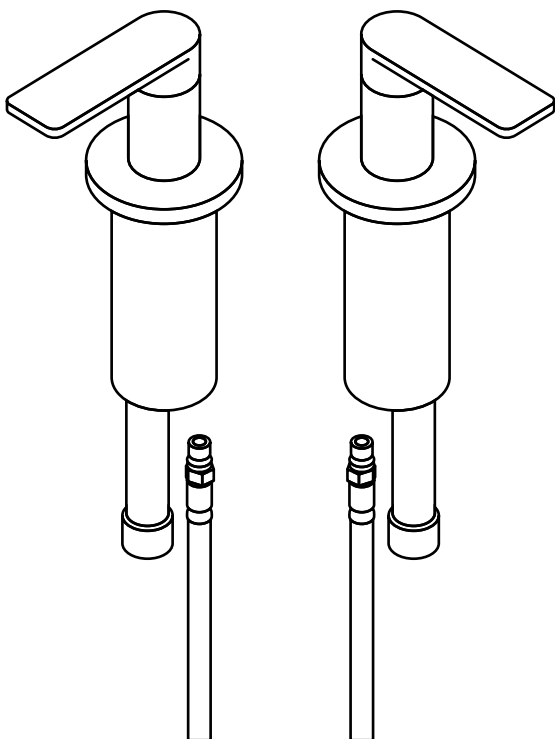



1. Connect Hoses

Connect flexible hoses to handles, if not already assembled.

2. Install Supply Lines

Press firmly and screw in the flexible hose water supply lines. Screw in the threaded shaft. Tighten with fingers

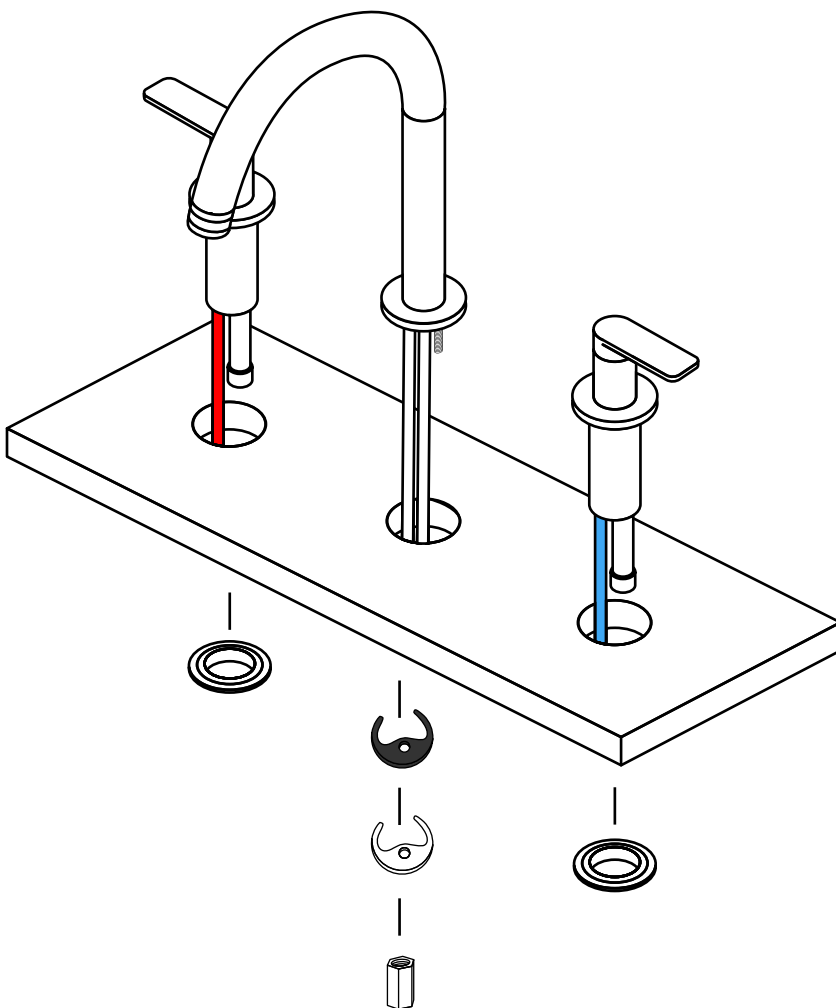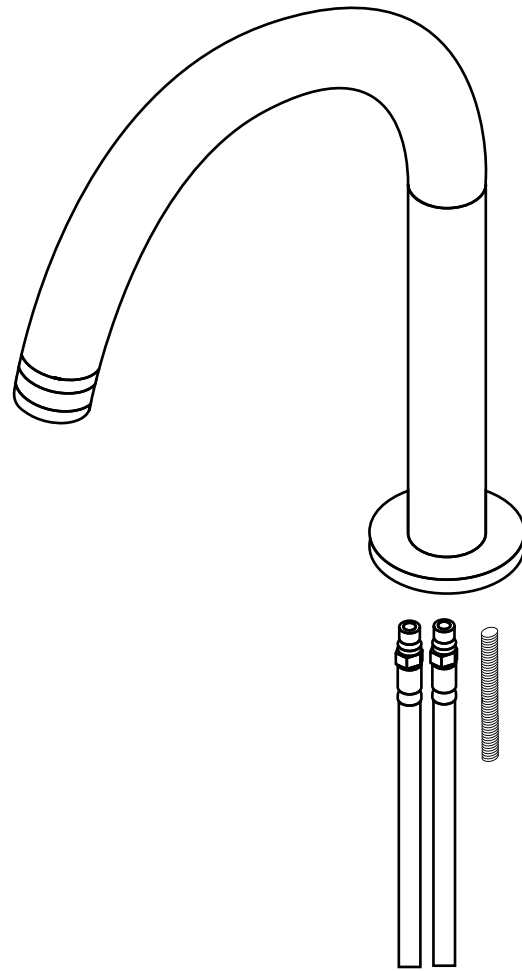


3. Mount To Countertop

Place the hoses and shaft through the countertop. Position the rubber and metal washers on the shaft. Tighten faucet to sink with the nut. Tighten with a wrench. Tighten nuts on handles. Overtightening will cause ceramic sinks to chip.

4. Connect Water Lines

Connect spout water lines to handles. Connect handle water lines to angle stop valves water supply. Hot water supply on the left, cold on the right.

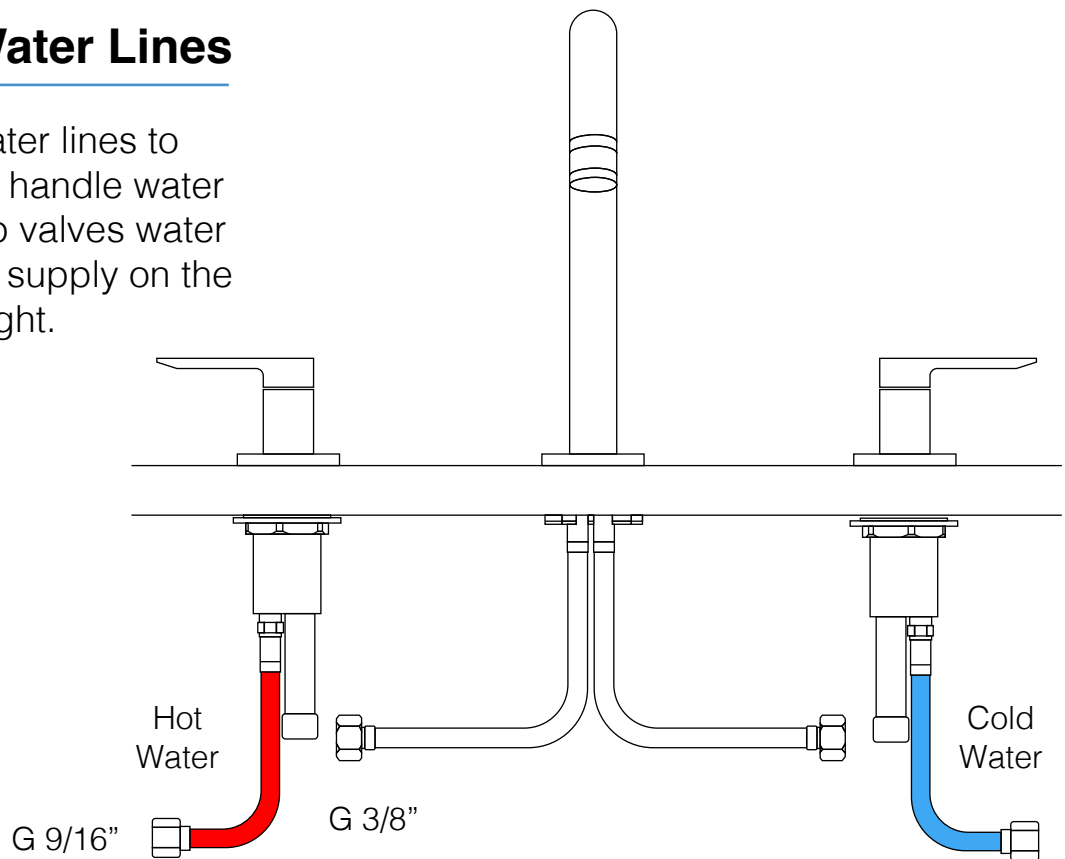

5. Sink Accessories

If needed, complete your sink installation by adding the preferred plumbing accessories, such a click clack drain and p-trap.

