


Features

- *ExoCrylic™*
- *Drop-in or three-wall alcove*
- *Six individually adjustable ProFlex® hydro-massage jets*
- *Pump with air switch and grounding-type plug-in cord*
- *Molded lumbar support and armrests for comfort*
- *Optional K-9696 whirlpool trim kit in additional finishes*
- *Optional K-1284 removable apron*
- *60" (1524 mm) x 36" (914 mm) x 18-1/8" (460 mm)*

WHIRLPOOL BATH K-1139 ALSO K-1139-L, K-1139-R

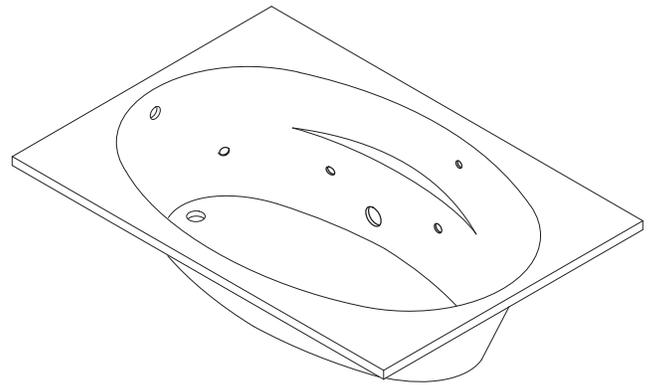

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.19.7/CSA B45.10*
- *CSA B45.5/IAPMO Z124*
- *UL 1795*

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1139	Whirlpool bath – drop-in (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1139-L	Whirlpool bath – tile flange, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1139-R	Whirlpool bath – tile flange, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
Recommended Accessories			
K-11677	Swiftflo™ adjustable trip lever bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB
Optional Accessories			
K-1284	Removable apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-9696	Jet trim kit (metal finishes)	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other _____

Product Specification

The ExoCrylic whirlpool bath shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 18-1/8" (460 mm) in height. Whirlpool shall have six individually adjustable ProFlex hydro-massage jets, molded lumbar support and armrests for comfort, and pump with air switch and grounding-type plug-in cord. Whirlpool shall be for drop-in [K-1139] or alcove [K-1139-L, K-1139-R] installations. Whirlpool shall feature optional K-1284 removable apron and K-9696 whirlpool trim kit in additional finishes. Whirlpool bath shall be Kohler Model K-1139-____ or K-1139-____-____.

PROFLEX® 6036

Technical Information

Fixture*:			
Bathing well:			
Basin area, bottom	46" (1168 mm) x 15" (381 mm)		
Basin area, top	55" (1397 mm) x 25" (635 mm)		
Weight	55 lbs (25 kg)		
To overflow:			
Water depth	14" (356 mm)		
Capacity	57 gal (216 L)		
* Approximate measurements for comparison only.			
Drop-in cutout	58-1/2" (1486 mm) x 34-1/2" (876 mm)		
Pump:	V	Hz	A
1-speed	120	60	7.5

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Locate the outlet behind the whirlpool and within 24" (610 mm) of the pump.	


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 37 lbs/square foot (181 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

No change in measurements if connected with drain illustrated. (K-11677)

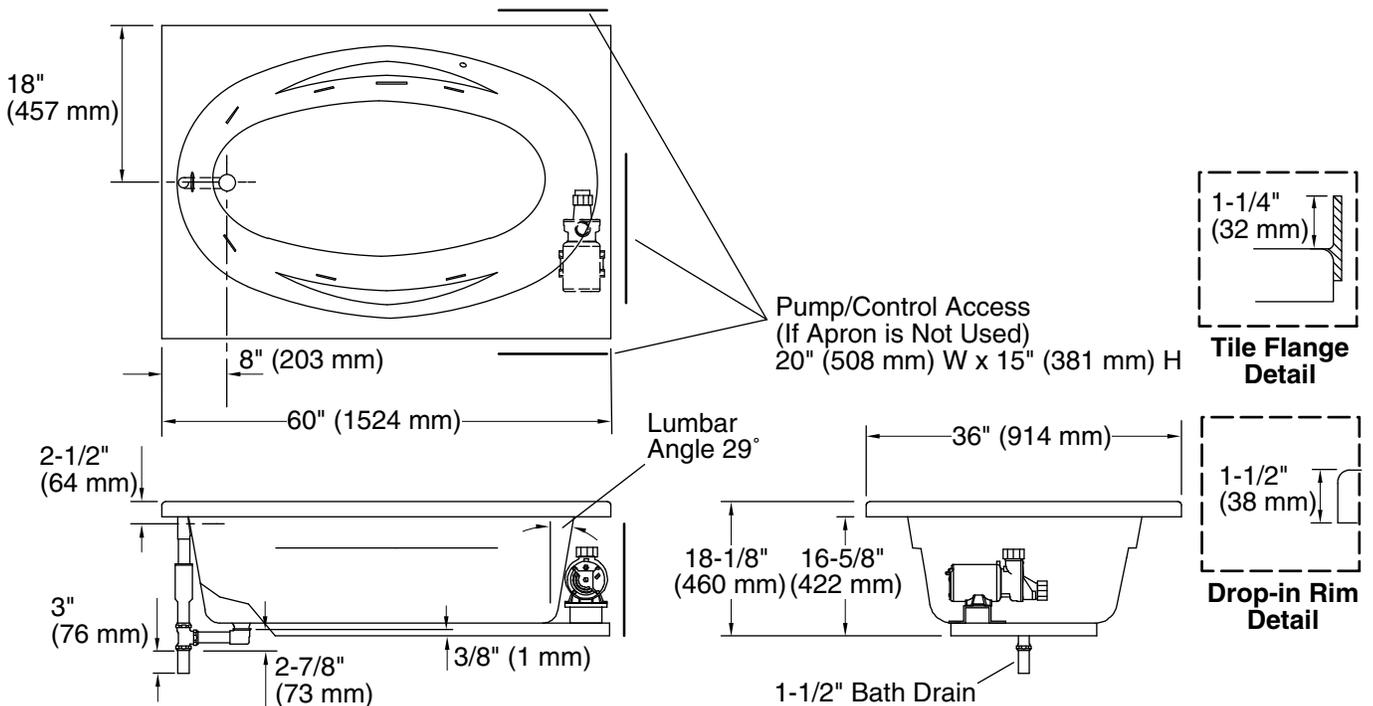

Product Diagram